

D

C

B

A

D

C

B

A


4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

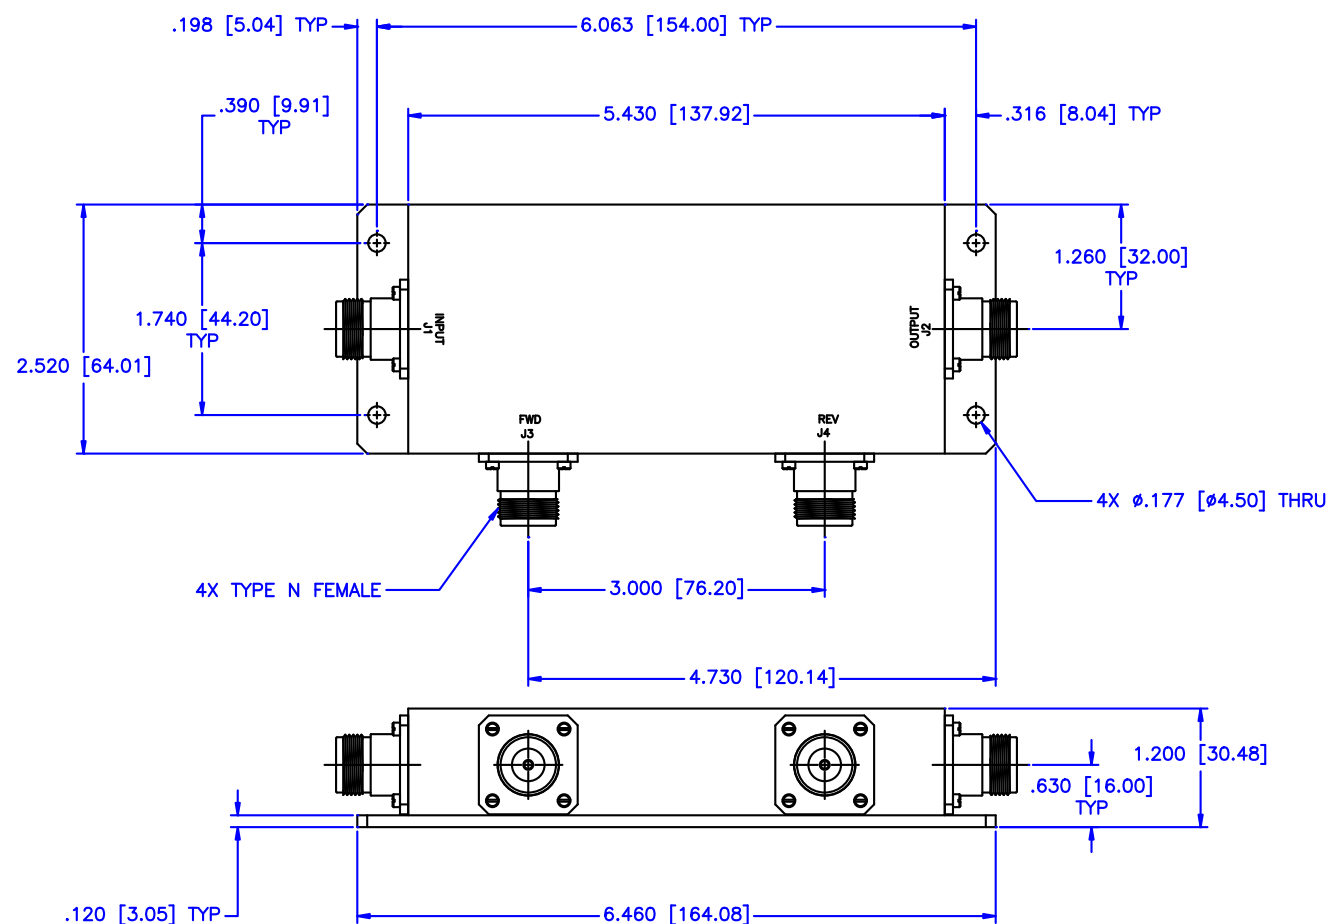

SPECIFICATIONS

FREQUENCY RANGE: 0.5–32 MHz
FREQUENCY SENSITIVITY: $\pm 0.30\text{dB}$
INSERTION LOSS: 0.20dB Max.
DIRECTIVITY: 25dB Min.
VSWR PRIME LINE: 1.10:1 Max.
POWER: 3000 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A	
DRAWN: Paboon Luekhamhan		DATE: 03-27-1999		DRAWING TITLE: HIGH POWER DUAL DIRECTIONAL COUPLER	
APPROVED: T. Nguyen		DATE: 03-27-1999		PART NO. HDL-18-40	
		THIRD ANGLE PROJECTION		CAGE CODE: OD2L5	
				SIZE: C	
				REV: N/A	
				DWG NO. 81249	
				DO NOT SCALE THE DRAWING	

4

3

2

1