


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

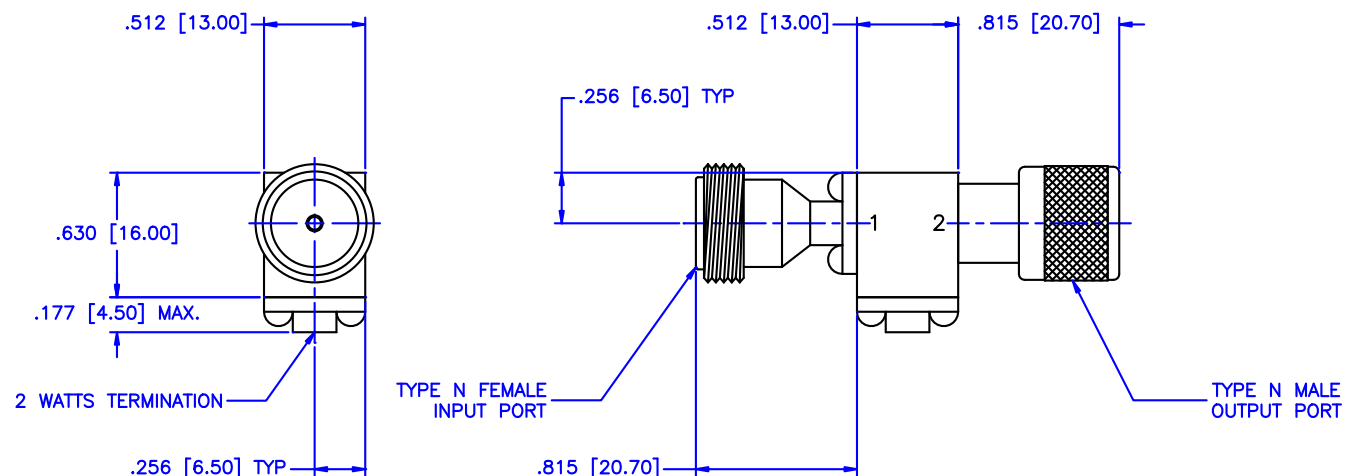

FREQUENCY RANGE	-54°C TO +85°C			POWER RATING	
	ISOLATION	INSERTION LOSS	V.S.W.R.	PEAK POWER	AVG POWER
(GHz)	(dB Min.)	(dB Max.)	(Max.)	(W)	(W)
10.95 to 12.75	18	0.50	1.35	20	2

MATERIAL: 				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL ISOLATOR		SHEET: N/A	
DRAWN: Paiboon Luekhamhan		DATE: 02-09-2007		PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.: IS-63-2/NFI/NMO	
APPROVED: T. Nguyen		DATE: 02-09-2007		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: 0D2L5	
				SIZE: N/A		REV: N/A	
				DO NOT SCALE THE DRAWING		DWG NO.: 82770	