

# Frequency Synthesizer KSN-3260A-1M19+

50Ω 3030 to 3264 MHz

## The Big Deal

- Low phase noise and spurious
- Robust design and construction
- Small size 0.80" x 0.58" x 0.15"



CASE STYLE: DK1042

## Product Overview

The KSN-3260A-1M19+ is a Frequency Synthesizer, designed to operate from 3030 to 3264 MHz for public safety communication application. The KSN-3260A-1M19+ is packaged in a metal case (size of 0.80" x 0.58" x 0.15") to shield against unwanted signals and noise.

## Key Features

Feature	Advantages
Low phase noise and spurious: • Phase Noise: -87 dBc/Hz typ. @ 10 kHz offset • Comparison Spurious: -100 dBc typ. • Reference Spurious: -100 dBc typ.	Low phase noise and spurious improve system EVM (Error Vector Magnitude).
Robust design and construction	To enhance the robustness of KSN-3260A-1M19+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.
Small size, 0.80" x 0.58" x 0.15"	The small size enables the KSN-3260A-1M19+ to be used in compact designs.



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

50Ω 3030 to 3264 MHz

**Features**

- Integrated VCO + PLL
- Low phase noise and spurious
- Robust Design and Construction
- Low operating voltage (VCC VCO=+5V, VCC PLL=+3V)
- Small size 0.80" x 0.58" x 0.15"



CASE STYLE: DK1042  
PRICE: \$29.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)


The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

**Applications**

- Public safety communication

**General Description**

The KSN-3260A-1M19+ is a Frequency Synthesizer, designed to operate from 3030 to 3264MHz for public safety communication application. The KSN-3260A-1M19+ is packaged in a metal case (size of 0.80" x 0.58" x 0.15") to shield against unwanted signals and noise. To enhance the robustness of KSN-3260A-1M19+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.

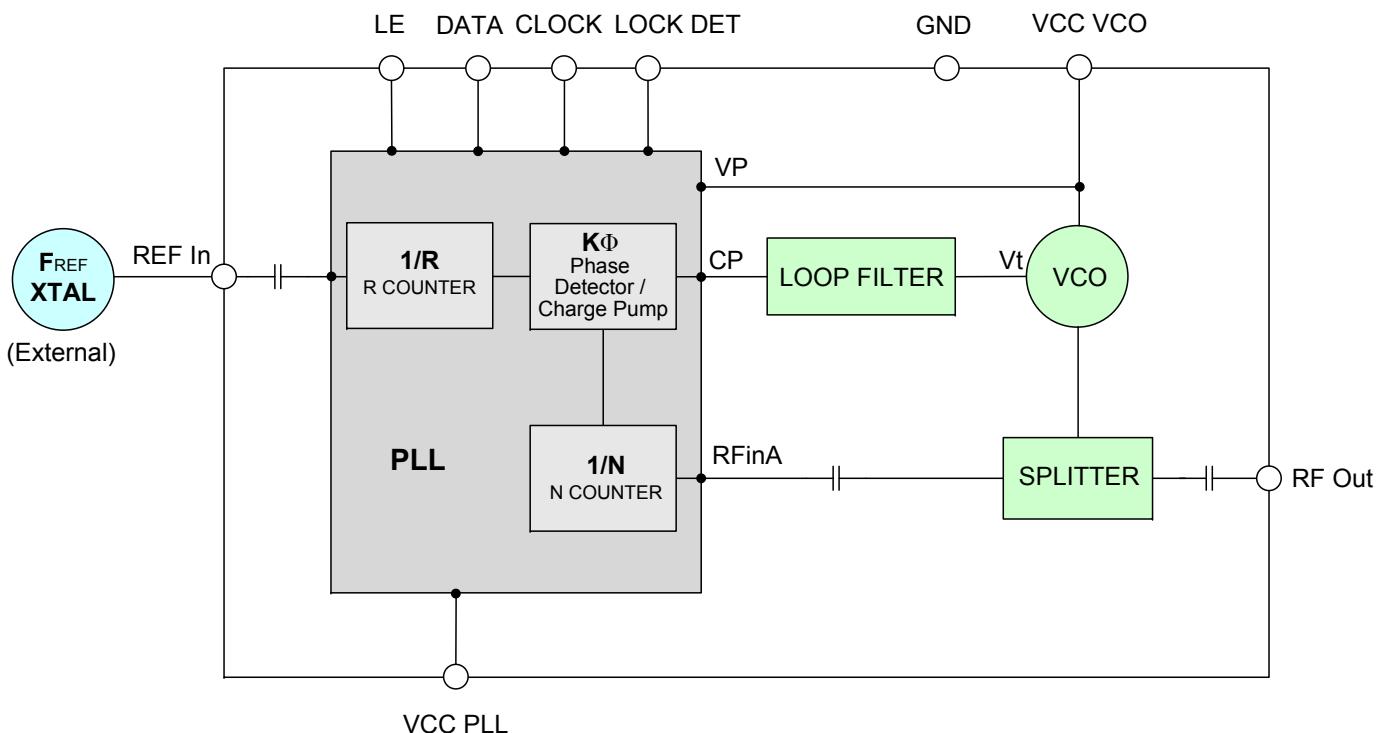**Simplified Schematic**

 **Mini-Circuits®**

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED  RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



**The Design Engineers Search Engine** finds the model you need, Instantly • For detailed performance specs & shopping online see [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. OR  
M126018  
EDR-9322/1F1  
KSN-3260A-1M19+  
Category-A1  
RAV  
100321  
Page 2 of 11

# Frequency Synthesizer

# KSN-3260A-1M19+

## Electrical Specifications (over operating temperature -40°C to +85°C)

Parameters	Test Conditions	Min.	Typ.	Max.	Units
Frequency Range	-	3030	-	3264	MHz
Step size	-	-	1000	-	kHz
Settling Time	Within $\pm 1$ kHz	-	2	-	mSec
Output Power	-	-1.0	+2.3	+4.0	dBm
SSB Phase Noise	@ 100 Hz offset @ 1 kHz offset @ 10 kHz offset @ 100 kHz offset @ 1 MHz offset	- - - - -	-79 -85 -87 -115 -138	- -77 -78 -111 -132	dBc/Hz
Integrated SSB Phase Noise	@ 100 Hz to 1 MHz	-	-41	-	dBc
Reference Spurious Suppression	Ref. Freq. 40 MHz	-	-100	-80	
Comparison Spurious Suppression	Step Size 1000 kHz	-	-100	-80	
Non - Harmonic Spurious Suppression	-	-	-90	-	
Harmonic Suppression	-	-	-30	-20	
VCO Supply Voltage	+5.00	+4.75	+5.00	+5.25	V
PLL Supply Voltage	+3.00	+2.85	+3.00	+3.15	
VCO Supply Current	-	-	50	60	mA
PLL Supply Current	-	-	15	20	
Reference Input (External)	Frequency Amplitude Input impedance Phase Noise @ 1 kHz offset	40 (square wave) 1 - -	40 1 100 -145	- - - -	MHz V <sub>pp</sub> KΩ dBc/Hz
RF Output port Impedance	-	-	50	-	Ω
Input Logic Level	Input high voltage Input low voltage	- -	2.55 -	- 0.55	V
Digital Lock Detect	Locked Unlocked	- -	2.45 -	- 0.40	V
Frequency Synthesizer PLL	-	ADF4106			
PLL Programming	-	3-wire serial 3V CMOS			
Register Map @ 3264 MHz	F_Register N_Register R_Register	- - -	(MSB) 010101101000000010010011 (LSB) (MSB) 000000001100110000000001 (LSB) (MSB) 000100000000000010100000 (LSB)		

## Absolute Maximum Ratings

Parameters	Ratings
VCO Supply Voltage	5.3V
PLL Supply Voltage	3.6V
VCO Supply Voltage to PLL Supply Voltage	-0.3V to +5.8V
Reference Frequency Voltage	-0.3Vmin, VCC PLL +0.3Vmax
Data, Clock, LE Levels	-0.3Vmin, VCC PLL +0.3Vmax
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

Permanent damage may occur if any of these limits are exceeded



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

**Minicircuits.com**

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

## Typical Performance Data

FREQUENCY (MHz)	POWER OUTPUT (dBm)			VCO CURRENT (mA)			PLL CURRENT (mA)		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
3030	2.64	2.38	2.01	47.58	50.29	53.10	12.77	14.54	17.47
3037	2.66	2.44	2.08	47.16	50.33	53.13	12.80	14.58	17.51
3064	2.55	2.52	2.20	47.20	50.41	53.20	12.83	14.61	17.53
3091	1.95	2.02	1.68	47.31	50.49	53.25	12.83	14.62	17.54
3118	2.10	1.95	1.58	47.62	50.72	53.43	12.82	14.64	17.57
3145	2.65	2.48	2.13	47.81	50.92	53.59	12.83	14.64	17.57
3172	2.36	2.45	2.15	47.83	50.97	53.63	12.88	14.68	17.59
3199	1.87	1.91	1.56	48.03	51.09	53.71	12.90	14.71	17.64
3226	2.29	2.09	1.67	48.30	51.29	53.87	12.85	14.68	17.62
3253	2.64	2.43	2.04	48.31	51.35	53.93	12.88	14.69	17.63
3264	2.55	2.48	2.05	48.27	51.36	53.93	12.89	14.69	17.62

FREQUENCY (MHz)	HARMONICS (dBc)					
	F2			F3		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
3030	-29.81	-31.30	-33.31	-33.13	-36.62	-39.73
3037	-28.92	-30.63	-32.97	-30.77	-35.72	-38.88
3064	-28.00	-28.54	-30.86	-31.50	-39.25	-40.70
3091	-27.85	-30.06	-32.50	-35.22	-42.48	-40.55
3118	-27.12	-27.85	-30.05	-42.11	-39.93	-37.60
3145	-27.36	-29.64	-32.12	-46.31	-39.31	-37.77
3172	-26.86	-28.14	-30.75	-44.53	-40.81	-39.70
3199	-26.45	-29.27	-31.99	-43.46	-41.17	-39.61
3226	-27.95	-29.19	-31.92	-40.64	-38.29	-36.41
3253	-28.89	-31.71	-34.88	-36.74	-34.99	-35.72
3264	-27.70	-30.26	-34.11	-38.53	-37.34	-37.23



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS +25°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
	3030	-79.64	-87.12	-86.32	-117.10
3037	-80.58	-85.26	-86.20	-117.04	-137.84
3064	-83.09	-86.87	-86.55	-117.10	-138.19
3091	-78.12	-89.28	-87.47	-117.29	-138.38
3118	-80.55	-85.17	-86.81	-117.31	-138.13
3145	-81.22	-85.02	-86.93	-116.76	-137.93
3172	-81.05	-87.12	-86.02	-116.15	-137.27
3199	-80.37	-85.06	-86.01	-115.89	-136.78
3226	-79.58	-86.49	-87.29	-115.70	-136.63
3253	-79.19	-85.43	-86.84	-115.27	-136.31
3264	-81.18	-84.77	-87.48	-115.28	-136.44

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS -45°C					FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS +85°C				
	100Hz	1kHz	10kHz	100kHz	1MHz		100Hz	1kHz	10kHz	100kHz	1MHz
3030	-82.13	-88.68	-84.83	-117.52	-138.42	3030	-80.20	-84.05	-84.34	-115.19	-136.17
3037	-82.09	-87.45	-84.76	-117.56	-138.79	3037	-80.33	-83.78	-84.49	-115.27	-136.35
3064	-82.71	-86.42	-84.96	-117.52	-138.35	3064	-87.18	-84.94	-84.73	-115.36	-136.61
3091	-79.16	-88.14	-85.32	-117.81	-139.65	3091	-83.56	-85.95	-85.00	-115.44	-136.48
3118	-81.41	-88.78	-85.66	-118.42	-140.05	3118	-83.13	-83.75	-85.23	-115.36	-136.55
3145	-80.28	-86.42	-85.60	-118.01	-139.76	3145	-82.22	-85.04	-85.04	-114.98	-136.18
3172	-81.98	-87.37	-85.43	-117.38	-139.01	3172	-81.29	-83.26	-84.93	-114.64	-135.60
3199	-79.22	-84.80	-85.63	-117.06	-138.59	3199	-79.34	-82.12	-85.51	-114.75	-135.54
3226	-81.57	-84.74	-86.63	-116.81	-137.69	3226	-80.82	-82.80	-86.31	-114.83	-135.75
3253	-81.72	-83.36	-86.50	-116.25	-137.43	3253	-82.25	-80.26	-84.62	-114.83	-135.83
3264	-78.02	-86.35	-86.76	-116.08	-137.01	3264	-81.16	-81.33	-85.03	-114.84	-135.78



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs &amp; shopping online see

minicircuits.com



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

COMPARISON SPURIOUS ORDER	COMPARISON SPURIOUS @Fcarrier 3030MHz+(n*Fcomparison) (dBc) note 1			COMPARISON SPURIOUS @Fcarrier 3147MHz+(n*Fcomparison) (dBc) note 1			COMPARISON SPURIOUS @Fcarrier 3264MHz+(n*Fcomparison) (dBc) note 1		
	n	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C
-5	-113.96	-111.72	-112.65	-113.28	-111.41	-112.46	-112.72	-111.32	-114.29
-4	-114.20	-111.08	-112.59	-111.36	-120.77	-123.19	-119.70	-123.53	-123.64
-3	-110.50	-111.80	-110.39	-108.19	-116.40	-120.70	-113.14	-118.90	-121.86
-2	-106.78	-107.16	-107.16	-107.07	-110.31	-117.59	-112.45	-117.02	-118.16
-1	-99.38	-101.04	-100.72	-99.39	-105.56	-106.96	-107.86	-110.33	-113.08
0 <sup>note 2</sup>	-	-	-	-	-	-	-	-	-
+1	-98.99	-100.53	-100.96	-100.54	-106.10	-110.37	-112.09	-111.39	-108.83
+2	-106.74	-108.04	-108.25	-106.33	-112.29	-112.69	-113.46	-116.62	-117.53
+3	-109.88	-110.02	-110.35	-113.05	-116.77	-118.32	-119.58	-117.81	-124.95
+4	-113.86	-111.89	-112.73	-113.81	-120.65	-120.90	-123.96	-126.33	-124.54
+5	-114.76	-113.73	-117.17	-115.93	-116.35	-124.70	-122.83	-119.08	-126.24

Note 1: Comparison frequency 1000 kHz

Note 2: All spurs are referenced to carrier signal (n=0).

REFERENCE SPURIOUS ORDER	REFERENCE SPURIOUS @Fcarrier 3030MHz+(n*Freference) (dBc) note 3			REFERENCE SPURIOUS @Fcarrier 3147MHz+(n*Freference) (dBc) note 3			REFERENCE SPURIOUS @Fcarrier 3264MHz+(n*Freference) (dBc) note 3		
	n	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C
-5	-93.95	-96.66	-101.20	-94.17	-96.84	-100.81	-96.40	-99.46	-101.64
-4	-94.19	-96.39	-99.25	-94.53	-97.13	-99.57	-95.70	-98.06	-100.84
-3	-105.44	-110.23	-114.99	-103.55	-107.87	-111.92	-106.25	-111.11	-115.82
-2	-99.19	-104.13	-106.15	-99.34	-103.37	-108.22	-100.58	-105.25	-108.70
-1	-95.61	-105.70	-100.55	-112.40	-104.11	-108.85	-97.71	-108.00	-95.19
0 <sup>note 4</sup>	-	-	-	-	-	-	-	-	-
+1	-96.48	-106.88	-90.90	-111.35	-104.27	-109.90	-99.85	-103.57	-93.46
+2	-100.51	-104.44	-108.67	-99.22	-103.63	-106.25	-100.66	-103.89	-107.45
+3	-104.58	-108.68	-113.04	-104.29	-107.93	-111.33	-105.72	-109.69	-110.79
+4	-95.13	-96.99	-100.02	-95.35	-97.25	-100.03	-96.37	-97.96	-100.30
+5	-95.99	-98.22	-103.13	-95.38	-97.40	-100.57	-96.69	-99.03	-101.59

Note 3: Reference frequency 40 MHz

Note 4: All spurs are referenced to carrier signal (n=0).



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant  
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




**The Design Engineers Search Engine** finds the model you need, Instantly • For detailed performance specs & shopping online see

[minicircuits.com](http://minicircuits.com)


Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms/terms.jsp](http://www.minicircuits.com/MCLStore/terms/terms.jsp).

## Typical Performance Curves


OUTPUT POWER Vs FREQUENCY

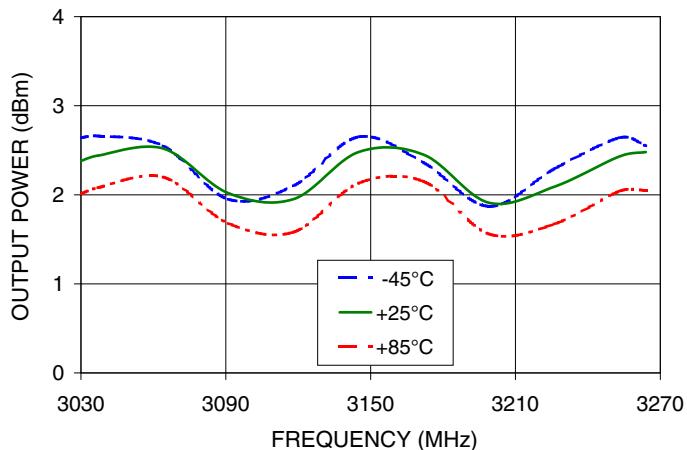

2nd HARMONIC Vs FREQUENCY

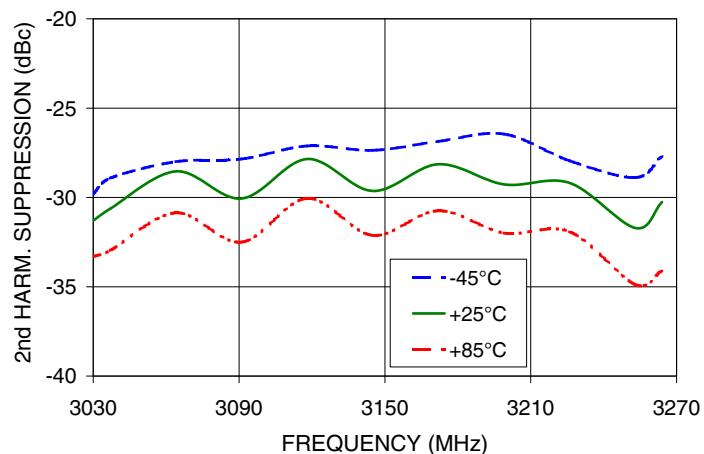

3rd HARMONIC Vs FREQUENCY

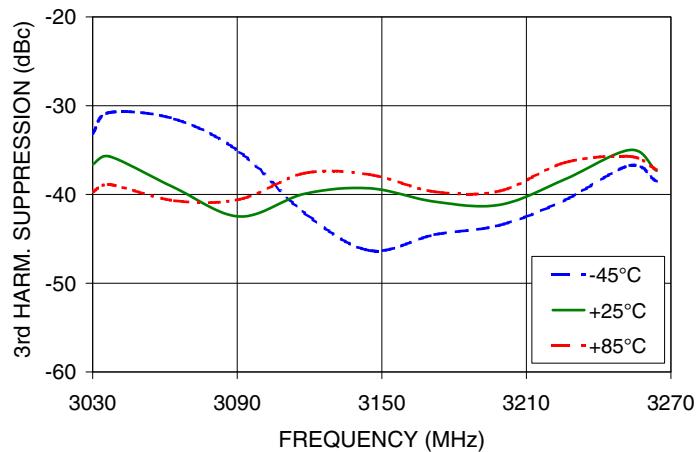

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED

RoHS compliant






P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs &amp; shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

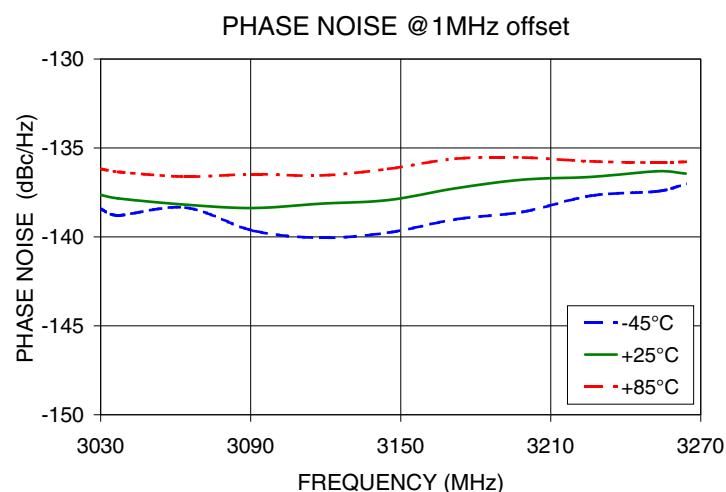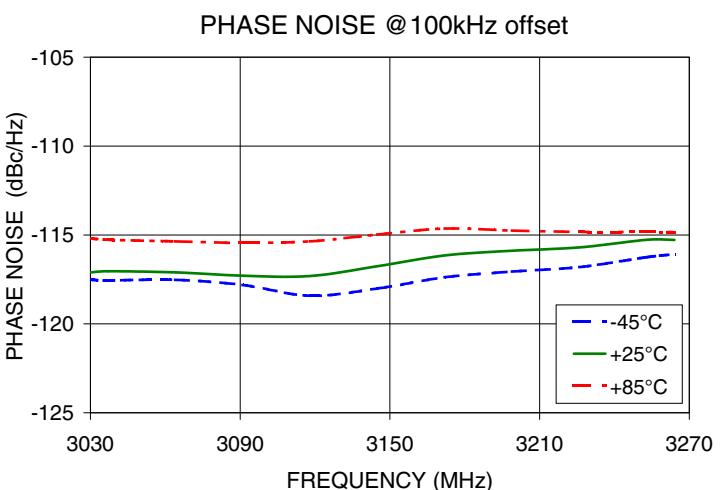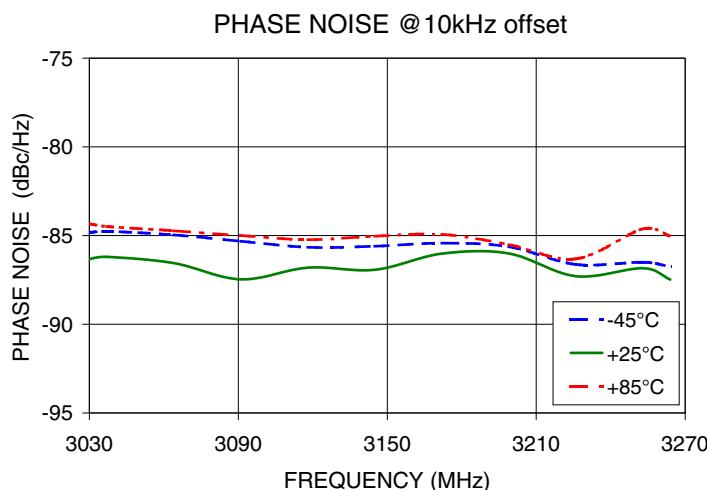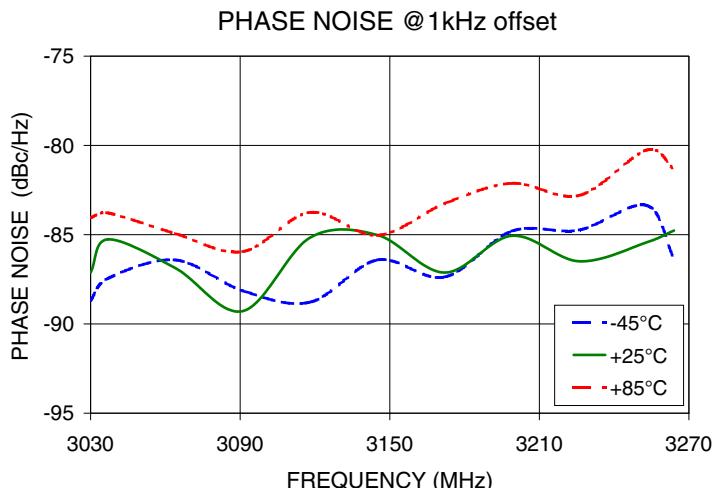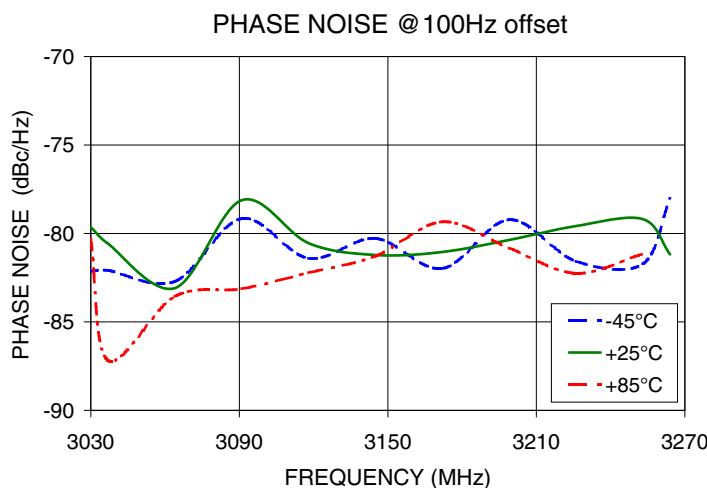







 **Mini-Circuits®**

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED  RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



**Digi-Key** The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

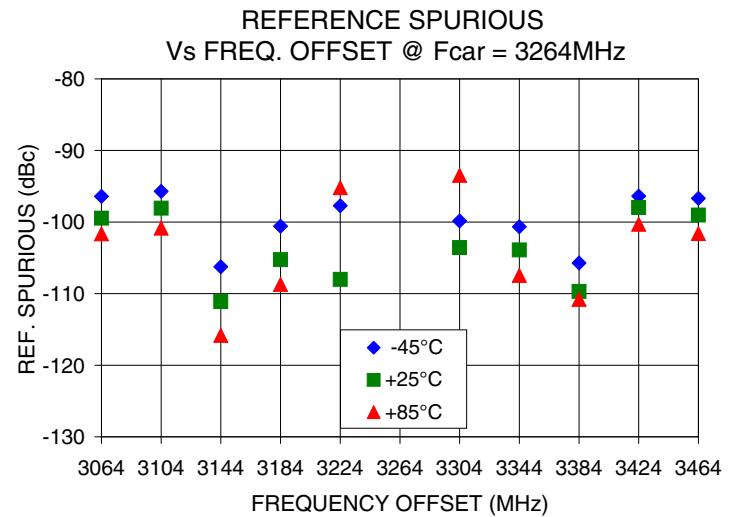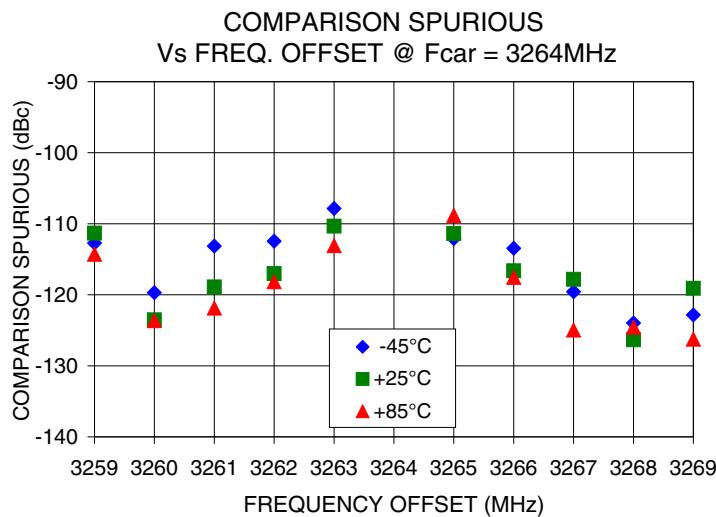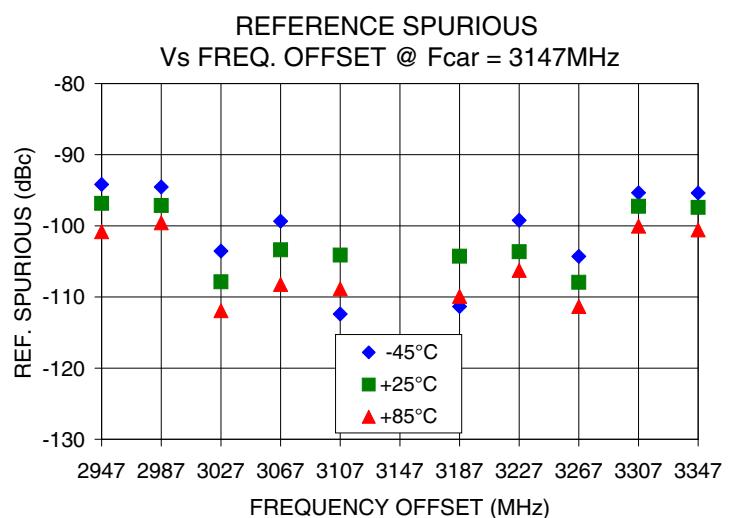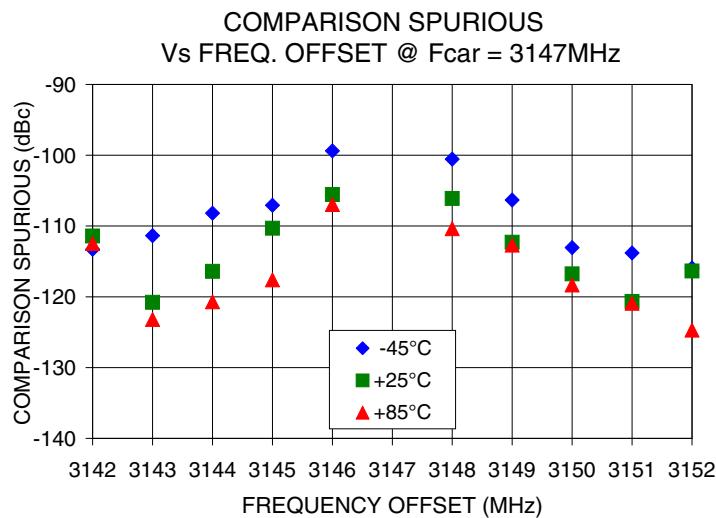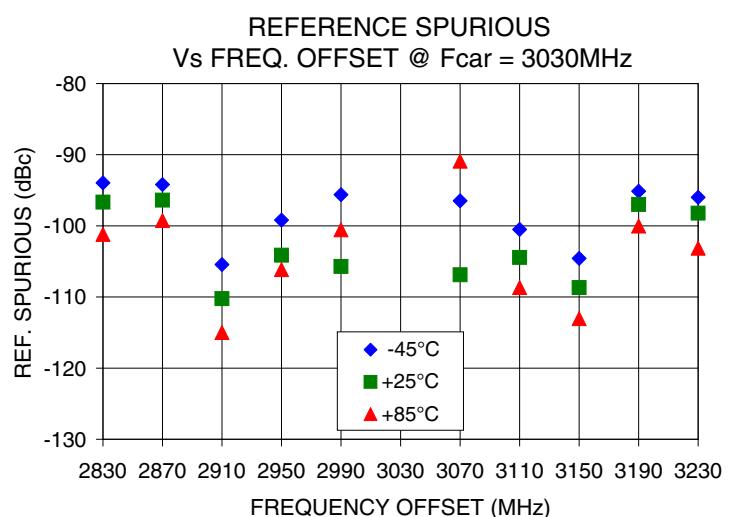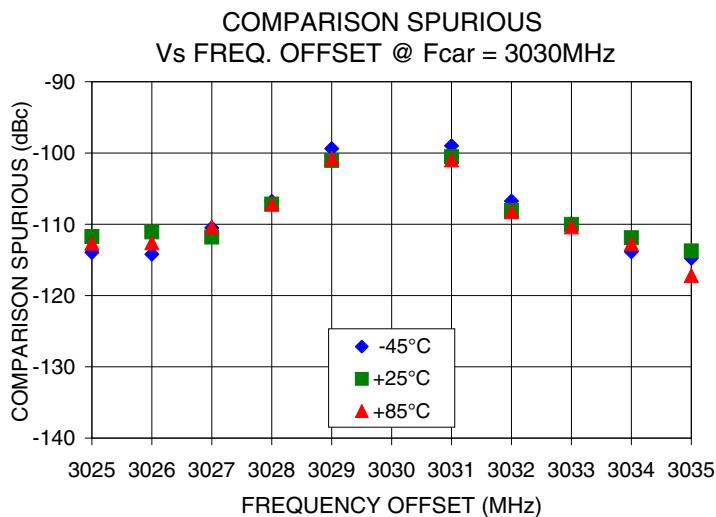

 **Mini-Circuits®**


IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED  RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



**Omni2** The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

## Pin Configuration

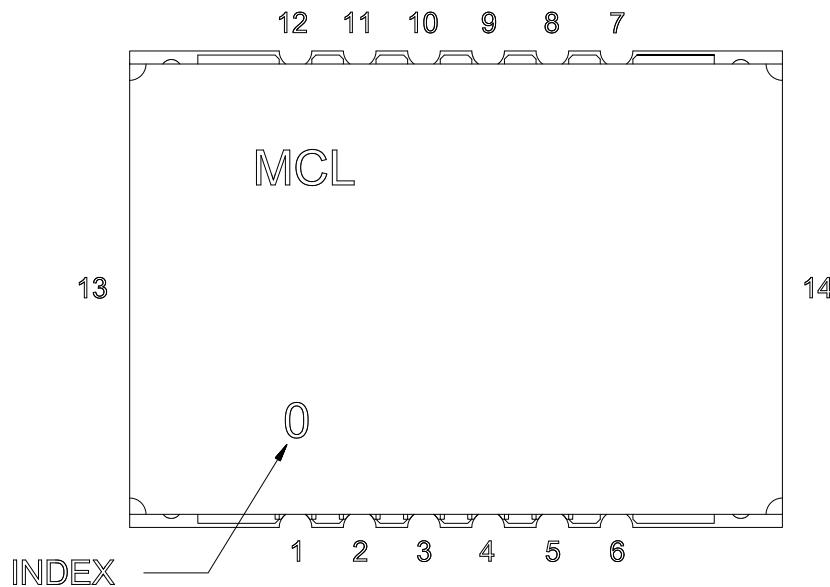


## Pin Connection

Pin Number	Function
1	VCC PLL
2	GND
3	REF IN
4	GND
5	VCC VCO
6	GND
7	RF OUT
8	GND
9	LOCK DET
10	CLOCK
11	DATA
12	LE
13	GND
14	GND

## Recommended Application Circuit

Note: REF IN and RF OUT ports are internally AC coupled.

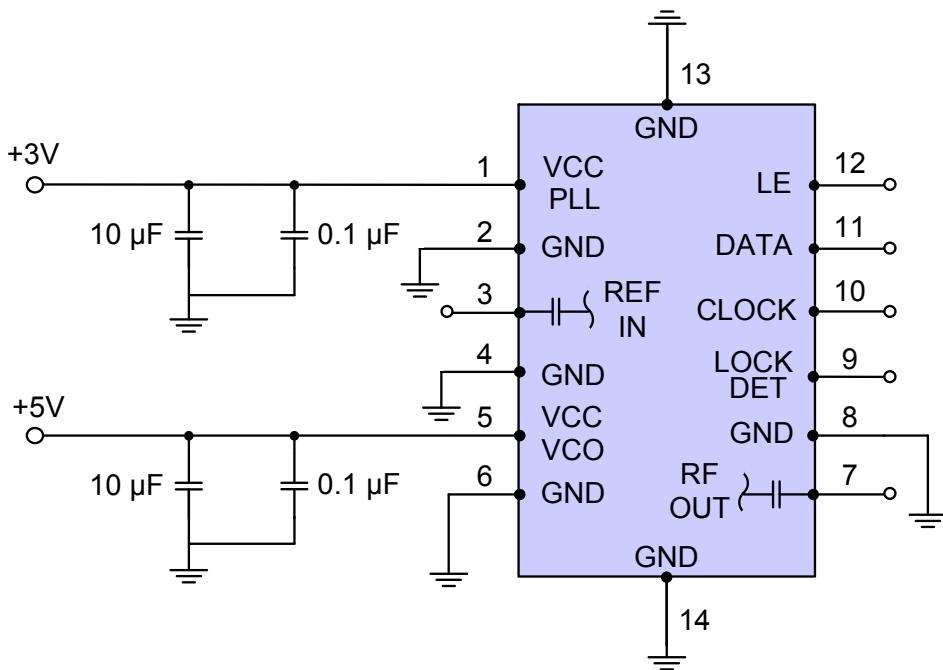

 **Mini-Circuits®**

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED  RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




**The Design Engineers Search Engine** finds the model you need, Instantly • For detailed performance specs & shopping online see

[minicircuits.com](http://minicircuits.com) 

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

## Device Marking

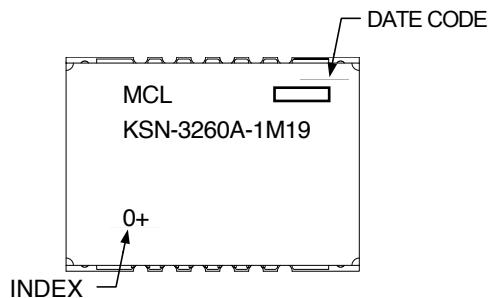

### Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

**Case Style:** DK1042

**Tape & Reel:** TR-F28

**Suggested Layout for PCB Design:** PL-249

**Evaluation Board:** TB-567-2+

**Environment Ratings:** ENV03T2



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



**The Design Engineers Search Engine** finds the model you need, Instantly • For detailed performance specs & shopping online see

[minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).