

PART NO. : WVX-2700P-300A44

◆ APPLICATION
2700MHz Systems

◆ FEATURE
> High Reliability
> **RoHS Compliant**





◆ ELECTRICAL SPECIFICATION

ITEM	SPECIFICATION
Frequency Range	2,550 ~ 2,850MHz
Operating Bandwidth	300 MHz
Insertion Loss in BW	0.9 dB Max.
Ripple in BW	0.5 dB Max.
Return Loss in BW	15.0 dB Min.
Rejection	40dB Min. @ 2,200MHz
Input Power	3 Watts Max.
In/Out Impedance	50 Ohms Nominal

◆ ENVIRONMENTAL SPECIFICATIONS

ITEM	SPECIFICATION
Operating Temperature Range	-40°C to +85°C
Dimension	See the drawing

◆ OUTLINE DRWAING

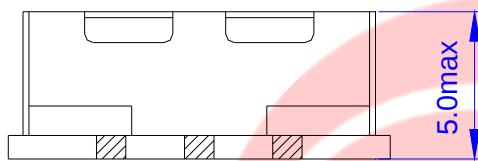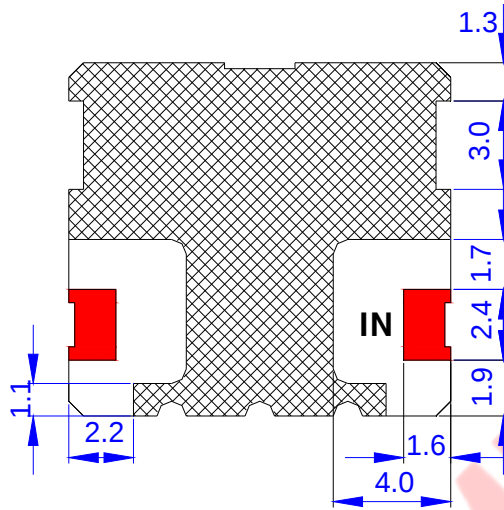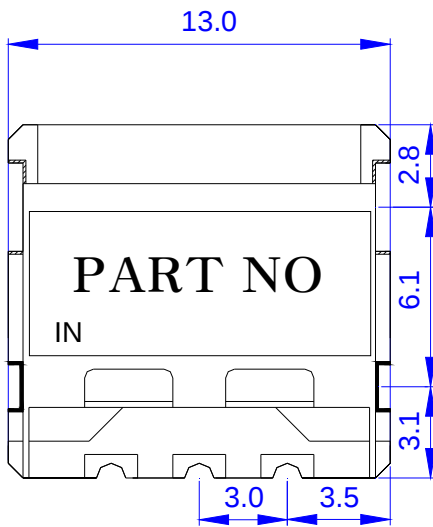

TOLERANCE
UNLESS
SPECIFIED : ± 0.2 mm