
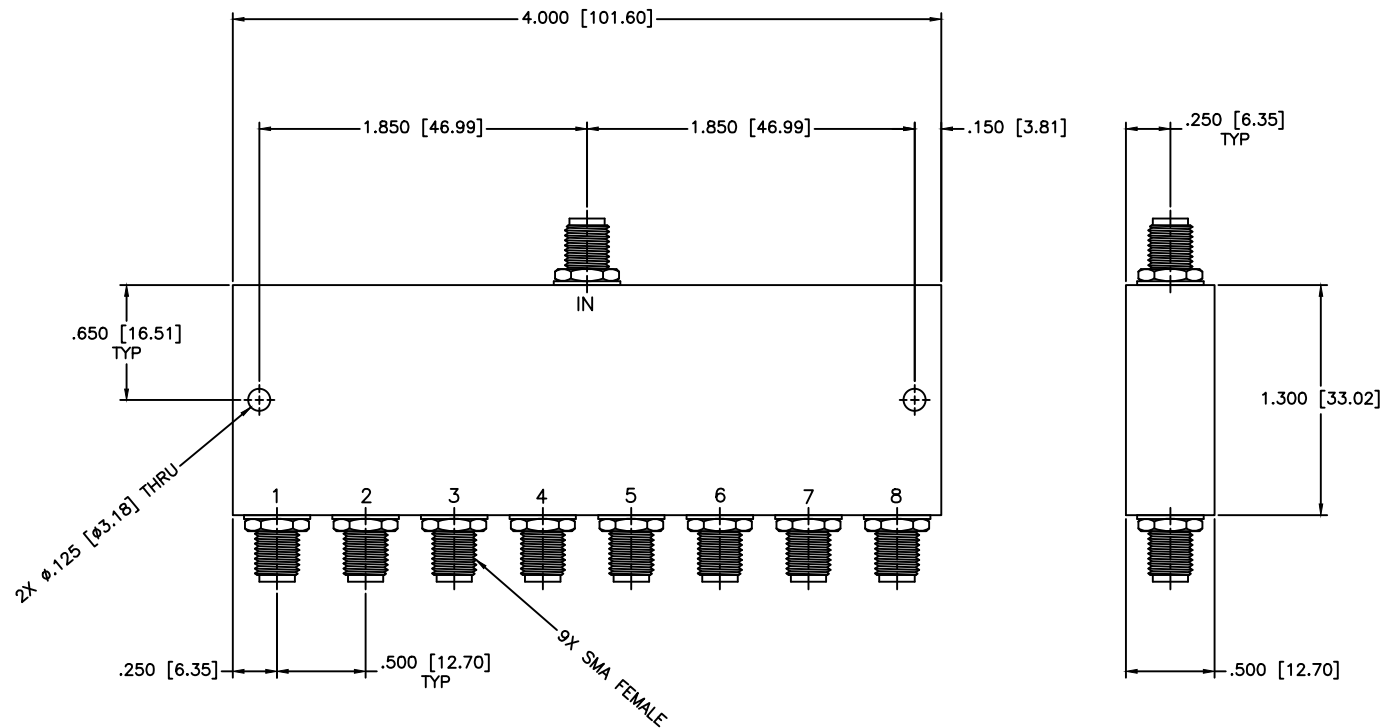


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED



SPECIFICATIONS

FREQUENCY RANGE: 50–90 MHz
 INSERTION LOSS: 1.5dB Max.
 ISOLATION: 25dB Min.
 AMPLITUDE BALANCE: ± 0.2 dB Max.
 PHASE BALANCE: ± 6 Deg. Max.
 VSWR: 1.35:1 Max.
 POWER: 1 Watt Max.

MATERIAL:		MCLI		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
						SHEET: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±0.01 ±0.005 ANGLE: ±1/2°		DRAWING TITLE: 8-WAY POWER DIVIDER			
				PART NO. PL8-18			
DRAWN: Paiboon Luekhamhan		DATE: 12-22-1997		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:	
APPROVED: T. Nguyen		DATE: 12-22-1997		THIRD ANGLE PROJECTION 		SIZE: A	
				0D2L5		REV: N/A	
						DWG NO. 82080	
						DO NOT SCALE THE DRAWING	