


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

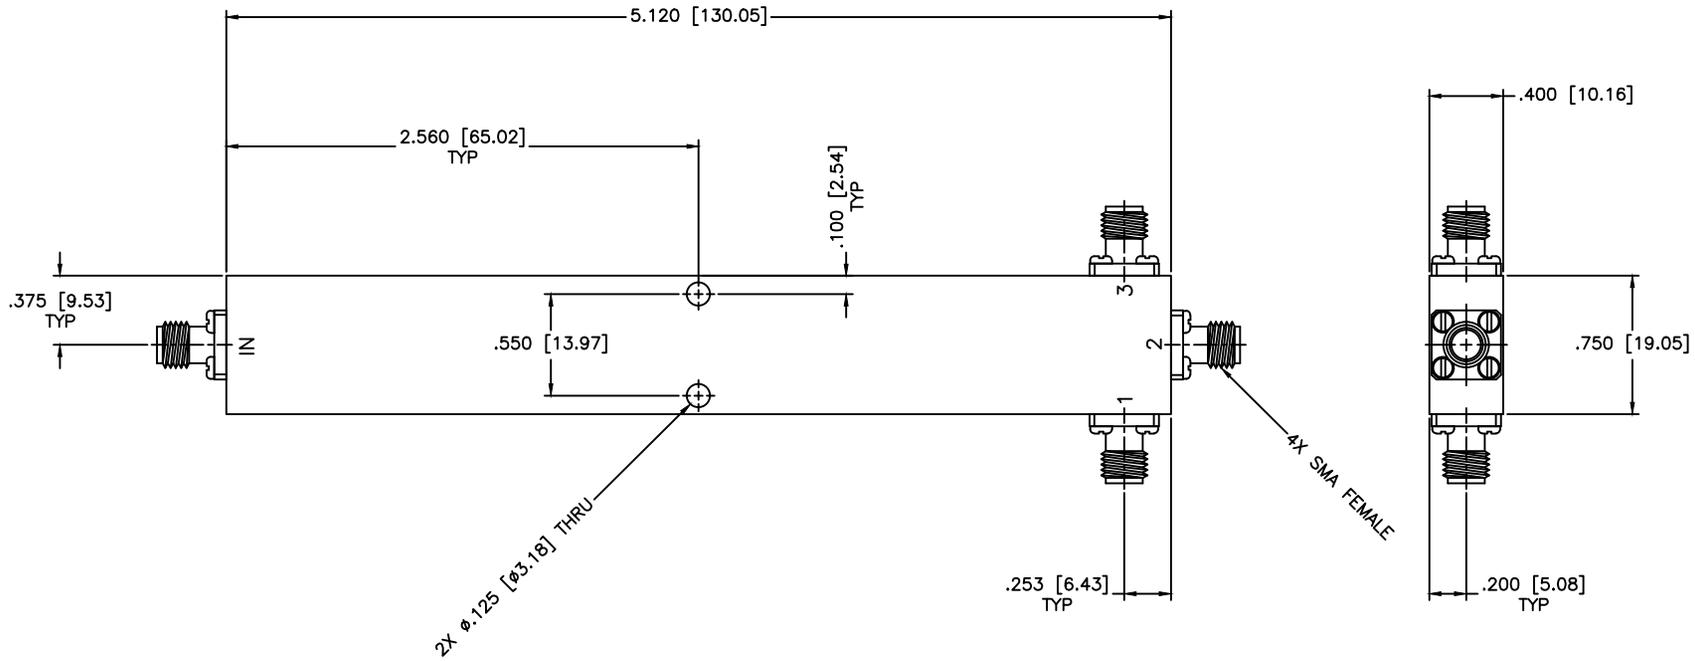

SPECIFICATIONS

Frequency Range: 0.5–4 GHz
 Insertion Loss: 2.6dB Max.
 Isolation: 15dB Min.
 Phase Balance: ±14 Deg. Max.
 Amplitude Balance: ±0.5dB Max.
 VSWR: 1.60:1 Max.
 Power: 10W (Load vswr@1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 04-10-2009
APPROVED: T. Nguyen	DATE: 09-10-2009

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 3-WAY POWER DIVIDER		SCALE: N/A
PART NO. PS3-21		CAGE CODE: OD2L5		SHEET: N/A
THIRD ANGLE PROJECTION		SIZE: A	REV: A	DWG NO. 84368
DO NOT SCALE THE DRAWING				