



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

2200 MHz Ceramic Bandpass Filter

Part Number: AM2200B1351



Electrical specifications

Center Frequency: 2200 MHz

Bandwidth: 20 MHz min

VSWR: 1.5 : 1

Input / Output Impedance: 50 Ohms

Passband: 2190-2210 MHz

Passband Insertion Loss: 4.0 dB max

Passband Ripple: 1.0 dB max

Rejection: 65 dBc min at 2000 MHz

Rejection 2: 65 dBc min at 2400 MHz

Power Handling: 1 Watt

Mechanical

Mounting Method: SMT

Dimensions: 13 x 12 x 5.5 mm


Environmental

Operating Temperature: -40°C to 85°C

Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

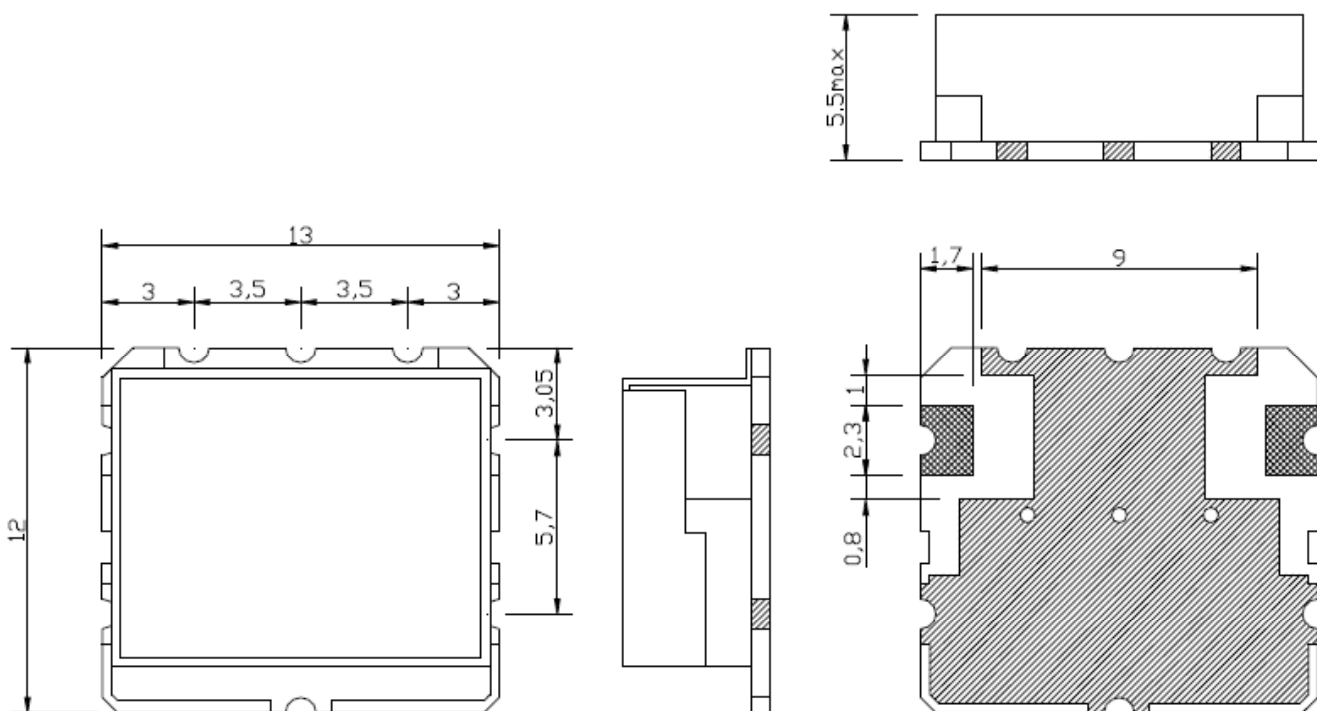

UNIT:mm

TOLERANCE:±0.3