


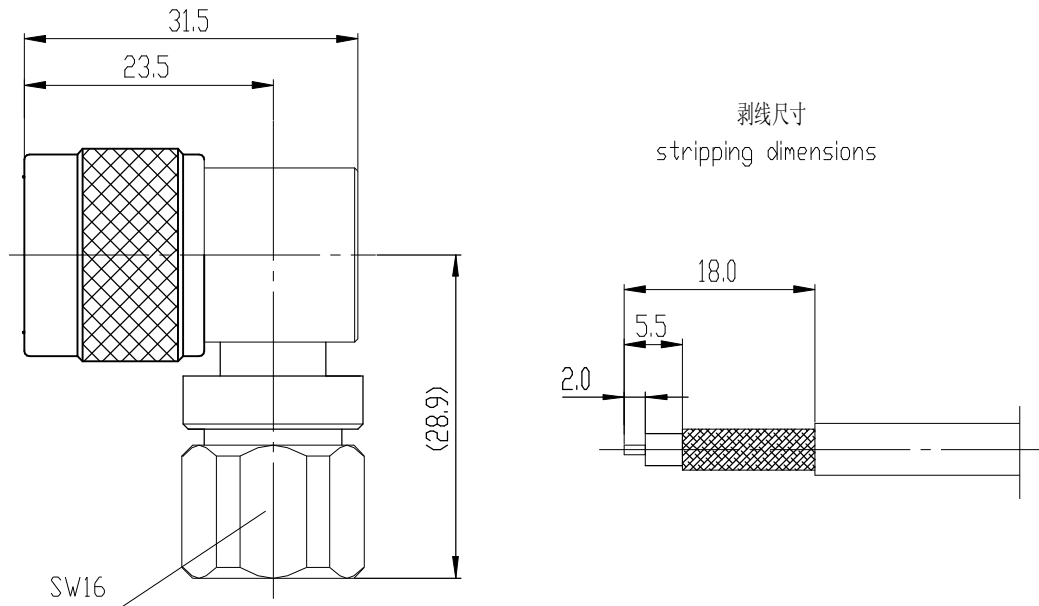

产品型号 type	电缆型号 cable type
N-JW7A	SYV-50-7-1、RG8/U、RG213/U

Electrical Characteristics:

- Characteristic Impedance: $50\ \Omega$
 - Frequency range: DC~6Ghz
 - Contact resistance
Center conductor: $\leq 1.0\ m\ \Omega$
Out conductor: $\leq 0.2\ m\ \Omega$
 - Insulation resistance: $\geq 5000M\ \Omega$
 - Insulator withstanding: 1500V
 - VSWR: ≤ 1.5
 - Durability: 500cycles
- Application: MIL-C-39012/1E

Material&Finishing

- Center contact :
Male: brass, gold plated
- Insulators: PTFE
- Crimp ferrule: copper, nickel plated
- Gasket: silicone rubber


主要性能指标:

- 特性阻抗: $50\ \Omega$
- 频率范围: DC-6Ghz
- 接触电阻:
中心导体: $\leq 1.0\ m\ \Omega$
外导体: $\leq 0.2\ m\ \Omega$
- 绝缘电阻: $\geq 5000M\ \Omega$
- 介质耐压: 1500V
- 电压驻波比: ≤ 1.5
- 插拔次数: 500次

执行标准: MIL-C-39012/1E

材料和镀层

- 中心接触件:
插针: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯
- 线夹: 黄铜, 镀镍
- 密封圈: 硅橡胶

		SCALE	N-JW7A RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		1.5:1		
	NAME	DATE	西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	
DRAWN				
CHECKED				
APPROVED				