

ADAPTERS, BETWEEN-SERIES DC - 7.5 GHz QUICK CONNECT 7/16 TO TYPE N

api 
technologies corp.
> INMET

MODELS: 5706Q; 5707Q


SPECIFICATIONS:

Electrical:

Frequency Range _____ DC – 7.5 GHz
VSWR:
DC To 2GHz _____ 1.20:1 Maximum
2 To 7.5GHz _____ 1.35:1 Maximum
Impedance _____ 50 Ohms
Operating Temp Range _____ -65°C to +85°C


Mechanical:

Connectors _____ White Bronze Plated Brass
(Mates with MIL-STD-348)
Conductors _____ Gold Plated Beryllium Copper
Coupling Nuts
7/16 Male _____ White Bronze Plated Brass
Type N Male _____ Passivated Stainless Steel

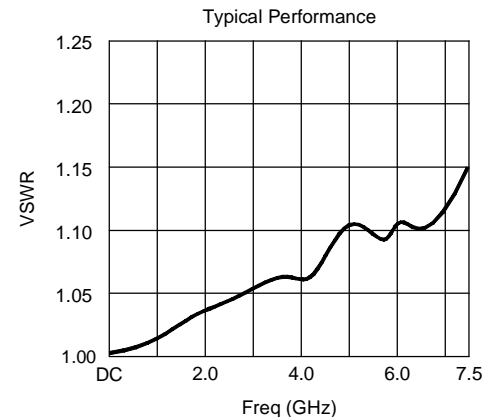


Model Number: **5706Q**
DIN-7/16 Male To Type N Female

QUICK CONNECT
COUPLING NUT

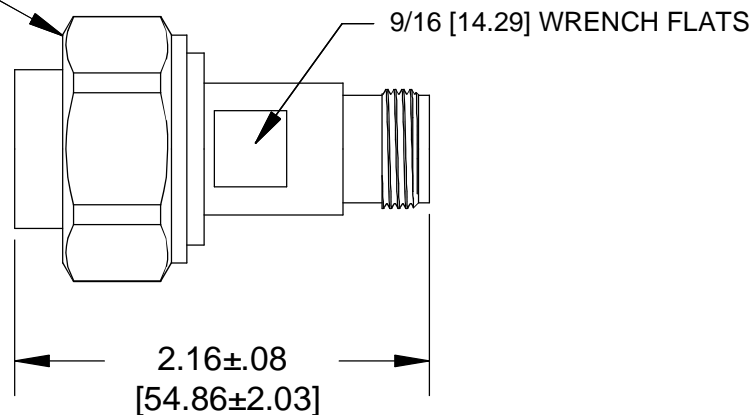

Model Number: **5707Q**
DIN-7/16 Male To Type N Male

QUICK CONNECT
COUPLING NUT

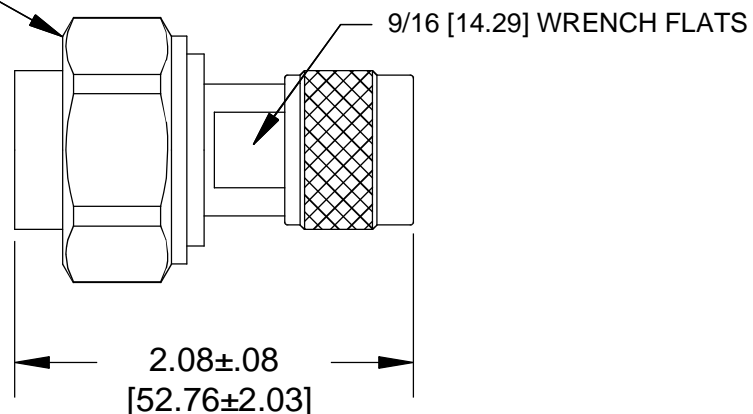

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.

5706Q; REV B

300 Dino Drive • Ann Arbor, MI 48103-9457 U.S.A. • 888-244-6638 or 734-426-5553 • FAX 734-426-5557 • inmet.apitech.com