


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

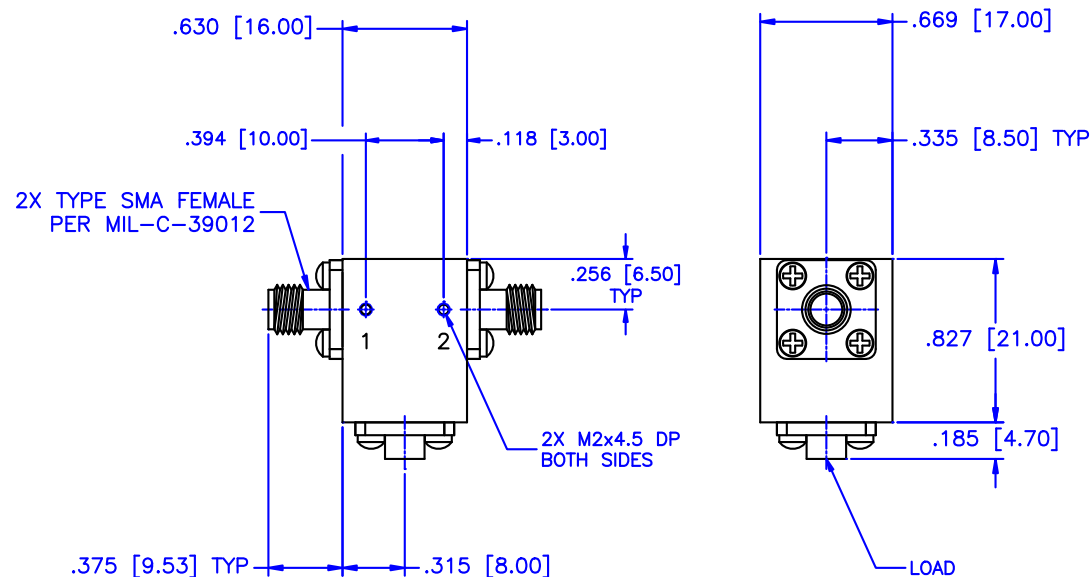


SPECIFICATIONS:

Frequency Range: 6 to 12 GHz

Isolation: 17dB Min.

Insertion loss: 0.70dB Max.

VSWR: 1.40:1 Max.

MATERIAL: 		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan DATE: 07-01-2008		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01$ $\pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL ISOLATOR	
				PART NO. IS-24-1	
APPROVED: T. Nguyen DATE: 07-01-2008		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION 		CAGE CODE: 0D2L5	SIZE: A REV: N/A DO NOT SCALE THE DRAWING
				DWG NO. 84025	