


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

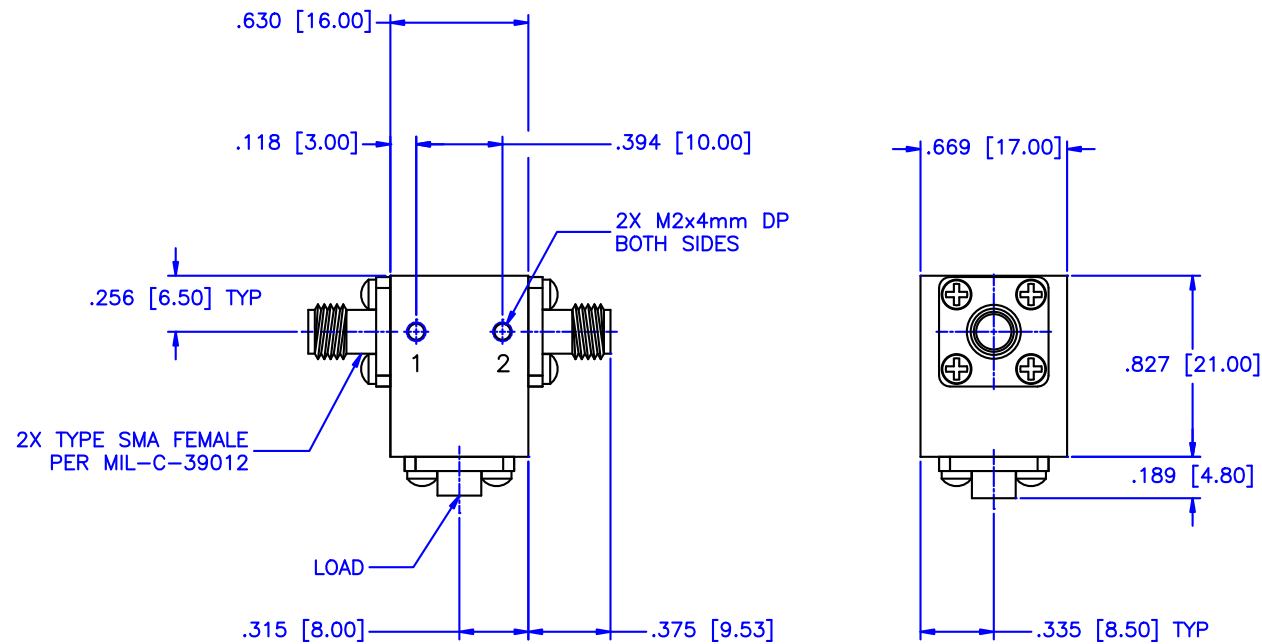

SPECIFICATIONS:

Frequency Range: 7.8–18.0 GHz
 Isolation: 14dB Min.
 Insertion loss: 1.0dB Max.
 VSWR: 1.50:1 Max.
 Input Power: 1 Watt Max.
 Operating Temperature: 0°C to +60°C
 Storage Temperature: –30°C to +60°C

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan DATE: 12-24-2008		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL ISOLATOR	
				PART NO. IS-65-1	
APPROVED: T. Nguyen DATE: 12-24-2008		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION		CAGE CODE: OD2L5	SIZE: N/A
				REV: N/A	DWG NO. 84041
DO NOT SCALE THE DRAWING					