


Uncontrolled Drawing

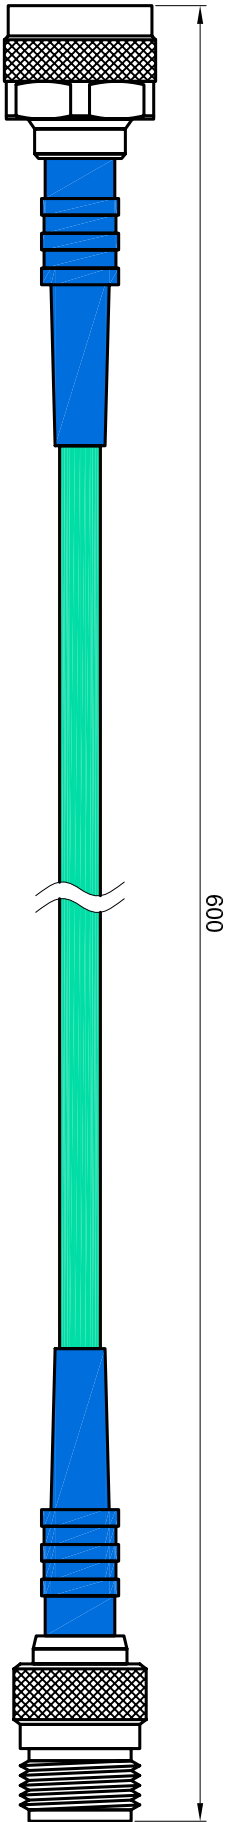

Type N male

Type N female

Specification:

- 1. Model: MC06-03-04-600
- 2. Nominal Impedance: 50Ω
- 3. Frequency Range: DC-6GHz, up to 8GHz
- 4. Insertion Loss: $0.60\text{dB}@DC-1\text{GHz}$, $0.90\text{dB}@1-3\text{GHz}$, $1.30\text{dB}@3-6\text{GHz}$, $1.45\text{dB}@6-8\text{GHz}$
- 5. VSWR: $1.15@DC-1\text{GHz}$, $1.20@1-3\text{GHz}$, $1.25@3-6\text{GHz}$, $1.30@6-8\text{GHz}$
- 6. Length: 0.6m
- 7. Connector: N male to N female
- 8. Power CW: $166\text{W}@6\text{GHz}$

参 考 号	修 改	制 图 / 校 核、 审 核、 材 料 检 查 表		图 号	505.0323
设 计	DESIGNED_ZYY.SHJ	校 对	CHECKED_ZH	审 核 - 日 期	APPROVED_
BXT Technologies		Test Cable Assembly		文 件 名	FILENAME
RF Technologies		www.bxt-technologies.cn		日 期	10/12/7
Tel:0591-83789500		MC06-03-04-600		版 本	EDITION
				图 纸	SHEET