


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

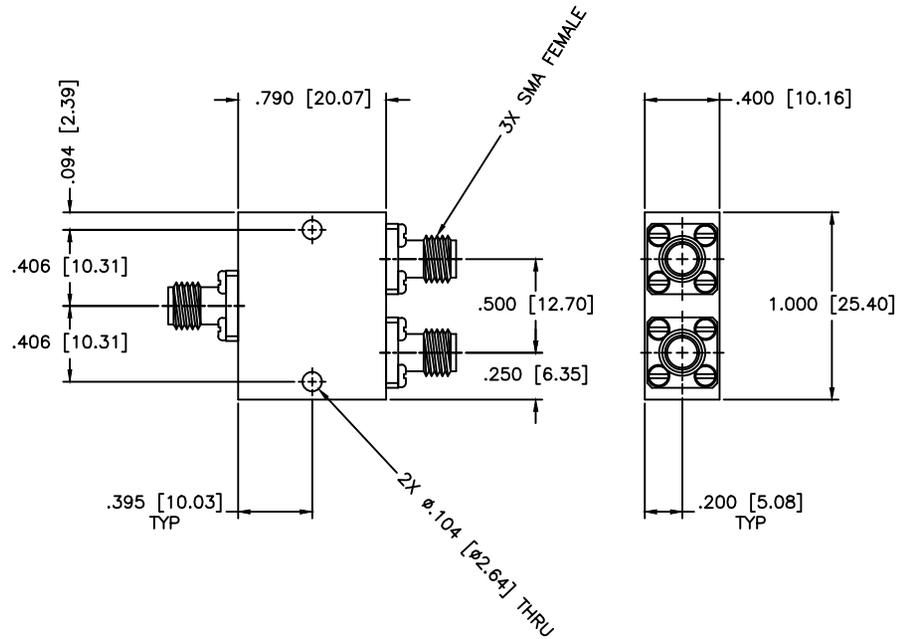

SPECIFICATIONS

Frequency Range: 17.3–18.1 GHz
 Isolation: 15dB Min.
 VSWR In/Out: 1.80/1.70:1 Max.
 Insertion Loss: 1.3dB Max.
 Amplitude Balance: ±0.4dB Max.
 Phase Balance: ±7 Deg. Max.
 Power: 20W (Load vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:		SHEET:	
DRAWN:		DATE:		PART NO.		PS2-121
Paiboon Luekhamhan		04-12-1999		CAGE CODE:		
APPROVED:		DATE:		SIZE:	REV:	DWG. NO.
T. Nguyen		04-12-1999		N/A	N/A	DO NOT SCALE THE DRAWING
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		OD2L5		