


剥线尺寸
stripping dimensions

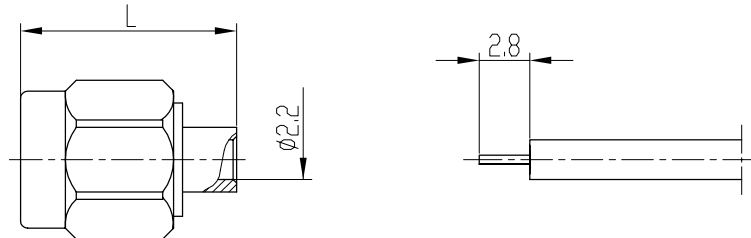

产品型号 type	电缆型号 cable type	L	D	备注 remark
SMA-JB2	SFT-50-2-1、RG405/U	11.5	Ø2.2	
SMA-JB2N				壳体：黄铜，镀镍 bodies: nickel plated
SMA-JB2G				壳体：不锈钢，钝化 bodies: stainless steel, passivation
SMA-JB3	SFT-50-3-1、RG402/U	11.0	Ø3.6	
SMA-JB3G		11.0		壳体：不锈钢，钝化 bodies: stainless steel, passivation
SMA-JB3G1		13.5		

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~18Ghz
- Contact resistance
Center conductor: ≤3.0 mΩ
Out conductor: ≤2.0 mΩ
- Insulation resistance: ≥5000MΩ
- Insulator withstanding: 1000V
- VSWR: ≤1.35
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~18Ghz
- 接触电阻:
中心导体: ≤3.0 mΩ
外导体: ≤2.0 mΩ
- 绝缘电阻: ≥5000MΩ
- 介质耐压: 1000V
- 电压驻波比: ≤1.35
- 插拔次数: 500次

Application: MIL-C-39012/55D

执行标准: MIL-C-39012/55D

Material&Finishing

- Center contact :
Male: brass, gold plated
- Body: brass, gold plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
插针: 黄铜，镀金
- 壳体: 黄铜，镀金
- 绝缘子: 聚四氟乙烯

 	SCALE		SMA-JB2 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE <table border="1"> <thead> <tr> <th>FRACTIONS</th> <th>DECIMALS</th> <th>ANGLES</th> </tr> </thead> <tbody> <tr> <td>.X±</td> <td>.15</td> <td>±1°</td> </tr> <tr> <td>.XX±</td> <td>.05</td> <td></td> </tr> <tr> <td>.XXX±</td> <td></td> <td></td> </tr> </tbody> </table>	FRACTIONS	DECIMALS	ANGLES	.X±	.15	±1°	.XX±	.05		.XXX±		
	FRACTIONS	DECIMALS			ANGLES											
.X±	.15	±1°														
.XX±	.05															
.XXX±																
NAME	DATE															
DRAWN																
CHECKED																
APPROVED																

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.