


180deg Hybrid Coupler



Features

- 1. 0.7-40GHz Ultra-wide Operating Frequency Band Coverage
- 2. Low VSWR, High Isolation,
- 4. Good Phase Balance

OutlineDrawing Unit: mm

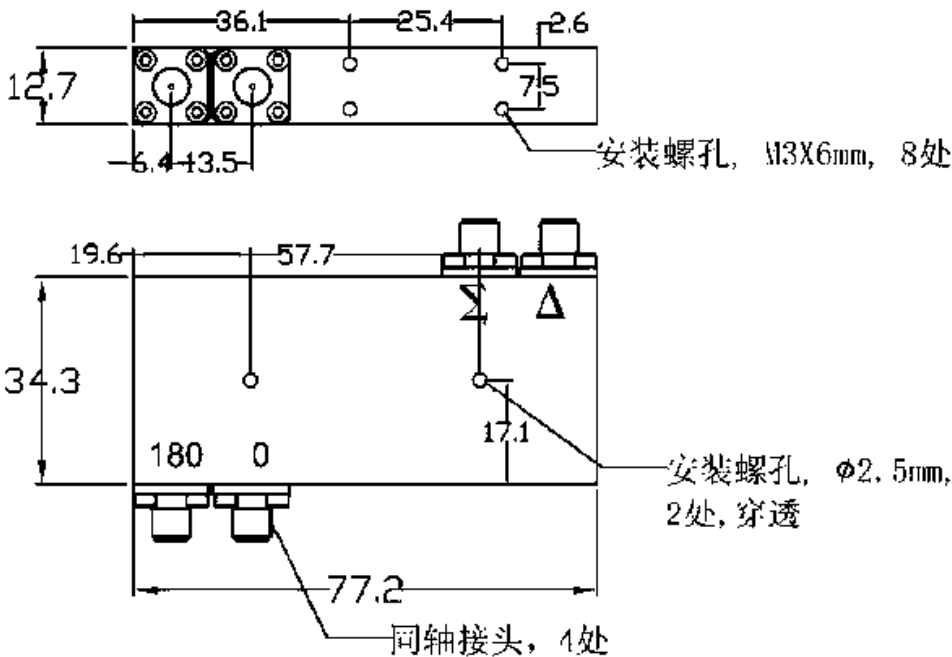

Elec. Spec. "50 Ω "

[Inquiry](#)

Freq. Range (GHz)	2 ~ 18
Insertion Loss (dB) Max	2.8
Isolator (dB) Min	16
VSWR Max	1.6
Amp. Bal. (dB) Max	± 0.6
Phase Bal. (dB) Max	± 9.0
CW Power (W) Max	20
Peak Power(KW) Max	3
Connector	SMA-Female
Operating Temp.($^{\circ}$ C)	-40~+70
Storage Temp.($^{\circ}$ C)	-55~+85
Weight (g) Max	110