
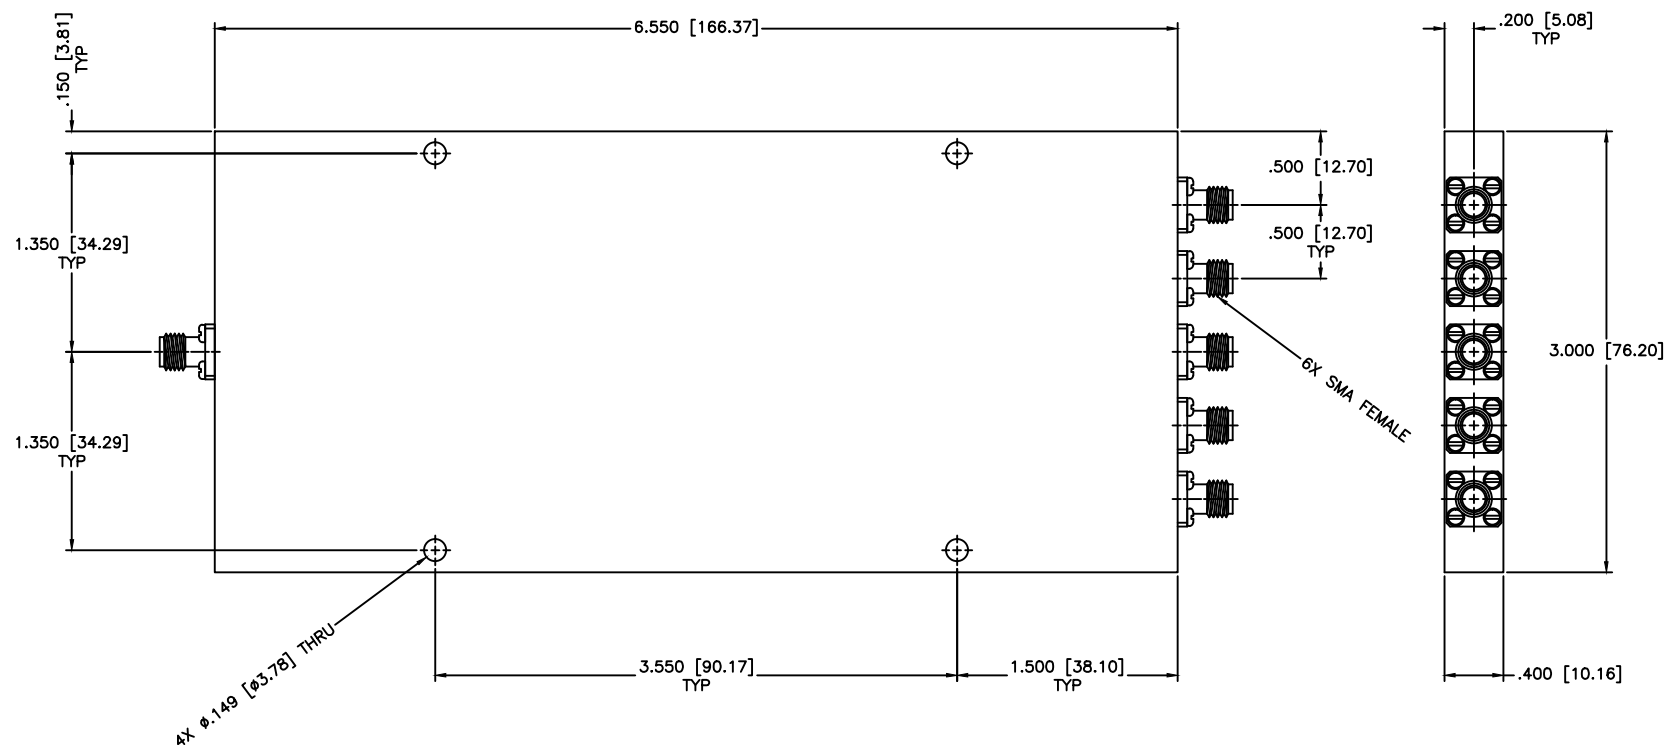


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED



SPECIFICATIONS

Frequency Range: 2–4 GHz
 Insertion Loss: 1.9dB Max.
 Isolation: 14dB Min.
 VSWR: 1.75:1 Max.
 Amplitude Balance: ± 1.2 dB Max.
 Input Power: 10W (Load vswr @ 1.2)

MATERIAL:  MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 5-WAY POWER DIVIDER	
		PART NO. PS5-5	
DRAWN: Paiboon Luekhamhan	DATE: 03-21-1998	CAGE CODE: OD2L5	
APPROVED: T. Nguyen	DATE: 03-21-1998		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		SIZE: N/A	REV: N/A
		DWG NO. 81010	
THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING	