


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

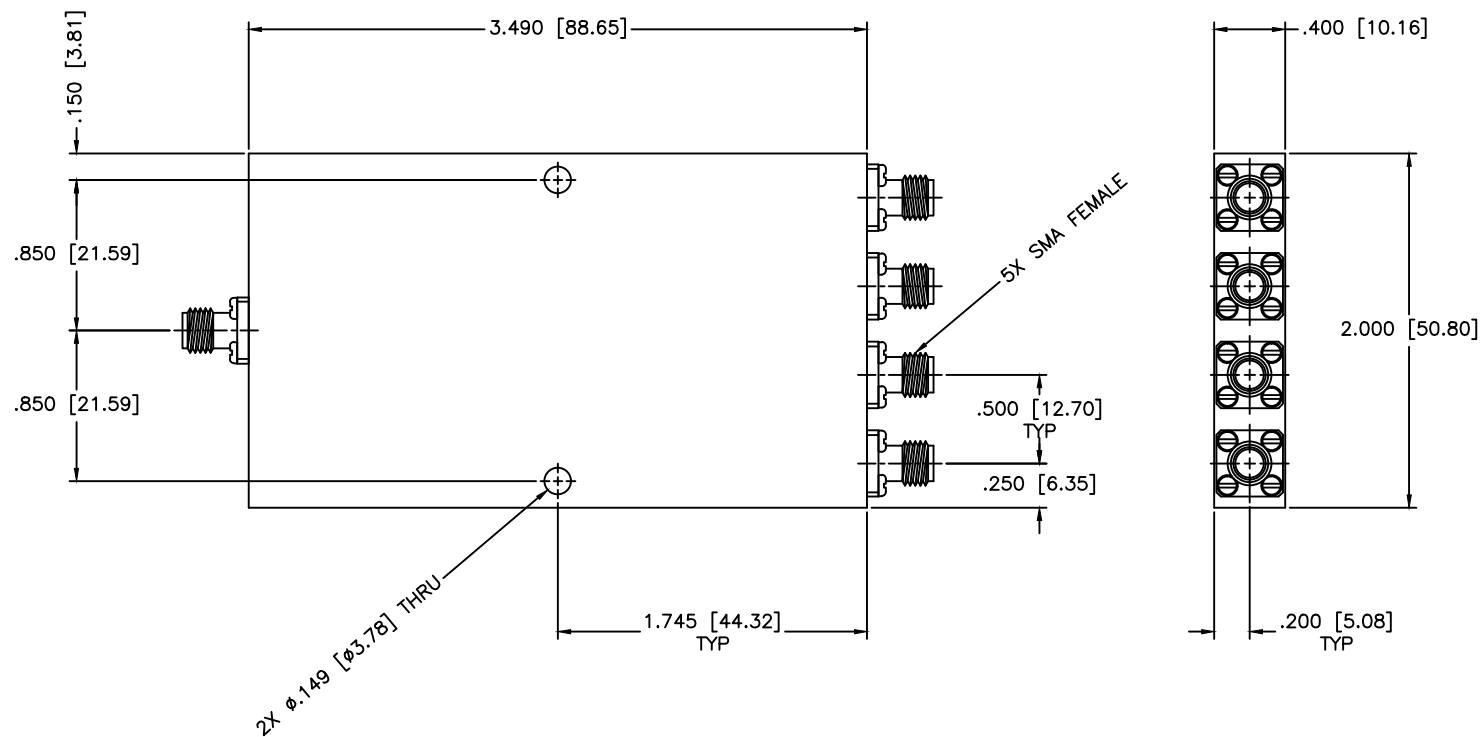

SPECIFICATIONS

Frequency Range: 2–5 GHz
Insertion Loss: 0.9dB Max.
Isolation: 16dB Min.
VSWR In/Out: 1.50:1/1.40:1 Max.
Phase Balance: ± 2 Deg. Max.
Amplitude Balance: 0.4dB Max.
Power: 30W (Load vswr@1.2)

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET:	N/A
DRAWN: Paiboon Luekhamhan		DATE: 06-29-1999		DRAWING TITLE: 4-WAY POWER DIVIDER	
APPROVED: T. Nguyen		DATE: 06-29-1999		PART NO. PS4-50	
		CAGE CODE: OD2L5		SIZE: A	REV: N/A
				DO NOT SCALE THE DRAWING	
				DWG NO. 81336	