



ULTRA WIDE BAND 1.3-1.8GHz Coaxial Circulator RFLC202M13G18S

1.0	Mechanical Specifications	
1.1	Coaxial Connector	SMA-F
1.2	External Body Finish	Nickle Plated
1.3	Rotation	Clockwise / Counter-clockwise

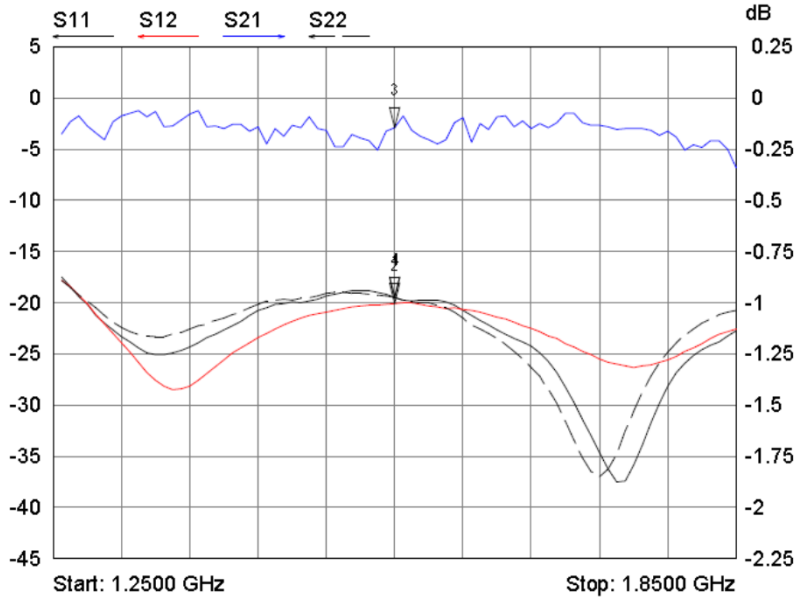

2.0	Environment specifications	
2.1	Opt. Temp.	-20°C~+70°C
2.2	Storage Temp.	-40°C~+85°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

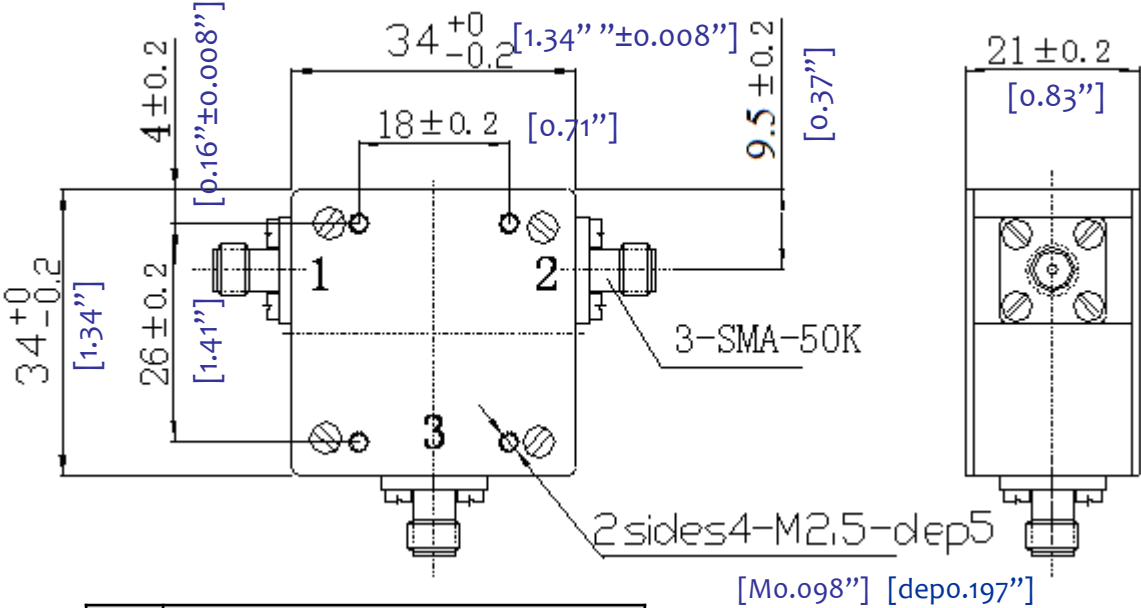

PN	Frequency (GHz)	Insertion loss (dB)	Isolation (dB) min	VSWR (max)	Average Power(CW)
RFLC202M13G18S	1.3~1.8	0.5	17	1.4	50

PAGE 1 OF 1	DATE JAN 8 th 2003
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY.	DESIGN RFFC RF-LAMBDA RFFC CAD MODEL REVISION 02-1 ASSEMBLY REVISION VS23 ASSEMBLY NAME RFLVR54 DRAWING NUMBER D02-12
 RFLC202M13G18S ULTRA WIDE BAND Coaxial Circulator	
www.rflambda.com	
RF-LAMBDA	SIZE LT SHEETS 1 OF 1