

Helping Customers Innovate, Improve & Grow


TX-508
Features

- Low G-Sensitivity
- Vibration hardened
- Tight Tolerances
- Low Phase Noise
- Frequency Range¹: 10 - 100 MHz

Applications

- Vibration Environment
- Portable Equipment
- Land Mobile Radio


Performance Specifications²

Frequency Stabilities ¹ (Standard)						
Parameter	Min	Typical	Max	Units	Condition	
vs. operating temperature range (referenced to +25°C)	-1.0		+1.0	ppm	-40 to +85°C	Options ⁴
	-1.0		+1.0	ppm	-20 to +70°C	
	-0.5		+0.5	ppm	-0 to +50°C	
Initial tolerance	-1.5		+1.5	ppm	at time of shipment, nominal EFC, 25°C V _s ±5% static Load ±10% static after 30 days of operation after 30 days of operation	
vs. supply voltage change	-0.3		+0.3	ppm		
vs. load change	-0.2		+0.2	ppm		
vs. aging / 1 year	-1.0		+1.0	ppm		
vs. aging / 10 year	-2.5		+2.5	ppm		
Frequency Stabilities ¹ (Stratum 3 TCXO Frequency range - 10 to 100 MHz)						
vs. operating temperature range (referenced to +25°C)	-0.8		+0.8	ppm	-40 to +85°C	Options ⁴
	-0.8		+0.8	ppm	-20 to +70°C	
	-0.28*		+0.28*	ppm	-20 to +70°C	
	-0.28*		+0.28*	ppm	-0 to +50°C	
Initial tolerance	-1.0		+1.0	ppm	at time of shipment, nominal EFC, 25°C V _s ±5% static Load ±10% static after 30 days of operation Note: * Stratum 3 per GR-1244-CORE: <±4.6 ppm for all causes and 20 Years aging, Holdover: <±0.37 ppm over 24 hours	
vs. supply voltage change	-0.3		+0.3	ppm		
vs. load change	-0.1		+0.1	ppm		
vs. aging / 20 years	-2.5		+2.5	ppm		
overall tolerance	-4.6		+4.6	ppm		

Performance Specifications²

Supply Voltage (Vs)						
Parameter	Min	Typical	Max	Units	Condition	
Supply voltage (standard)	3.135	3.3	3.465	VDC	@LVCMOS	Option ⁴
Current consumption			30	mA		
Supply voltage	4.75	5.0	5.25	VDC	@HCMOS	
Current consumption			40	mA		
RF Output						
Signal [standard]	LVCMOS/HCMOS					
Load	13.5	15	16.5	pF		
Signal Level (Vol) LVCMOS			0.3	VDC	@ Vs=3.3V and 15pF Load	
Signal Level (Voh) LVCMOS	3.0			VDC	@ Vs=3.3V and 15pF Load	
Signal Level (Vol) HCMOS			0.5	VDC	@ Vs=5.0V and 15pF Load	
Signal Level (Voh) HCMOS	4.5				@ Vs=5.0V and 15pF Load	
Duty Cycle	40		60	%	@ (Voh-Vol)/2	
Rise and Fall time			5	ns	@15 pF 10 to 90 %	
Frequency Control (EFC)						
Tuning Range	Fixed TCXO; No adjust					Option ⁴
Tuning Range	±5.0 ±8.0	±12 ±14	±20 ±20	ppm ppm	S3 Version Standard Version	
Linearity	<10%					
Tuning Slope	Positive					
Control Voltage Range	0.3	1.65	3.0	VDC	@ Vs=3.3V	
Control Voltage Range	0.5	2.5	4.5	VDC	@ Vs=5.0V	
Frequency control input impedance	10			kOhm		
Additional Parameters						
Phase Noise ³		-95 -123 -143 -152 -155		dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz	10 Hz 100 Hz 1 kHz 10 kHz 100 kHz	@ 10 MHz LVCMOS 3.3 V
Jitter		1.14		ps RMS	@ 12 kHz to 20 MHz	
Phase Noise ³		-74 -103 -134 -152 -160		dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz	10 Hz 100 Hz 1 kHz 10 kHz 100 kHz	@ 100 MHz LVCMOS 3.3 V
Jitter		0.073		ps RMS	@ 12 kHz to 20 MHz	
Weight			8.0	g		
Reflow Process	IPC / JEDEC J-STD-020 (latest version)					
Additional Environmental Conditions						
Random Vibration	MIL-STD-202G; Method 214A; Condition II-J, 1g2/Hz / 43.92 grms guaranteed (Qualification testing performed at MIL-STD-202G; Method 214A; Condition II-K, 1.5g2/Hz / 53.79 grms)					
Sine Vibration	MIL-STD-883; Method 2007, Test Condition B 50 g (Qualification testing performed at MIL-STD-883; Method 2007; Test Condition C 70 g)					
Shock	MIL-STD-883G; Method 2002.4; Condition D, 5000 g / 0.3 ms higher values on request					
Solderability	JEDEC J-STD-002: 100% RoHS 6 compliant					
Solvent Resistance	non-washable device					
Absolute Maximum Ratings						
supply voltage (Vs)			6.0	V		
Output Load			50	pF		
Operable Temperature Range	-40		+85	°C		
Storage Temperature Range	-55		+105	°C		

Outline Drawing / Enclosure

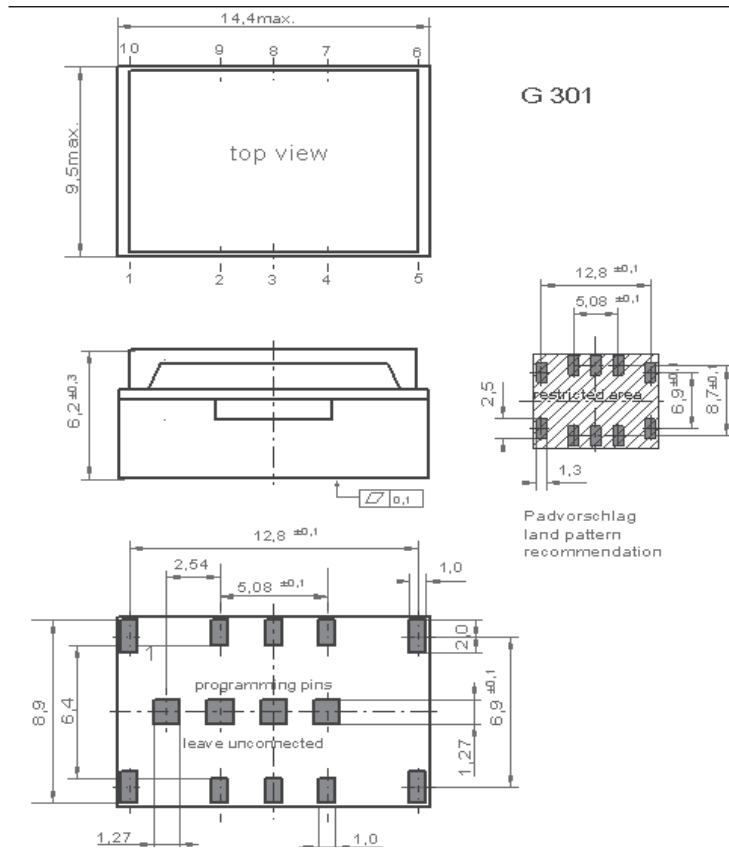

Dimensions in mm

Pin Connections:

1	N/C
2	NC / Control Voltage Input (Vc)
3	N/C / Enable (optional)
4	Ground (Case)
5	NC
6	NC
7	RF-Output
8	NC
9	Supply Voltage (Vs)
10	NC


Enable (Option*):

Pin 3	Pin 7
High	Data
Open	Date
Low	High Tristate


Package Code: 508

Type	Height
G301	6.2 mm


Typical Phase Noise @ 100 MHz HCMOS

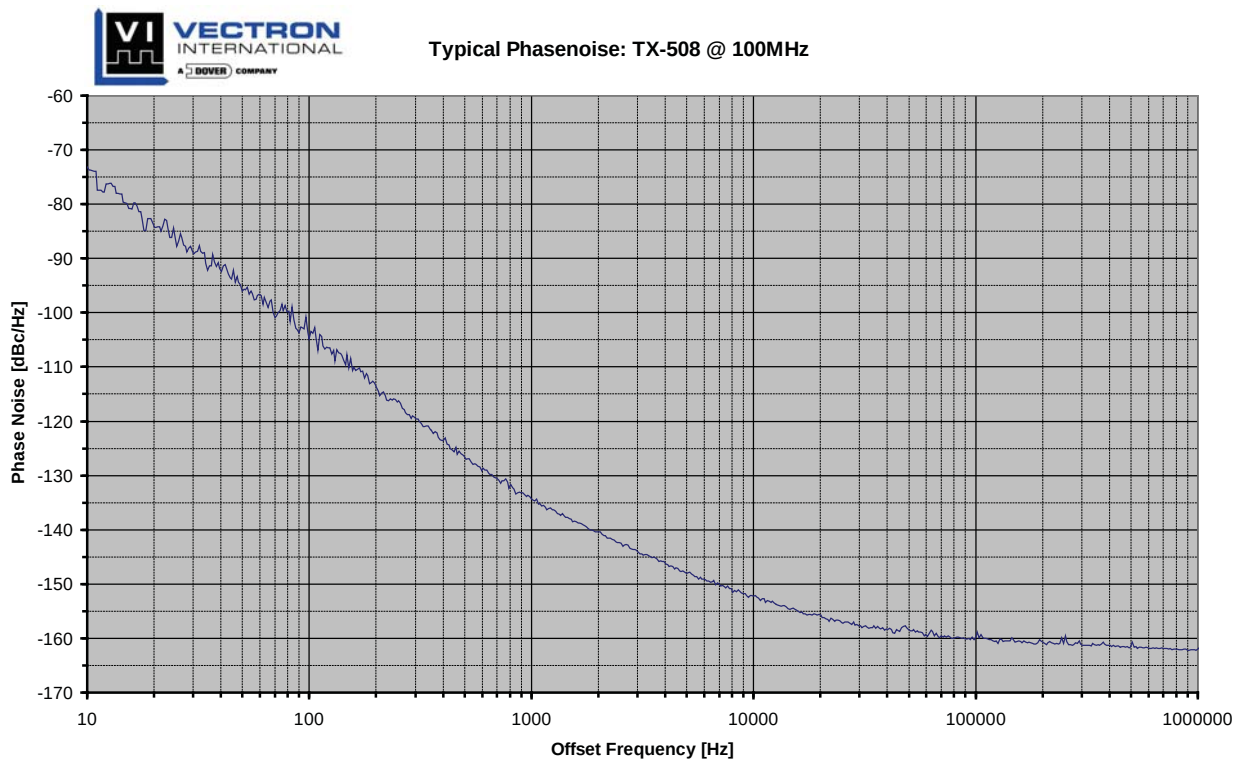


G-Sensitivity: TX-508; 10 MHz; 0,06g2/Hz

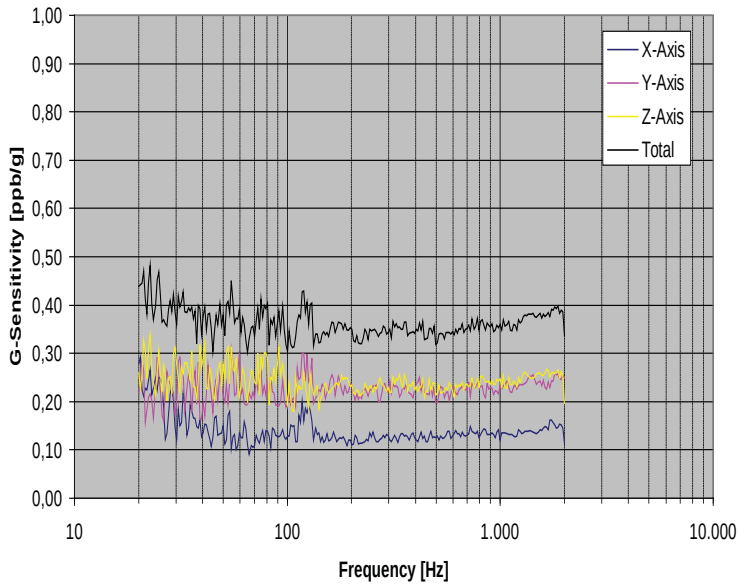

Vibration spectrum

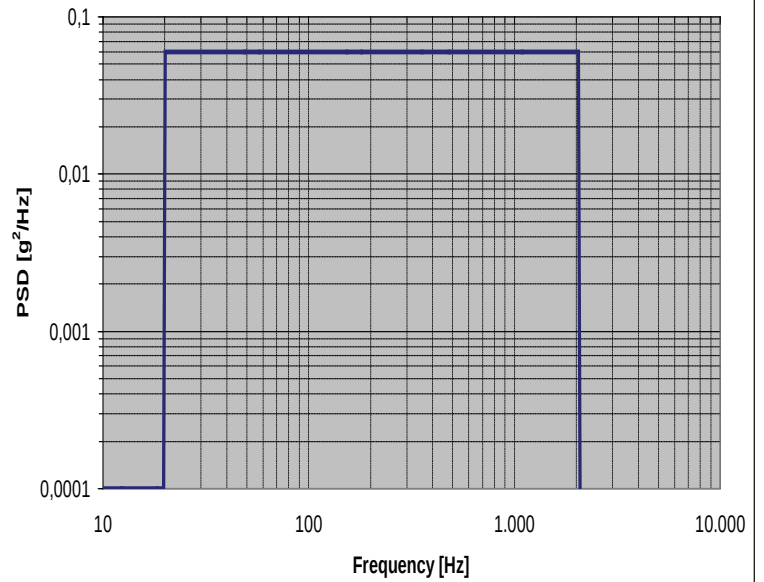


Phase noise: TX-508; 10 MHz; 0,06g2/Hz

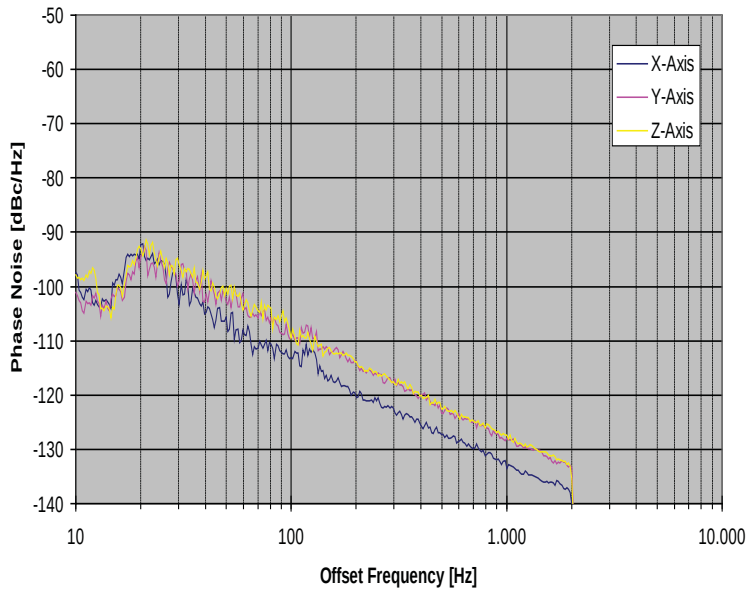


Calculation equation according to Vig-Tutorial

$$g\text{-sensitivity: } G = \frac{2 \cdot f_v}{A_{peak} \cdot f_0} \cdot 10^{\frac{L(f_v)}{20}}$$

$$\text{Peak g-level: } A_{peak} = \sqrt{PSD \cdot 2}$$




Standard Shipping Method (TX-508)

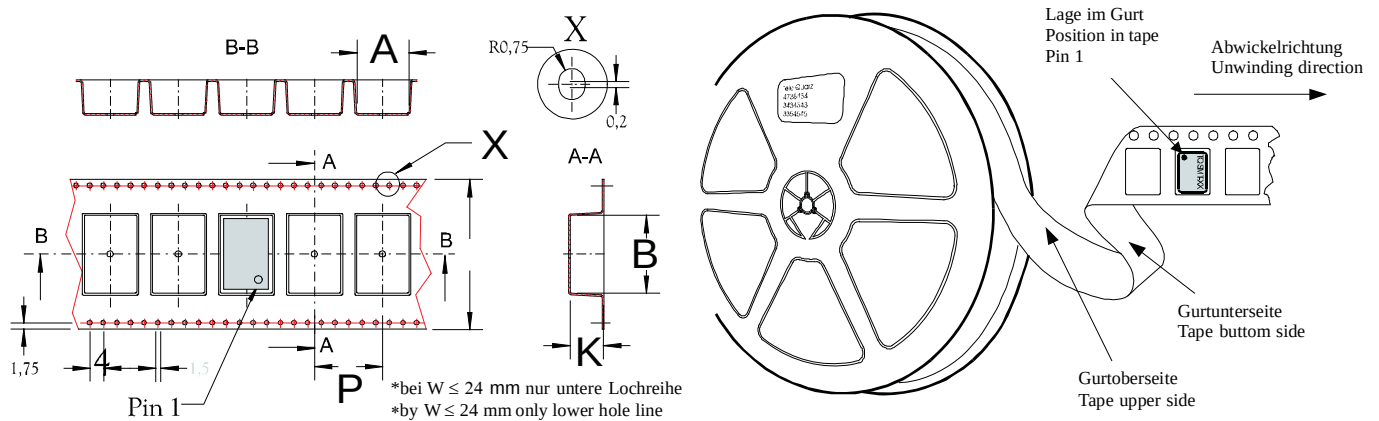

Enclosure Type	Tape Width W (mm)	Quantity per meter	Quantity per reel	Dimension P
G301	24	83,3	850	12

Ordering Information

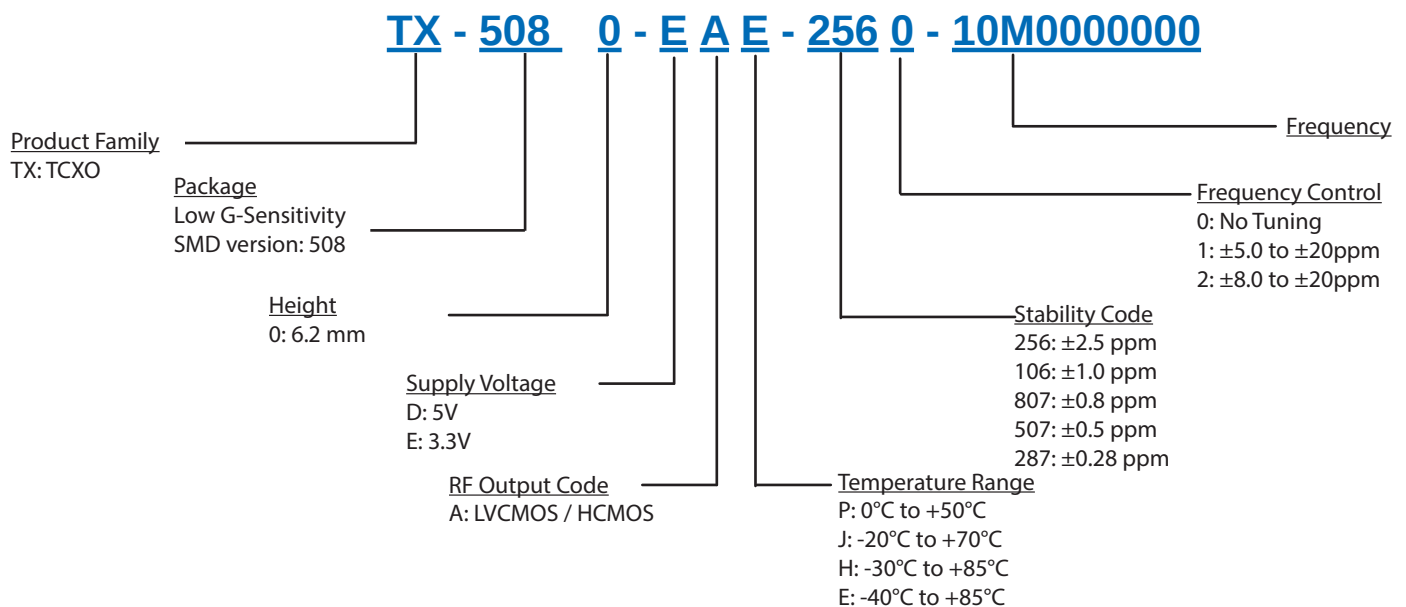

Notes:

- Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
 - Unless other stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
 - Phase noise degrades with increasing output frequency.
 - Contact factory for availability.
- Subject to technical modification.

For Additional Information, Please Contact

USA:

Vectron International
267 Lowell Road, Suite 102
Hudson, NH 03051
Tel: 1.888.328.7661
Fax: 1.888.329.8328

Europe:

Vectron International
Landstrasse, D-74924
Neckarbischofsheim, Germany
Tel: +49 (0) 7268.801.100
Fax: +49 (0) 7268.801.282

Asia:

Vectron International
68 Yin Cheng Road(C), 22nd Floor
One LuJiaZui
Pudong, Shanghai 200120, China
Tel: +86 21 6194 6886
Fax: +86 21 6194 6699

Disclaimer

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Rev: 02/2014