

TECHNICAL DATA SHEET

PE9384

SMA Male
50 Ohms
MIL-STD-348
TNC Female
50 Ohms
MIL-STD-348
Standard
Straight
4 Hole Flange

1.03 [26.16]
0.688 [17.48]
0.688 [17.48]

SMA Male
Beryllium Copper, Gold
MIL-G-45204, Type II, Class 2
Passivated Stainless Steel
QQ-P-35
5/16
8 [0.9]
Passivated Stainless Steel
QQ-P-35
Teflon

TNC Female
Beryllium Copper, Gold
MIL-G-45204, Type II, Class 2
Passivated Stainless Steel
QQ-P-35
Teflon

06/18/2012

ISO 9001 : 2008 Registered



TECHNICAL DATA SHEET

PE9384


Notes:

- The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



PE9384 CAD Drawing

SMA Male to TNC Female 4 Hole Flange Adapter

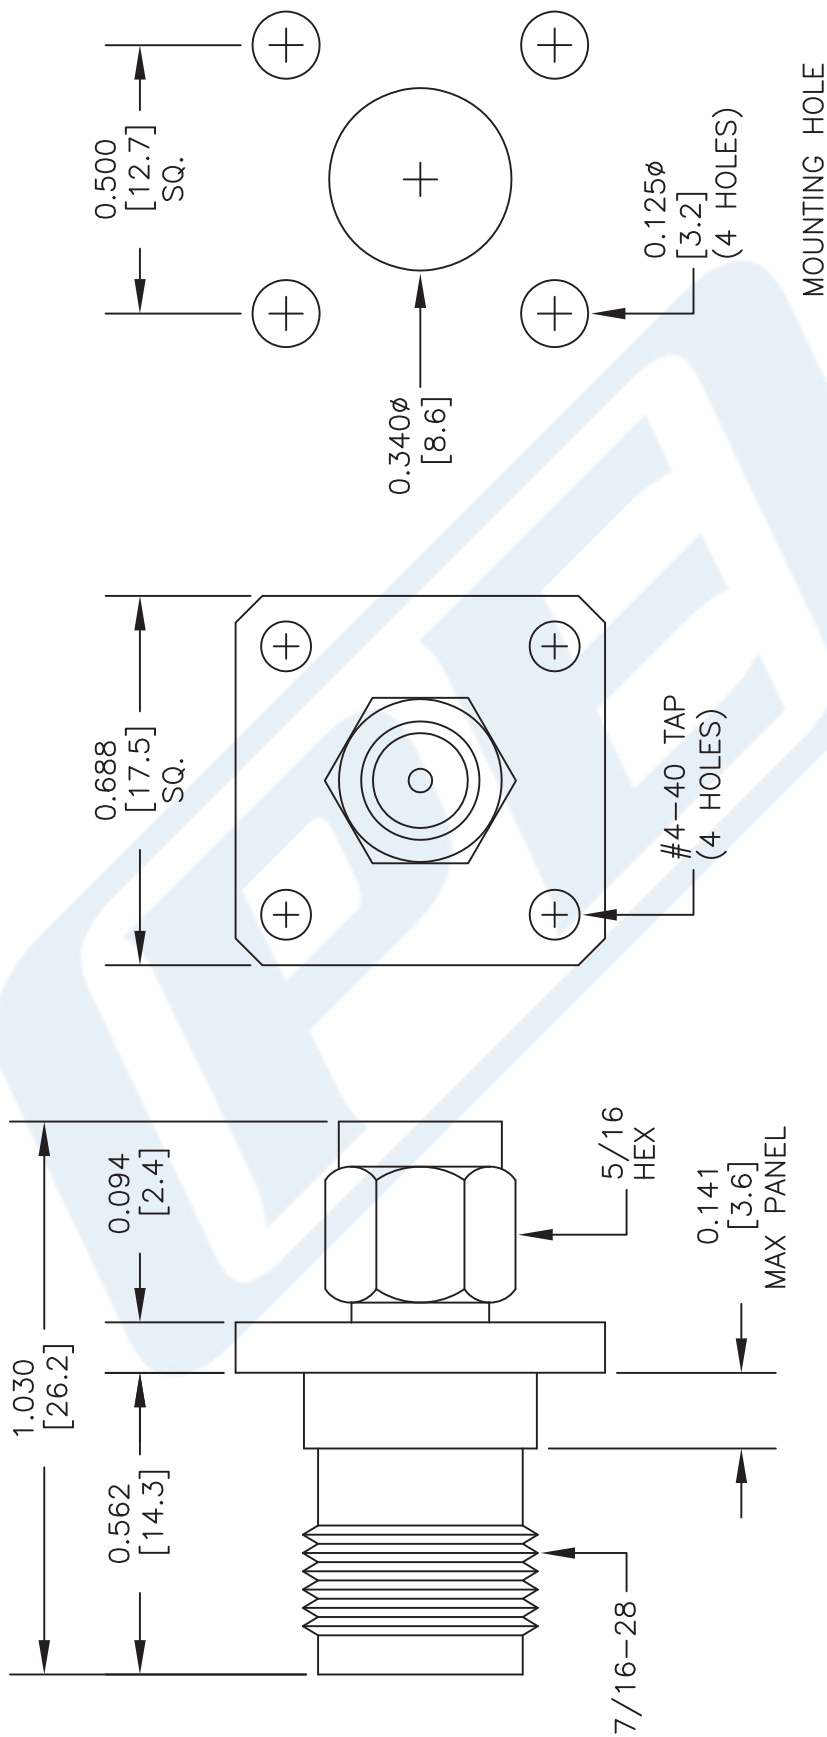

DWG TITLE

PE9384

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 030614

SCALE N/A

SIZE A

2233

PE PASTERNAK
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com