



RF-LAMBDA

The power beyond expectations

RFDU2G2GC

HIGH POWER CAVITY DUPLEXER

RX:2025-2110MHz

TX:2202-2298MHz



- Compact size and high power handle
- Very high rejection outdoor unit
- Compatible with ITU Standard
- N-Female and SMA-F connector available upon request
- Storage temperature -40~+85°C
- Operational Temperature: -25~+70 °C
- Operating Humidity: 0~90% relative

Electrical Specification

Frequency Range: RX:2025-2110MHz
TX:2202-2298MHz



Insertion Loss: CH1: 0.8dB max
CH2: 0.8dB max

Pass band Ripple: 0.5dB maximum

Power Handle: 50W

Isolation between port: 80dB

Impedance: 50 Ω

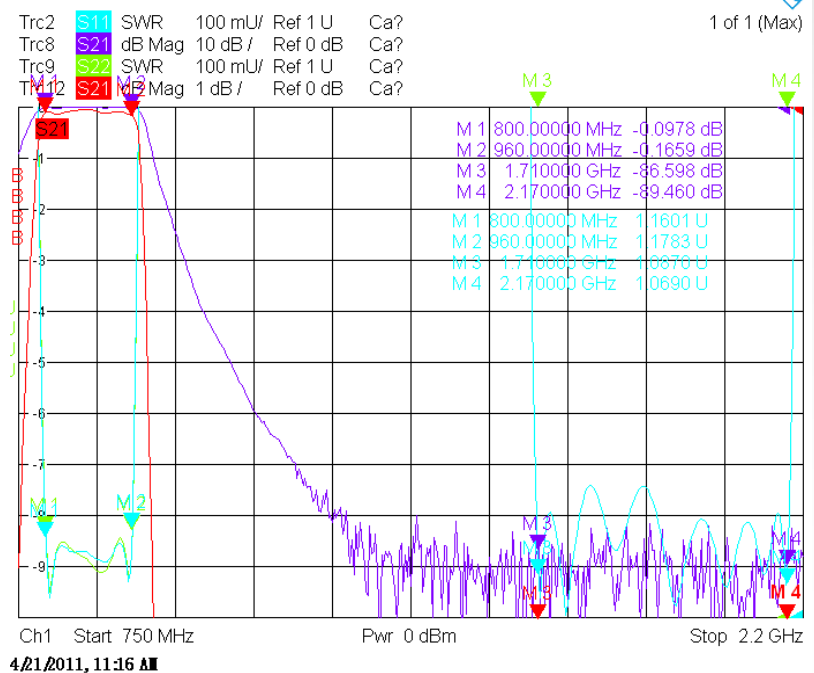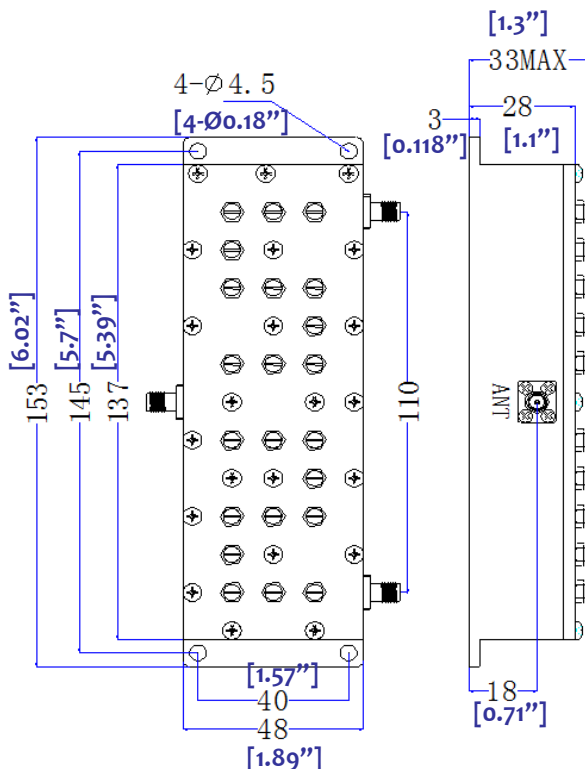

HIGH POWER CAVITY DUPLEXER 2025-2110MHZ & 2202-2298MHZ