


剥线尺寸
stripping dimension

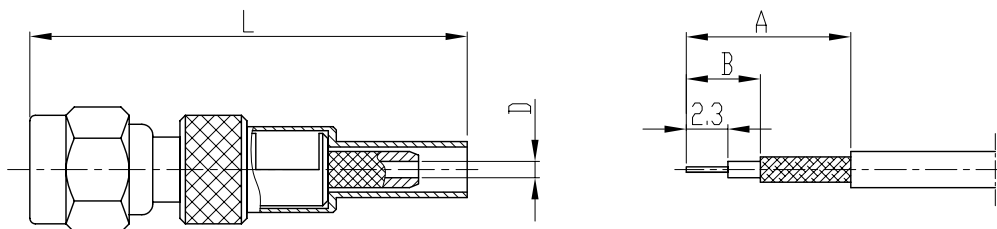

产品型号 type	L	D	A	B	电缆型号 cable type
SMC-K2	24.2	∅0.9	9.1	3.6	SFT-50-1、RG178/U
SMC-K3	28.0	∅1.6	8.3	3.3	SFT-50-1.5-1、RG316/U

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~4Ghz
- Contact resistance
Center conductor: ≤6.0 mΩ
Out conductor: ≤1.0 mΩ
- Insulation resistance: ≥1000MΩ
- Insulator withstanding: 750V
- VSWR: ≤1.35
- Durability: 5000cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~4Ghz
- 接触电阻:
中心导体: ≤6.0 mΩ
外导体: ≤1.0 mΩ
- 绝缘电阻: ≥1000MΩ
- 介质耐压: 750V
- 电压驻波比: ≤1.35
- 插拔次数: 5000次

Application: MIL-C-39012/73A


执行标准: MIL-C-39012/73A

Material&Finishing

- Center contact:
Female: beryllium copper, gold plated
- Bodies: brass, gold plated
- Crimp ferrule: copper, nickel plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
插孔: 铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 线夹: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯

		SCALE		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE <table><tr><th>FRACTIONS</th><th>DECIMALS</th><th>ANGLES</th></tr><tr><td>.X± .15</td><td></td><td>±1°</td></tr><tr><td>.XX± .05</td><td></td><td></td></tr><tr><td>.XXX±</td><td></td><td></td></tr></table>	FRACTIONS	DECIMALS	ANGLES	.X± .15		±1°	.XX± .05			.XXX±		
FRACTIONS	DECIMALS	ANGLES														
.X± .15		±1°														
.XX± .05																
.XXX±																
		2.5:1														
NAME		DATE														
DRAWN																
CHECKED																
APPROVED																

SMC-K2

RF COAXIAL CONNECTOR

西安富士达科技股份有限公司

XI'AN FORSTAR S&T CO.,LTD.

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.