


※ 型号描述 How to Order

XB-WI -□□□-□□□

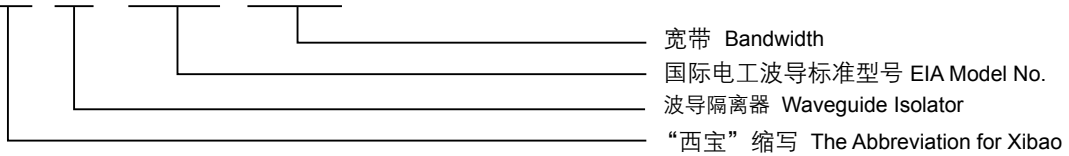

※ 型号及指标 Model & Specifications

型号 PN	频率 Freq (Ghz)	带宽 Bandwidth (MHz)	插损 IL (dB)	隔离 IS (dB)	驻波 VSWR	工作温度 Operating Temp(°C)	外形尺寸 Size (mm)
XB-WI112-□□□	7.7-8.4	Full	0.3	23	1.20	-40~+80	36×75×48
XB-WI112-□□□	7.25-8.4	Full	0.4	20	1.25	-40~+80	69×83×44
XB-WI90-□□□	10-11	Full	0.4	20	1.15	0~+70	70×42×42
XB-WI90-□□□	8-12.4	300	0.2	30	1.15	-40~+80	28×56×42
XB-WI90-□□□	8-12.4	1000	0.3	23	1.20	-40~+80	28×56×42
XB-WI75-□□□	10-15	500	0.25	25	1.15	-40~+80	25×52×38
XB-WI75-□□□	10-15	1000	0.3	23	1.20	-40~+80	25×52×38
XB-WI75-□□□	10-15	500	0.25	25	1.15	-40~+80	28×52×38
XB-WI75-□□□	10-15	1000	0.3	23	1.20	-40~+80	28×52×38
XB-WI62-□□□	12-18	500	0.3	25	1.15	-40~+80	21×52×33
XB-WI62-□□□	12-18	1000	0.3	23	1.20	-40~+80	21×52×33
XB-WI51-□□□	14.5-22.0	1000	0.3	25	1.20	-40~+80	15×40×33
XB-WI42-□□□	17.6-26.5	2000	0.4	18	1.30	-40~+80	9.5×32×22
XB-WI42-□□□	17.6-26.5	500	0.3	28	1.15	-40~+80	13×32×22
XB-WI42-□□□	17.6-26.5	1000	0.4	23	1.20	-40~+80	13×32×22
XB-WI34-□□□	24.5-26.5	Full	0.4	17	1.40	-40~+80	9.5×32×22
XB-WI34-□□□	27.5-29.5	Full	0.4	17	1.40	-40~+80	9.5×32×22
XB-WI34-□□□	21.7-33.0	1000	0.3	23	1.20	-40~+80	13×32×21
XB-WI28-□□□	26.5-40	1000	0.5	20	1.20	-40~+80	5×25×19
XB-WI28-□□□	26.5-40	1000	0.3	25	1.20	-40~+80	10×28×19
XB-WI28-□□□	26.5-40	2000	0.35	22	1.22	-40~+80	10×28×19
XB-WI28-□□□	26.5-40	3000	0.4	20	1.25	-40~+80	13×32×19
XB-WI28-□□□	37-40	Full	0.4	17	1.40	-40~+80	9.5×32×22
XB-WI28-□□□	33.4-36.6	Full	1.0	40	1.25	-40~+80	20×28×19
XB-WI28-□□□	33.4-36.6	Full	1.5	60	1.25	-40~+80	30×28×19
XB-WI22-□□□	32.9-50.1	1000	0.6	25	1.20	-40~+80	10×26×19
XB-WI22-□□□	32.9-50.1	2000	0.6	23	1.25	-40~+80	10×26×19
XB-WI19-□□□	39.2-59.6	1000	0.6	25	1.20	-40~+80	10×25×19
XB-WI19-□□□	39.2-59.6	2000	0.6	23	1.25	-40~+80	10×25×19
XB-WI10-□□□	84-100	1000	0.8	23	1.25	-40~+80	10×22×19
XB-WI10-□□□	84-100	2000	1.0	20	1.30	-40~+80	10×22×19

※ 以上只是常规产品，其它品种的频率覆盖范围可从 1.45~110GHz，波导型号可从 WR510 (BJ18) ~WR10 (BJ900)
 ※ Other Products: F=1.45~110GHz, Waveguide WR510 (BJ18)~WR10 (BJ900)