


	Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions	Approved	Date
		Description/Approved/Date	M.H.	7/12/99
			Checked	Date
			M.H.	7/12/99
			Drawn	Date
			K.R.E.	7/11/99
		NOTES (plating thickness in micro-inches):		
		1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike		



ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Nickel, Note 9
Center Contact: Male	Brass, Note 1	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	--	--
Hex Nut	--	--
Lock Washer	--	--

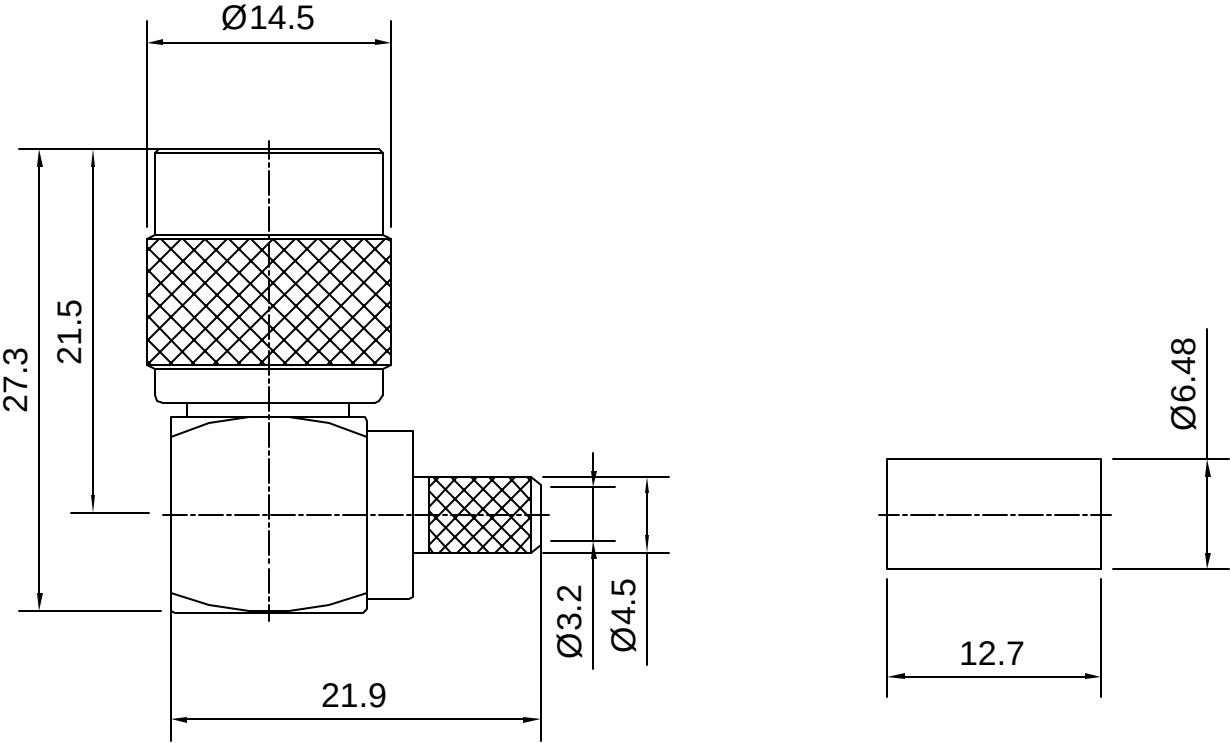

Lighthouse Technologies, Inc.

4907 Morena Boulevard, #1411
San Diego, California 92117

Part Number:
LTI-TLM11NT-58

Description		
TNC right angle crimp plug for RG-58. Nickel plated		
brass body, teflon dielectric.		
Scale	Drawing No.	File Name
2:1	TNC/TLM11-58	TLM11-58