





20 dB/100W Attenuator

AR-0030-100-20N

Specifications:

Frequency Range:	DC-3 GHz
VSWR:	1.20:1 Max
Power:	100 Watts Avg
Attenuation:	20 dB, ± 1.0 dB
Impedance:	50 Ohms
Connectors:	N female, N male
Operating Temp. Range:	-20°C to +60°C

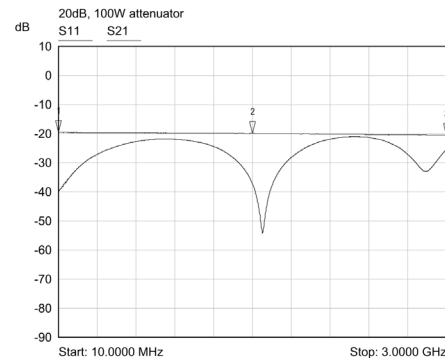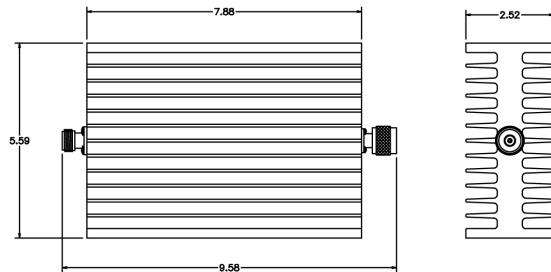

Mkr	Trace	X-Axis	Value	Notes
1	S21	10.0000 MHz	-19.56 dB	
2	S21	1.5050 GHz	-19.89 dB	
3	S21	3.0000 GHz	-20.55 dB	

MICROWAVE FILTER CO., INC.
 6743 KINNE STREET, E. SYRACUSE, NY 13057
 E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
 Web: www.microwavefilter.com