


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

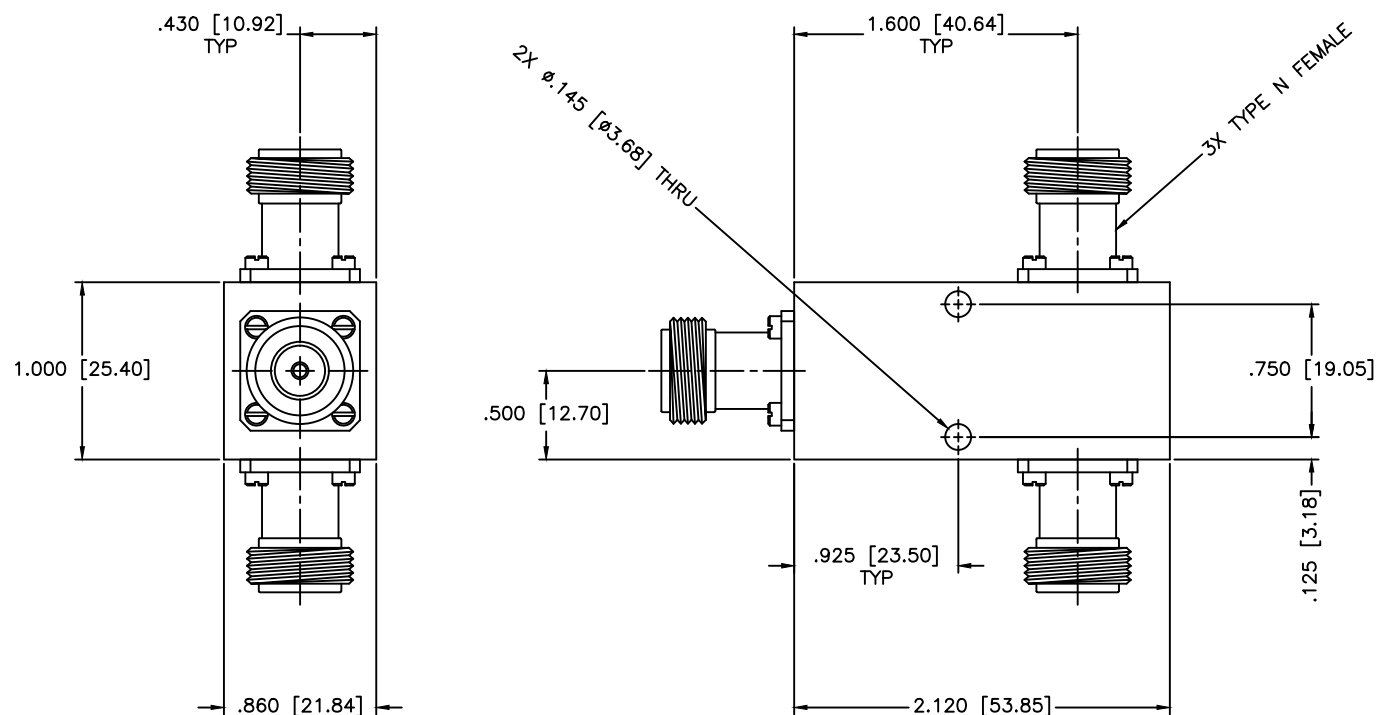

SPECIFICATIONS

Frequency Range: 2–4 GHz
 Insertion Loss: 0.4dB Max.
 Isolation: 18dB Min.
 VSWR In/Out: 1.30:1/1.20:1 Max.
 Phase Balance: ± 3 Deg. Max.
 Amplitude Balance: ± 0.3 dB Max.
 Power: 30W (Load vswr@1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:			
DRAWN: Paiboon Luekhamhan DATE: 04-30-2004		2-WAY POWER DIVIDER PART NO. PS2-101/NF			
APPROVED: T. Nguyen DATE: 04-30-2004		CAGE CODE: OD2L5 SIZE: A REV: N/A DO NOT SCALE THE DRAWING			
DWG. NO. 83783		THIRD ANGLE PROJECTION			