


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

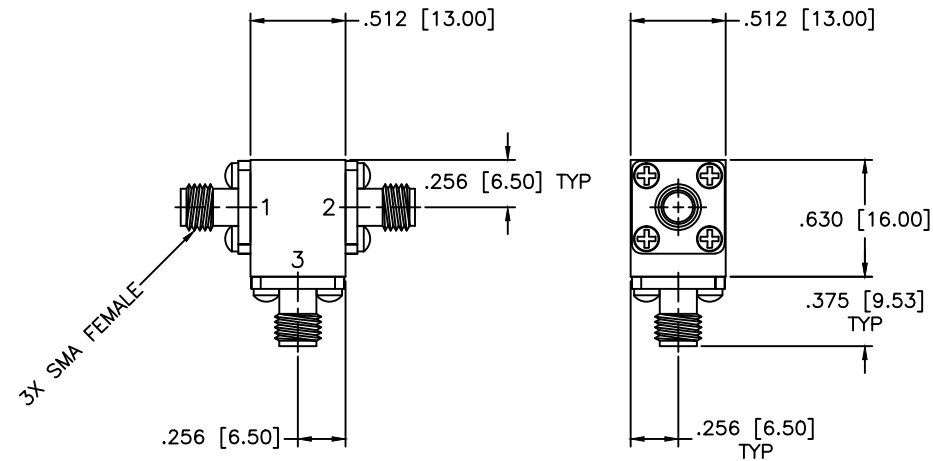

SPECIFICATIONS

Frequency Range: 15–18.2 GHz
 Isolation: 23dB Min.
 Insertion loss: 0.4dB Max.
 VSWR: 1.15:1 Max.
 Circulator Power: 25W Avg, 250W Peak.
 Operating Temperature: –54°C to +85°C

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE:	N/A
				SHEET:	N/A
DRAWN: Paiboon Luekhamhan DATE: 02-16-2011 APPROVED: T. Nguyen DATE: 02-16-2011		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:	
		COAXIAL CIRCULATOR CS-159		PART NO.	
		CAGE CODE: OD2L5 SIZE: A REV: N/A DO NOT SCALE THE DRAWING		DWG NO. 85336	