

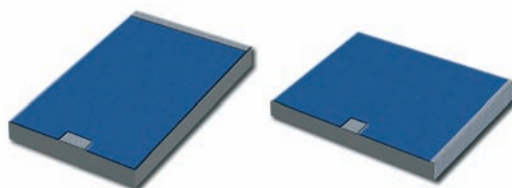



Standards
NF C 96-315
MIL-DTL-39030

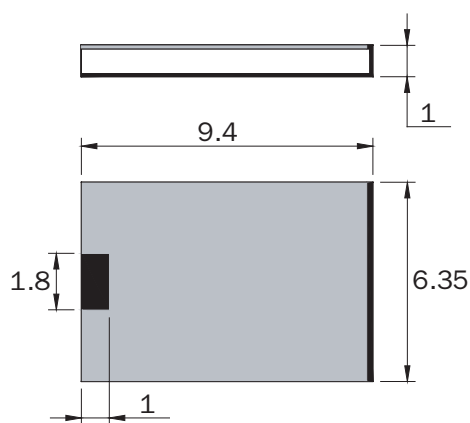

Substrate	AlN
Resistive film	Thick film
Protection film	Epoxy
Contacts finition	Silver over Nickel barrier



40-0327Y

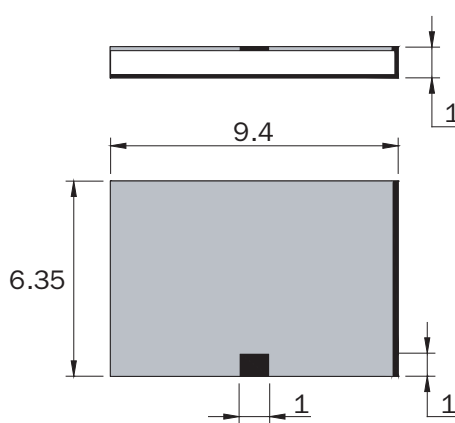

40-0316Y

Dimensions in mm

P/N	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR
40-0316Y	2.2	120	50	1.20
40-0327Y	3	120	50	1.20

mm	inch
1	0.039
1.8	0.071
6.35	0.250
9.4	0.370

Available on Tap and Reel Packaging