


MECHANICAL CHARACTERISTICS	
INTERFACE	MIL-STD-348, FIGURE 310-1
IN ACCORDANCE WITH THE INTENT OF SLANT SHEET	MIL-PRF-39012/55 REF.
RECOMMENDED MATING TORQUE	9 IN-LBS. NOM.
COUPLING PROOF TORQUE	15 IN-LBS. MIN.
COUPLING NUT RETENTION	60 LBS. MIN.
FORCE TO ENGAGE	2 IN-LBS. MAX.
FORCE TO DISENGAGE	2 IN-LBS. MIN.
DURABILITY	500 CYCLES MIN.
AXIAL CONTACT RETENTION (FROM INTERFACE)	6 LBS. MIN.
AXIAL CONTACT RETENTION (FROM CABLE)	6 LBS. MIN.
CENTER CONTACT INSERTION (FROM CABLE)	3 LBS. MAX
CENTER CONTACT WITHDRAW (FROM CABLE)	1 Oz. MIN.
CABLE RETENTION	10 LBS MIN.
MASS	2.48 GRAMS NOM.
ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	32 GHz
VSWR DC - 18 GHz	1.12:1 MAX.
18 - 26.5 GHz	1.16:1 MAX.
26.5 GHz - 32 GHz	1.22:1 MAX.
INSERTION LOSS	0.03 √F (GHz) dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	650 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 18 GHz	-90 dB MIN.
18 GHz - 32 GHz	TBD
CORONA	170 Vrms MIN. @ 70,000 FEET
RF HIGH POTENTIAL	425 Vrms MIN.
CONTACT RESISTANCE (INNER)	4.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	2.0 MilliOhms MAX.
ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-62°C TO 165°C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION D
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, CONDITION (NO VIBRATION)
MATERIALS AND FINISH	
COUPLING NUT	STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, PASSIVATE PER ASTM-A-967
BODY	STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, GOLD PLATED PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290
CONTACT	BERYLLIUM COPPER, ASTM-B-196 GOLD PLATED PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290
SNAP RING	BERYLLIUM COPPER, PER ASTM-B-197
INSULATOR(S)	TFE FLUOROCARBON PER ASTM-D-1710
DIELECTRIC BEAD	POLYETHERIMIDE THERMOPLASTIC, PER ASTM-D-5205
GASKET	SILICONE RUBBER PER ZZ-R-765
APPLICATION	
CABLE	088D/092D
INSTALLATION	PER CONFIGURATOR
CONNECTOR CODE SHEET 1	300
CONNECTOR CODE SHEET 2	3Q0

THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.

REV.	DESCRIPTION	DATE	BY	APPVD
A	ECO 85356	6/17/2008	MJM	RS
B	ECO 135231	4/25/2013	MJM	RS



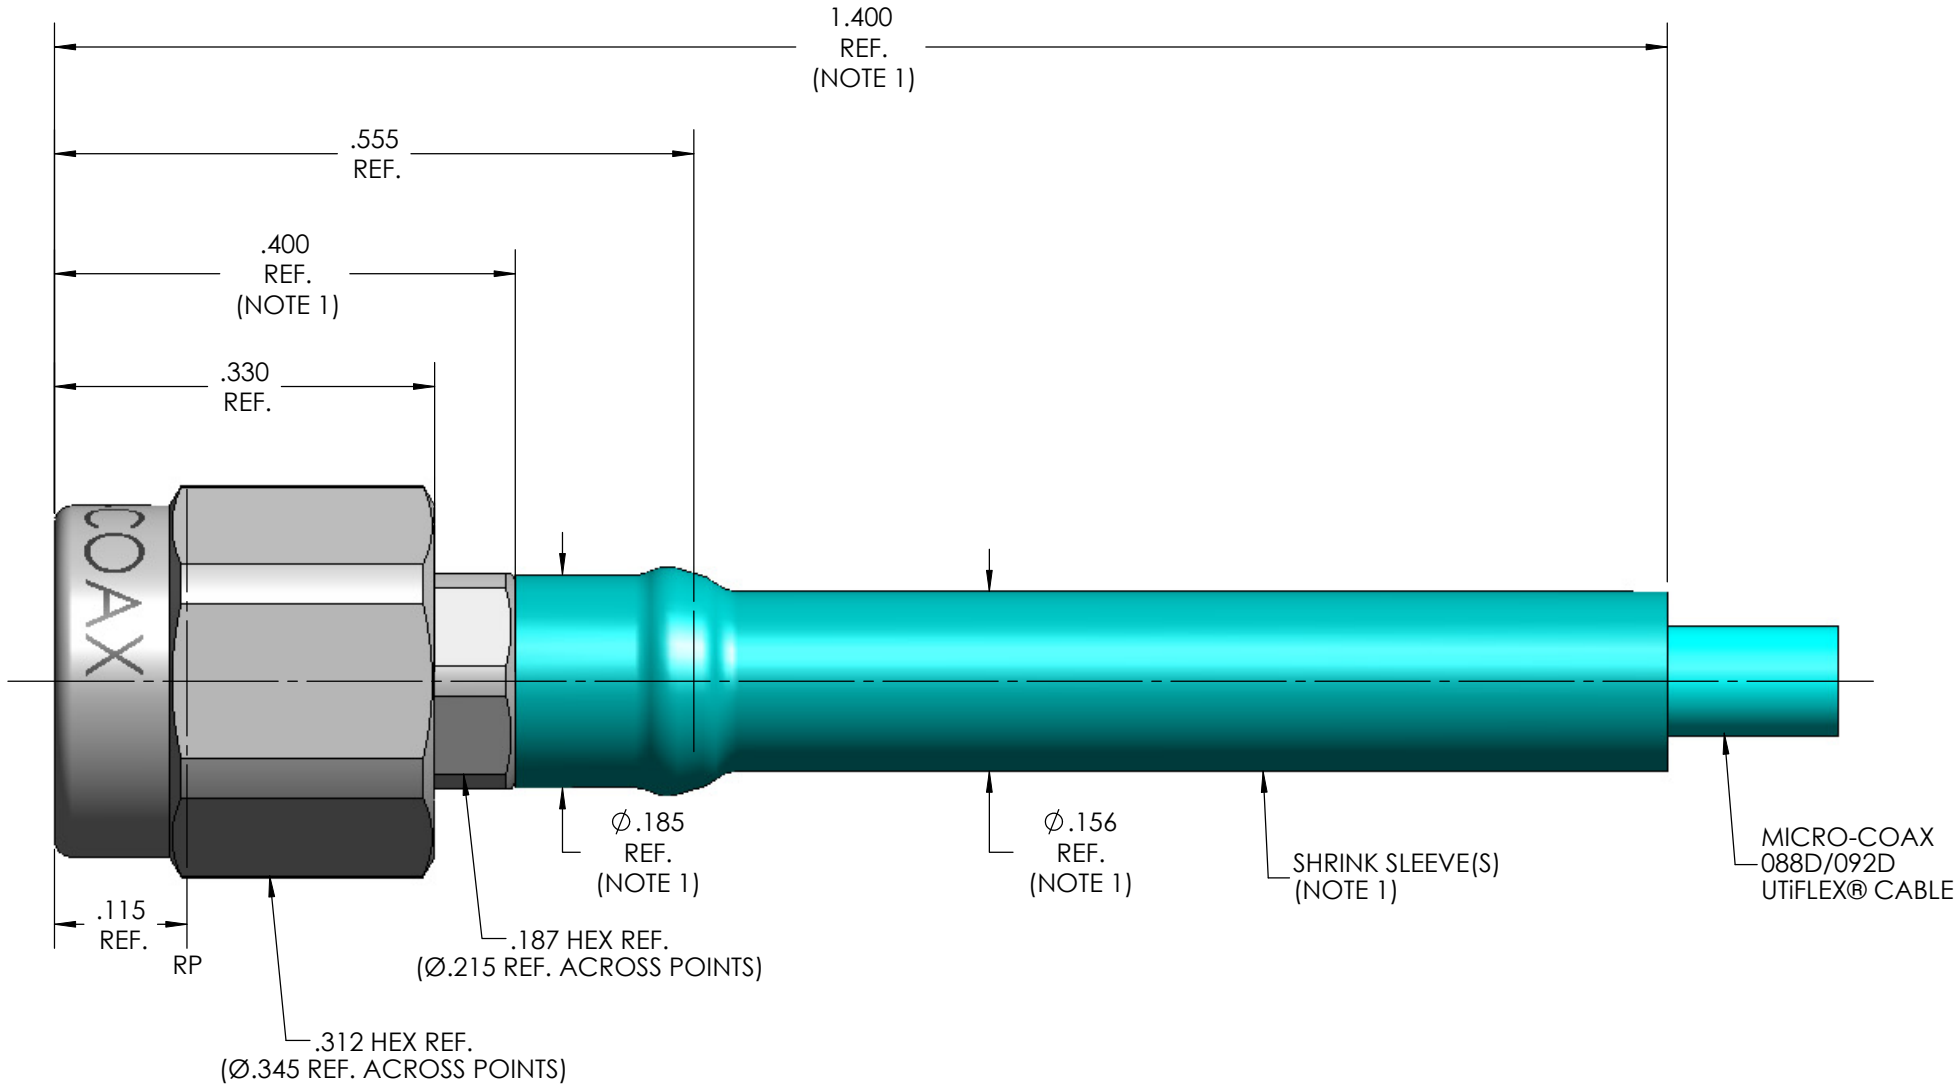


NOTE:

- MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.
- SEE SHEET 2 FOR HEAT SHRINK FORMED ELBOW CONFIGURATION.

SPECIFICATION DRAWING

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.		INITIALS		DATE		<div><b>MICRO-COAX</b><sup>®</sup></div> <div>Leading the way in transmission line solutions.</div> <div>Copyright Micro-Coax, Inc.</div>					
		DWN.	RDM	6/9/03							
		CHKD.	CCF	4/29/13							
		APPVD.									
TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE									
		SMA PLUG, 088D/092D, HIGH FREQUENCY									
.XX	± .02	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.				FSCM NO.	SIZE	SCALE	SHEET NO.	DRAWING NO.	REV
.XXX	± .005					64639	B	6:1	1 OF 2	SD903323	B
.XXXX	± .0010										
ANGLES	± 2°										

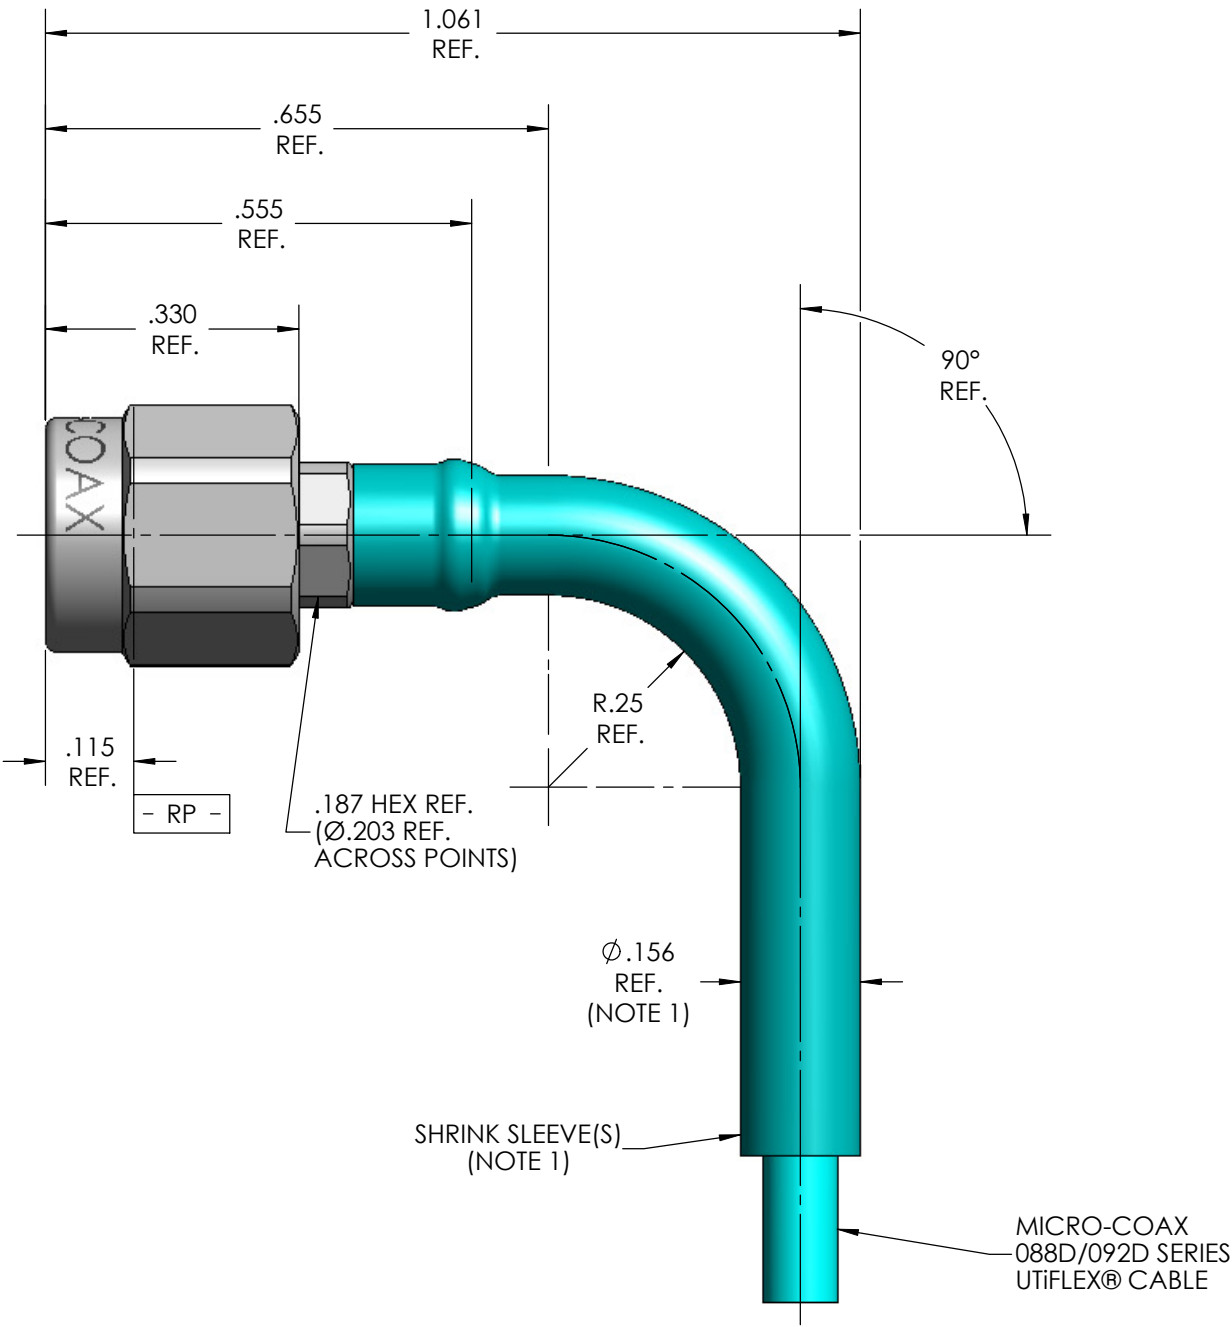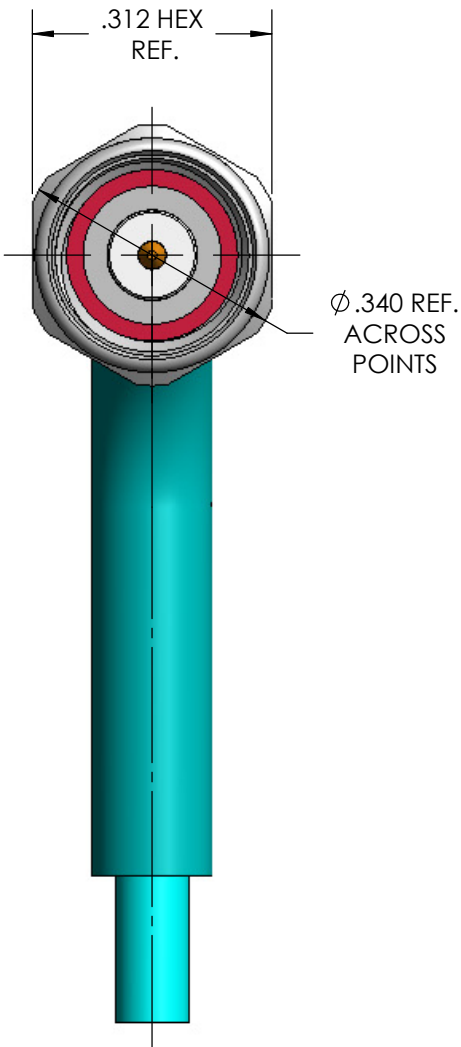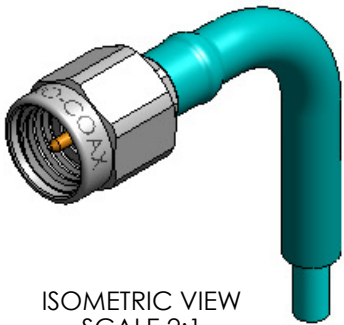

NOTE:  
1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND  
IS SUBJECT TO CHANGE WITHOUT NOTICE.

ALL DIMENSIONS AND TOLERANCES IN INCHES UNLESS OTHERWISE SPECIFIED.		INITIALS		DATE		<b>MICRO-COAX</b> <sup>®</sup> <i>Leading the way in transmission line solutions.</i> <i>Copyright Micro-Coax, Inc.</i>			
		DWN.	RDM	6/9/03					
		CHKD.	CCF	4/29/13					
		APPVD.							
.XX	± .02	TITLE		SMA PLUG, HIGH FREQUENCY, HEAT SHRINK FORMED ELBOW, 088D/092D					
.XXX	± .005								
.XXXX	± .0010								
ANGLES	± 2°								
				FSCM NO.	SIZE	SCALE	SHEET NO.	DRAWING NO.	REV.
				64639	B	4:1	2 OF 2	SD903323	B