



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date:

Product Name: SAW Filter 441.265MHz SMD 3.8×3.8mm

TST Parts No.: TA0594A

Customer Parts No.: _____

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Asin Lin

Approval by: _____ Francis Chen

Date: _____ 2006/09/13



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 441.265MHz

MODEL NO.: TA0594A

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 10 dB_m
2. DC voltage: 3 V
3. Operating Temperature: +15°C to +35°C
4. Storage Temperature: -40°C to +85°C


RoHS Compliant
Lead free
Lead-free soldering

B. CHARACTERISTICS:



Item			Min.	Typical	Max.
Center frequency	F _c	MH	-	441.265	-
Insertion loss	438.765 ~ 443.765 MHz IL	dB	-	2.2	3.6
Amplitude ripple	438.765 ~ 443.765 MHz	dB	-	0.7	2.1
VSWR	438.765 ~ 443.765 MHz	dB	-	1.45	2.1
Attenuation (Reference level from 0 dB)					
1 ~ 385.0	MHz	dB	40	50	-
385.0 ~ 394.0	MHz	dB	31	50	-
394.0 ~ 429.0	MHz	dB	10	35	-
482.0 ~ 500.0	MHz	dB	37	50	-
500.0 ~ 550.0	MHz	dB	40	50	-
Temperature coefficient of frequency		ppm/k	-	-36	-
Source impedance	Z _s	Ω	-	50	-
Load impedance	Z _L	Ω	-	50	-

Note1. No matching network required for operation at 50Ω


C. MEASUREMENT CIRCUIT:

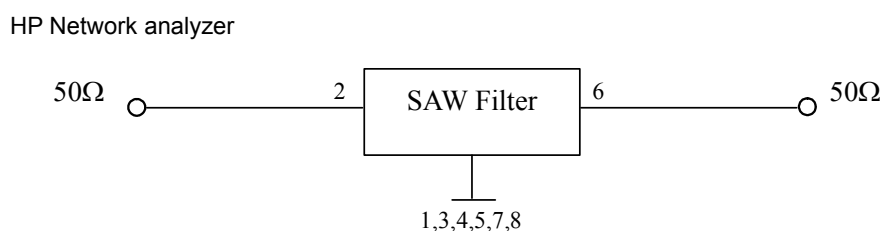


D. TRANSFER FUNCTION :

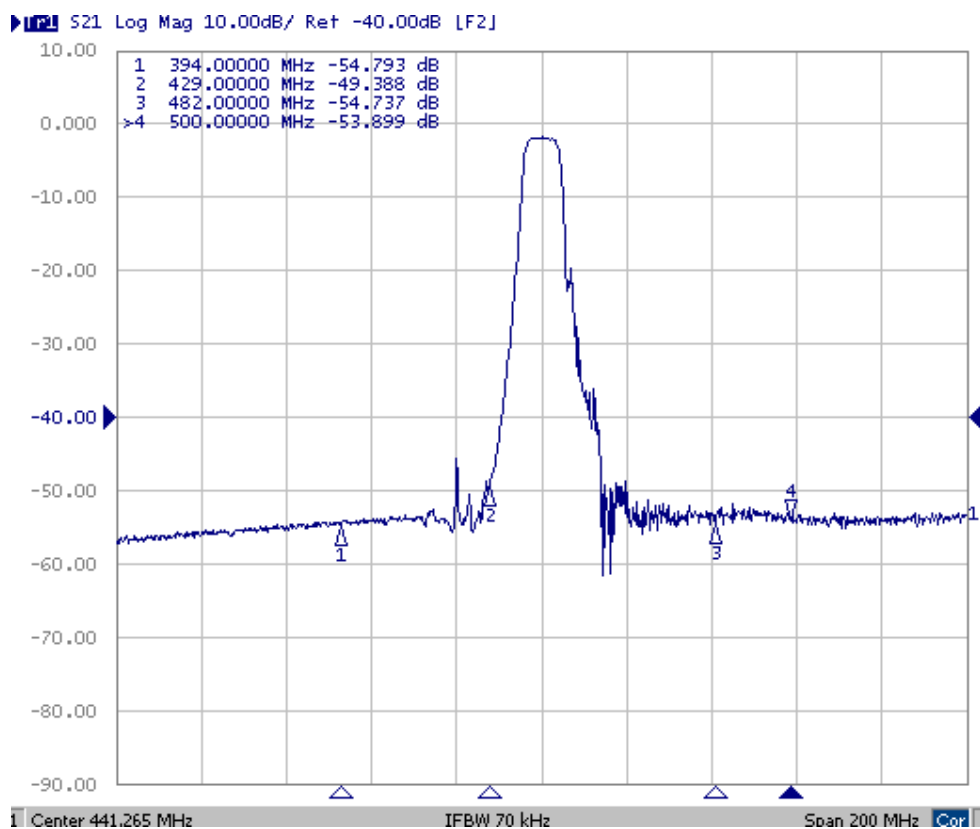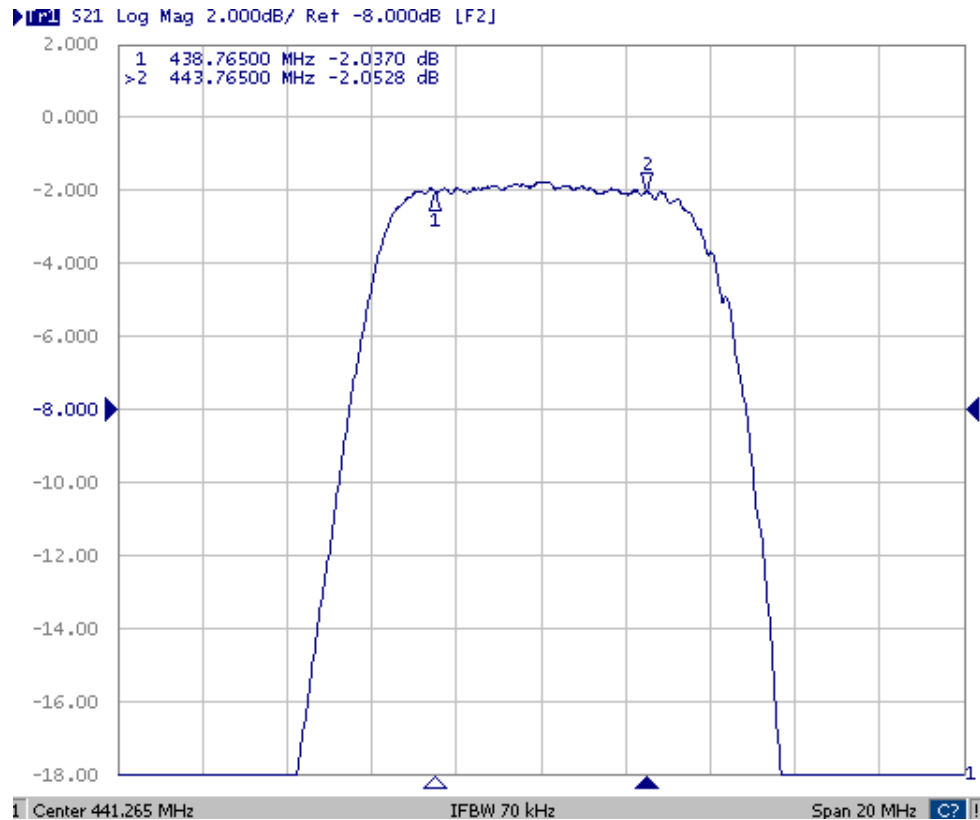


VSWR S11

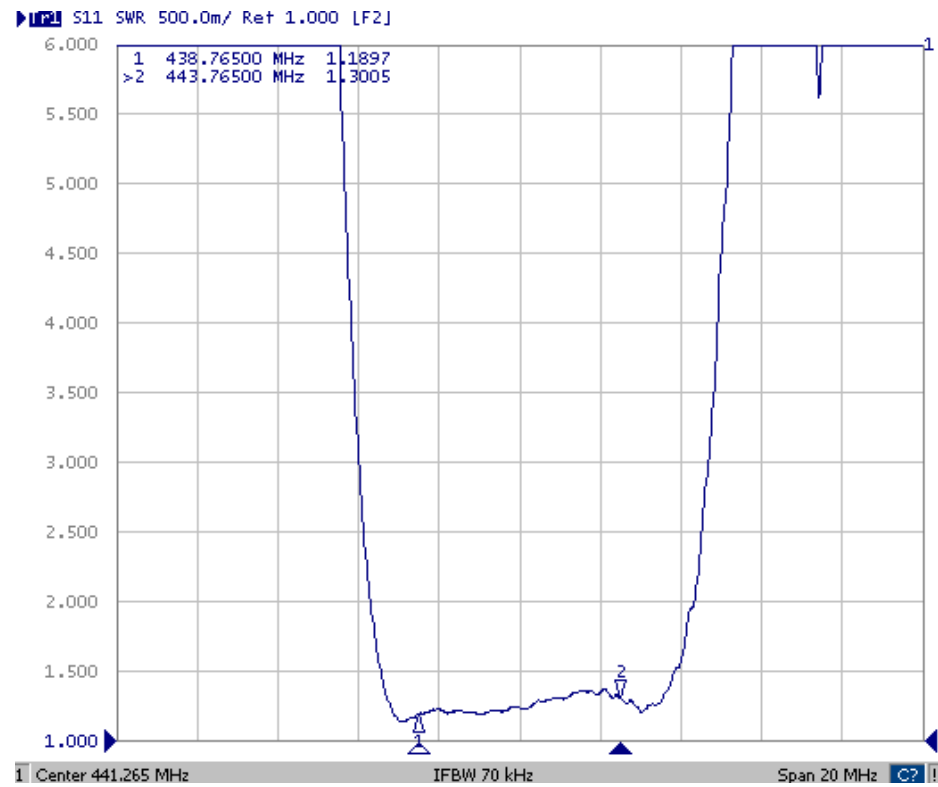

VSWR S22

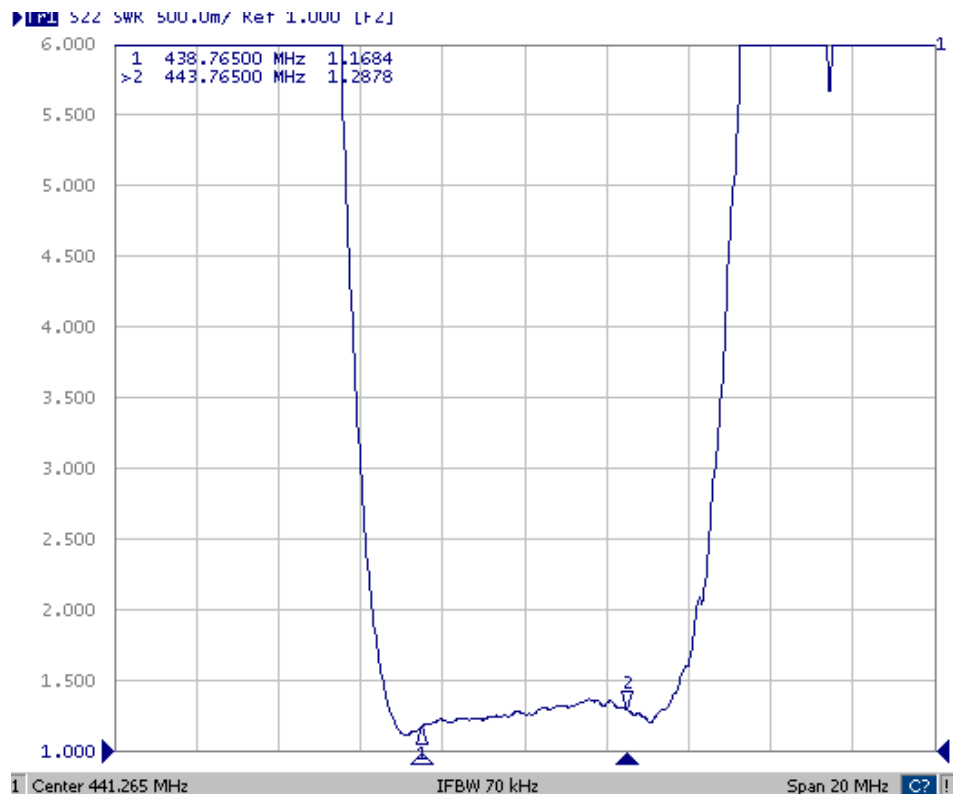

E.OUTLINE DRAWING:

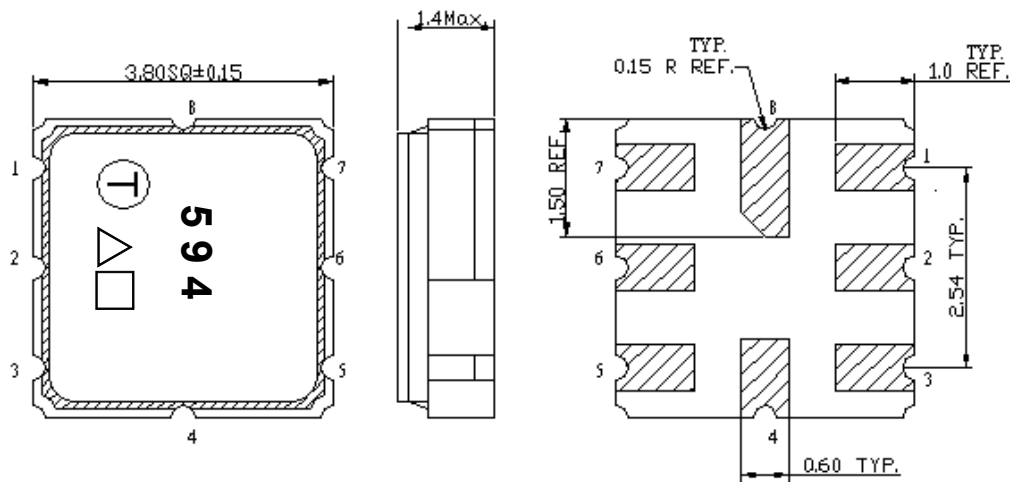

2 : Input

6: Output

1,3,4,5,7,8 Ground

△:Year Code


□: Date Code(Follow the table provided by planner each year.)

Unit: mm

△ Product Year Code


Year	2005	2006
	2007	2008
	2009	2010
	.	.
Product Code	A	a

F.PCB FOOTPRINT:

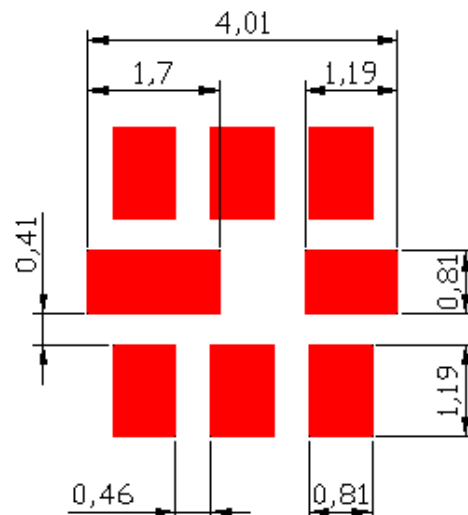


G. PACKING:

1. REEL DIMENSION

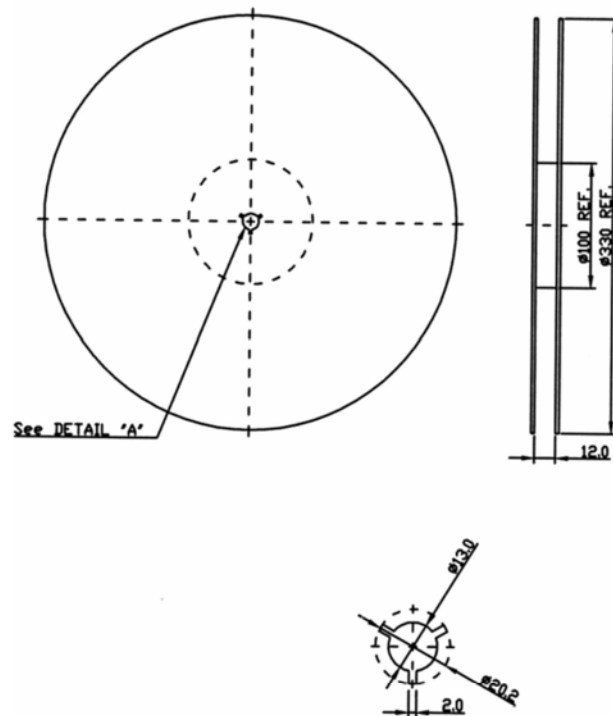

2. TAPE DIMENSION

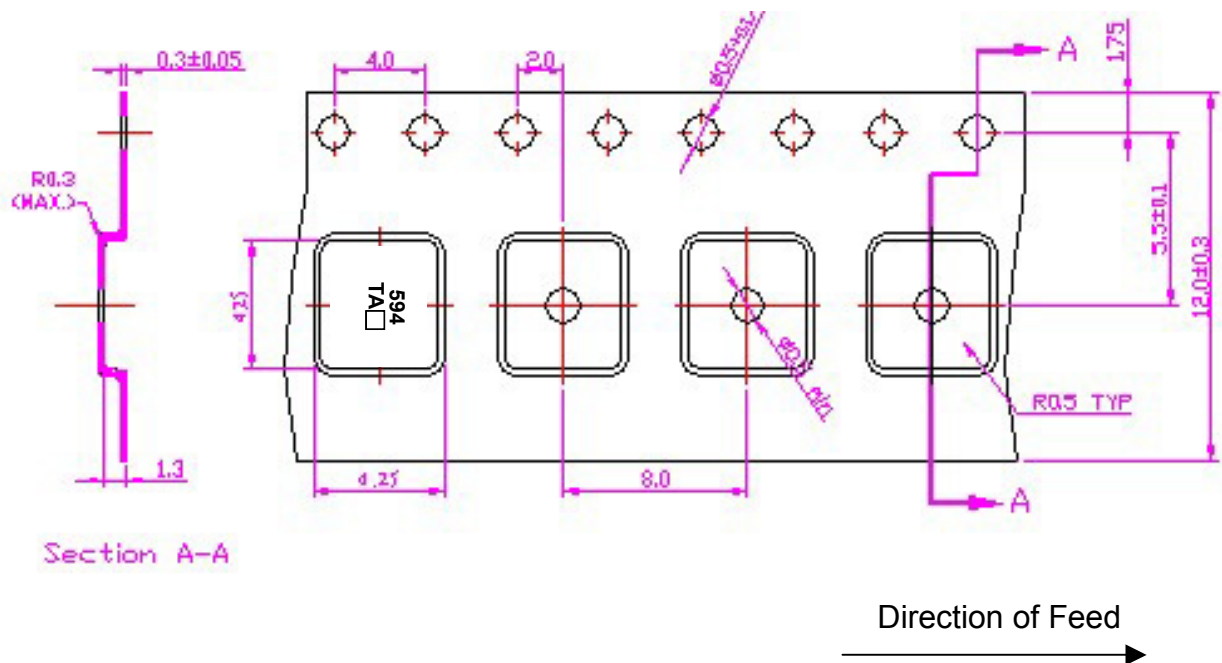

H. REFLOW PROFILE

