

MCX-PLUG RG174 RG316 RIGHT ANGLE

SC9466

SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 0-3 GHZ
VSWR 1.25:1 MAX
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55C to +125C

MECHANICAL:

MATERIAL BODY: BRASS AU PLATING
CENTER CONTACT: BRASS
CONTACT PLATING: 30 μ -in
CAPTIVATED CONTACT
INSULATOR: TEFLON
ROHS COMPLIANT

ASSEMBLY

TRIM CABLE AS SHOWN,
SLIDE CRIMP SLEEVE ON CABLE,
PUSH CABLE INTO CONTACT SLOT,
SLIDE SLEEVE FORWARD & CRIMP,
SOLDER CENTER CONDUCTOR,
APPLY CAP

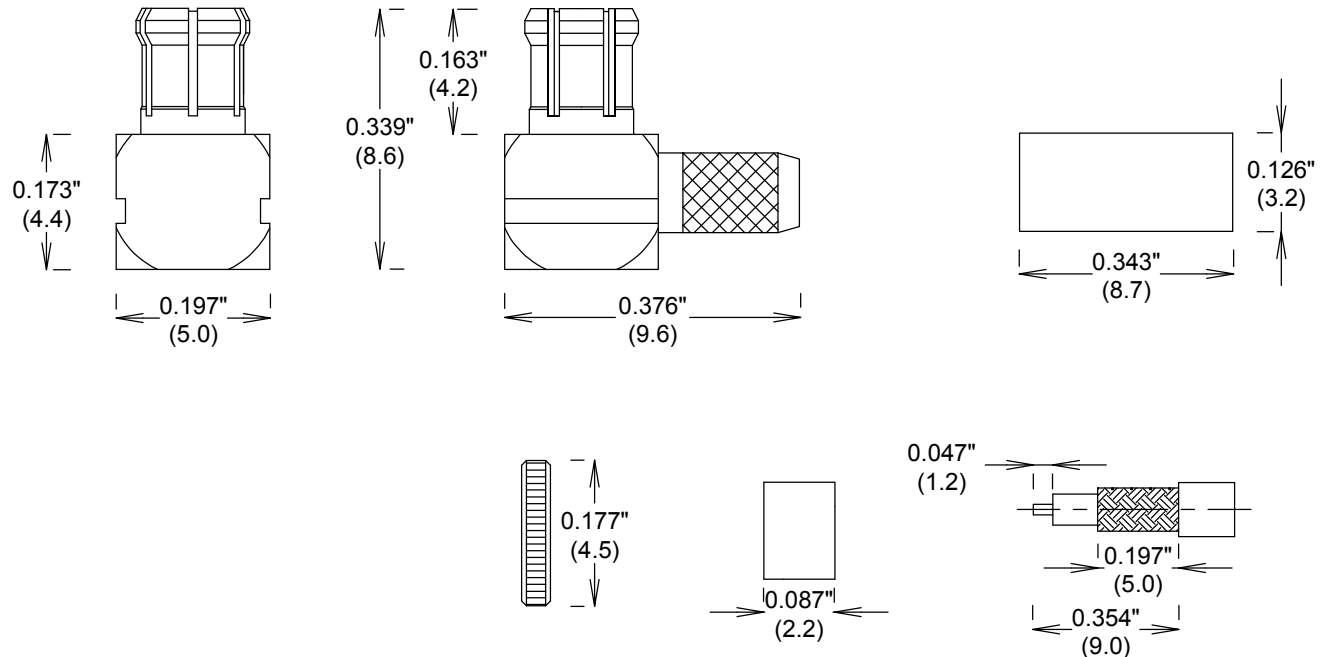

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

MCX-PLUG RG174 RG316 RIGHT ANGLE

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC9466	
SCALE	SHEET		

ALL DIMENSIONS IN inches(MM) Typical