


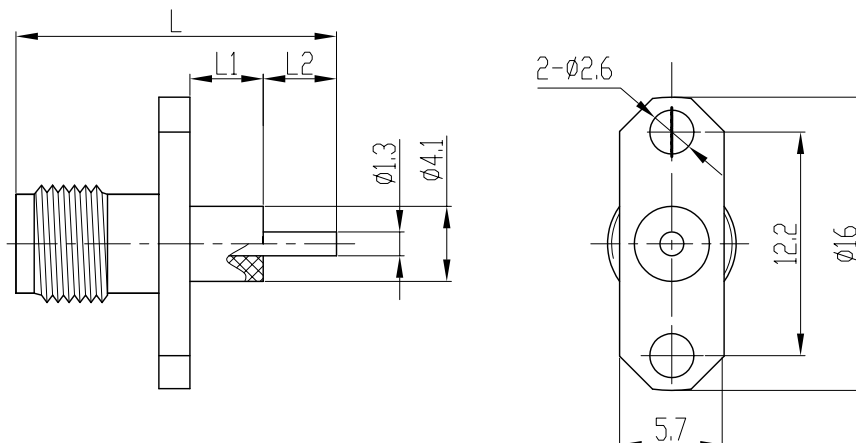

产品型号 type	L	L1	L2	产品型号 type	L	L1	L2
SMA-KFD3	27.4	14.8	3.0	SMA-KFD328G	14.9	3.2	1.3
SMA-KFD5A	17.5	4.0	4.0	SMA-KFD339	16.5	5.0	2.0
SMA-KFD21	15.5	2.0	4.0	SMA-KFD342	37.0	24.5	3.0
SMA-KFD46	16.5	4.0	3.0	SMA-KFD348	11.5	0	2.0
SMA-KFD57	17.4	4.8	3.0	SMA-KFD376	21.0	8.3	3.2
SMA-KFD84	15.6	3.0	3.0	SMA-KFD384	17.8	3.2	5.1
SMA-KFD102	17.6	5.0	3.0	SMA-KFD385	17.8	5.0	3.3
SMA-KFD302	15.6	3.9	2.1	SMA-KFD386	19.4	6.1	3.8
SMA-KFD311	17.5	4.5	3.5	SMA-KFD393	16.5	5.0	2.0
SMA-KFD312	20.5	8.0	3.0	SMA-KFD395	17.3	6.3	1.5

Electrical Characteristics:

- Characteristic Impedance: $50\ \Omega$
- Frequency range: DC~18GHz
- Contact resistance
Center conductor: $\leq 3.0\ m\Omega$
Out conductor: $\leq 2.0\ m\Omega$
- Insulation resistance: $\geq 5000M\Omega$
- Insulator withstanding: 1000V
- Durability: 500cycles

Application: MIL-C-39012/55D

Material&Finishing

- Center contact :
Female: beryllium, gold plated
- Body: brass, gold plated
- Insulators: PTFE

主要性能指标:

- 特性阻抗: $50\ \Omega$
- 频率范围: DC~18GHz
- 接触电阻:
中心导体: $\leq 3.0\ m\Omega$
外导体: $\leq 2.0\ m\Omega$
- 绝缘电阻: $\geq 5000M\Omega$
- 介质耐压: 1000V
- 插拔次数: 500次

执行标准: MIL-C-39012/55D

材料和镀层

- 中心接触件:
插孔: 铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

 		SCALE	SMA-KFD3 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .XX± .15 ±1° .XX± .05 .XXX±
		2.5:1		
DRAWN	NAME	DATE		
CHECKED				
APPROVED				

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.