

All components used in this connector
conform to RoHS standards.


**Tolerances**

1-20=+/-0.2
20-30=+/-0.3
30-40=+/-0.4
40-50=+/-0.5
50-100=+/-0.75
100-300=+/-1.5
Angles=+/-1

Dimensions are In Millimeters

Revisions Description/Approved/Date	Approved M.H.	Date
	Checked M.H.	Date
	Drawn K.R.E.	Date
NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750		
5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike		
9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike		

Approved by:
Date:

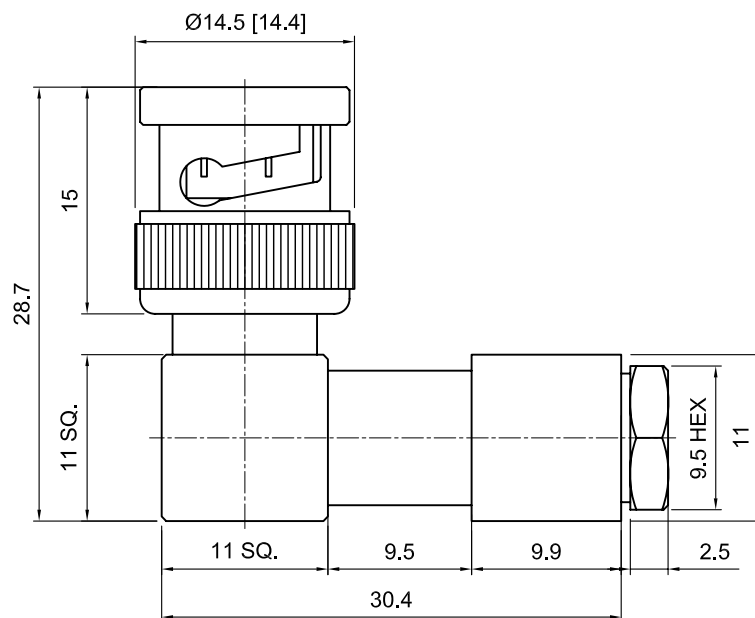

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 9511 Ridgehaven Court, Suite B San Diego, CA 92123 Part Number: LTI-7BLM21NT-59		
Connector Body	Brass, Note 1	Nickel, Note 9			
Center Contact: M	Brass, Note 1	Gold, Note 11			
Insulation	Teflon, Note 5	None			
Ferrule	--	--	Description BNC 75 ohm right angle clamp plug for RG-59,		
Gasket	--	--	Teflon dielectric		
Hex Nut	--	--	Scale 1:1	Drawing No.	File Name
Lock Washer	--	--			