


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

4X ϕ .274 [06.96] THRU

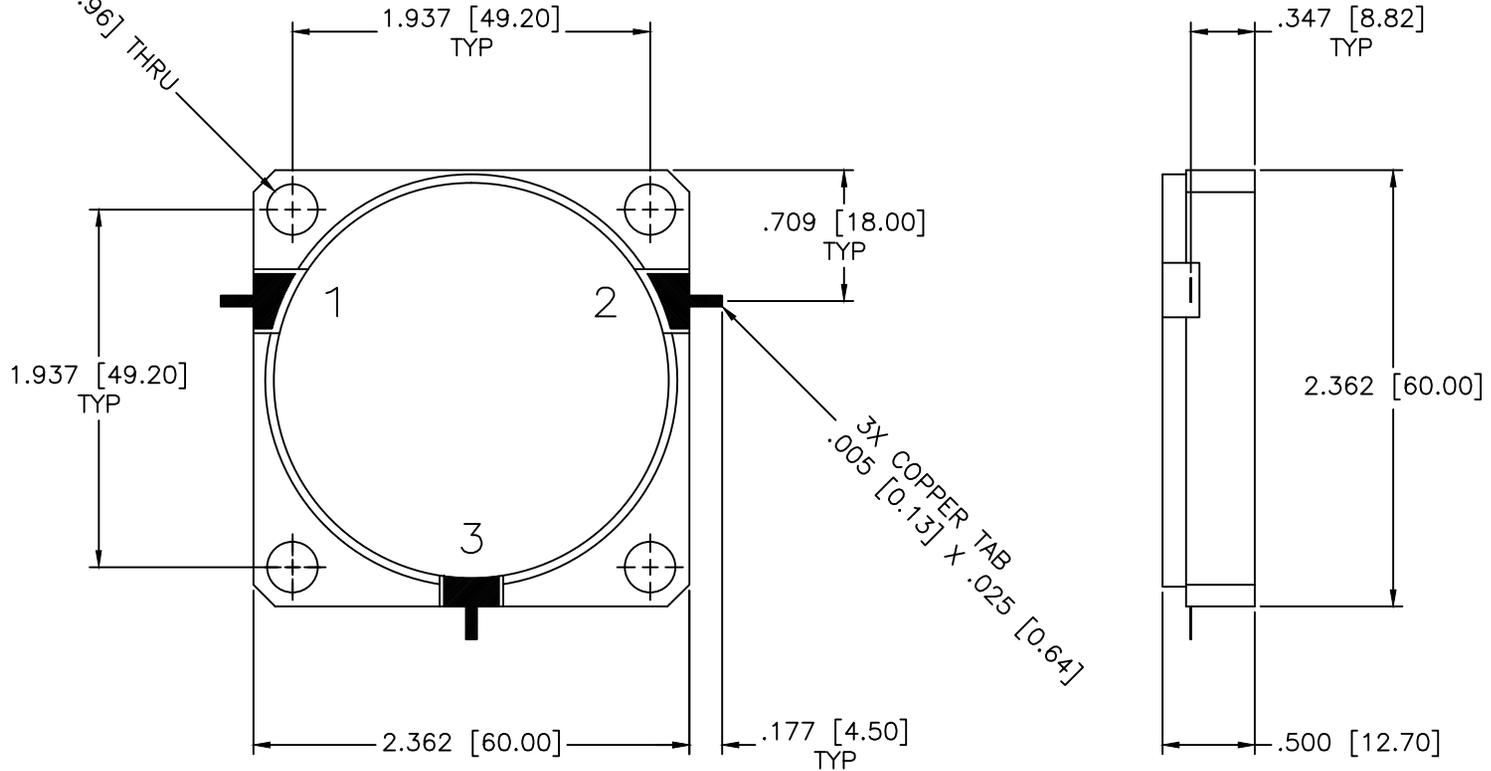

SPECIFICATIONS

Frequency Range: 1–2 GHz
 Isolation: 16dB Min.
 Insertion loss: 0.70dB Max.
 VSWR: 1.40:1 Max.
 Operating Temperature: +10°C to +50°C
 Power: 50W Avg. 500W Peak

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:	DROP-IN CIRCULATOR
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.	MC-34	
DRAWN:	DATE:		CAGE CODE:	SIZE:	REV:	DWG NO.
APPROVED:	DATE:		OD2L5	A	N/A	85545
				DO NOT SCALE THE DRAWING		