
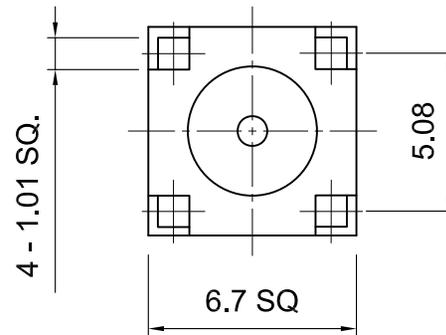


<b>Tolerances</b> 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 <b>Dimensions are In Millimeters</b>	Revisions Description/Approved/Date	Approved M.H.	Date 02/08/99
		Checked M.H.	Date 02/08/99
		Drawn K.R.E.	Date 02/08/99
NOTES (plating thickness in micro-inches):			
1. Per QQ-B-626	5. Per MIL-P-19468	9. Nickel pl. 100 min. over copper strike	
2. Per QQ-S-764	6. Per ZZ-R-765	10. Per QQ-P-35	
3. Per QQ-C-530	7. Per WW-T-799	11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	
4. Per QQ-B-750	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike		

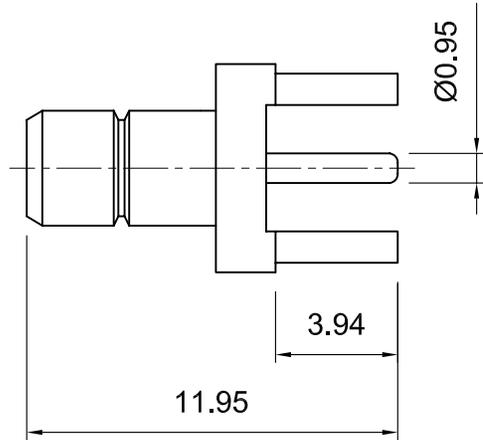

ITEM	MATERIAL	FINISH	Lighthouse Technologies, Inc.		
Connector Body	Brass, Note 1	Gold, Note 8	 4907 Morena Boulevard, #1411 San Diego, California 92117 Part Number: <b>LTI-SBSF54GT</b>		
Center Contact:	Brass, Note 1	Gold, Note 11			
Insulation	Teflon, Note 5	None	Description SMB PCB Jack, gold plated Brass Teflon dielectric		
Ferrule	--	--			
Gasket	--	--	Scale 3:1      Drawing No. SBSF54      File Name SBSF54		
Hex Nut	--	--			
Lock Washer	--	--			