


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

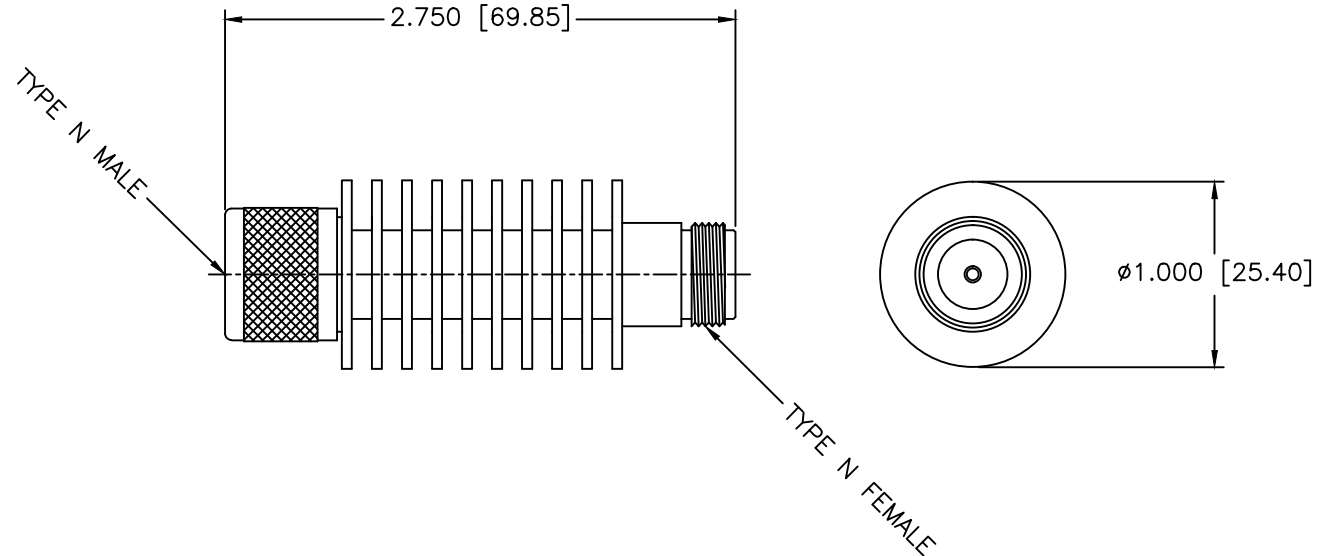

SPECIFICATIONS

Frequency Range: DC–2 GHz

VSWR: 1.15:1 Max.

Power: 20 Watts

Attenuation Value: 3dB to 20dB

Operating Temperature: –55°C to +85°C


Impedance: 50 ohms

Mechanical

Connector Shell: Stainless Steel

Connector Contact: Gold Plated Beryllium Copper

Housing: Aluminum

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A	
DRAWN: Paiboon Luekhamhan		DATE: 12-07-1997		DRAWING TITLE: 20 WATTS ATTENUATOR	
APPROVED: T. Nguyen		DATE: 12-07-1997		PART NO.: FAN-4	
THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5		SIZE: A	REV: N/A
				DO NOT SCALE THE DRAWING	
				DWG NO.: 80793	