
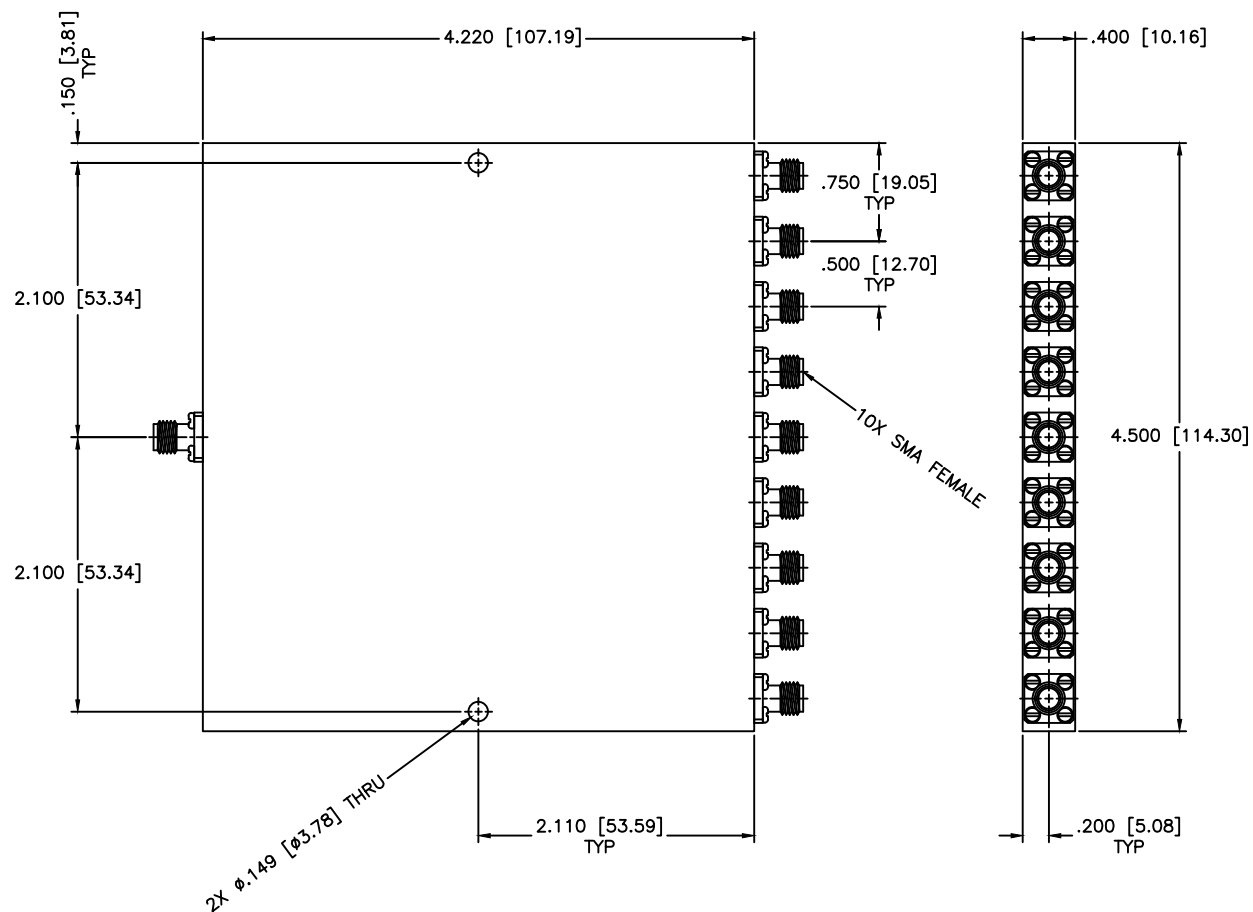


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED



SPECIFICATIONS

Frequency Range: 1–2 GHz
Insertion Loss: 1.4dB Max.
Isolation: 16dB Min.
VSWR: 1.60:1 Max.
Amplitude Balance: ± 0.8 dB
Input Power: 20 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°		SHEET: N/A	
DRAWN: Paiboon Luekhamhan		DATE: 12-06-2010		DRAWING TITLE: 9-WAY POWER DIVIDER	
APPROVED: T. Nguyen		DATE: 12-06-2010		PART NO. PS9-13/S	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5	
				SIZE: A	
				REV: N/A	
				DO NOT SCALE THE DRAWING	
				DWG NO. 85120	