



MMCX Jack Connector Solder Attachment Thru Hole PCB, .100 inch x .031 inch Hole Spacing

RF Connectors Technical Data Sheet

PE4904

Configuration

- MMCX Jack Connector
- BS EN 122340
- 50 Ohms
- Straight Body Geometry
- Thru Hole Interface Type
- Solder Attachment

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.22:1	
Operating Voltage (AC)			250	Vrms
Dielectric Withstanding Voltage (AC)			500	

Mechanical Specifications

Size

Length	0.295 in [7.49 mm]
Width/Dia.	0.138 in [3.51 mm]
Height	0.138 in [3.51 mm]
Weight	0.002 lbs [0.91 g]

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold 30μ in. minimum
Insulation	Teflon	
Body	Brass	Gold 3μ in. minimum

Environmental Specifications

Temperature

Operating Range	-55 to 155 deg C
-----------------	------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Jack Connector Solder Attachment Thru Hole PCB, .100 inch x .031 inch Hole Spacing PE4904](#)



MMCX Jack Connector Solder Attachment Thru Hole PCB, .100 inch x .031 inch Hole Spacing

RF Connectors Technical Data Sheet

PE4904

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

REACH Compliant

06/18/2012

Plotted and Other Data

Notes:


MMCX Jack Connector Solder Attachment Thru Hole PCB, .100 inch x .031 inch Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Jack Connector Solder Attachment Thru Hole PCB, .100 inch x .031 inch Hole Spacing PE4904](http://www.pasternack.com/mmex-jack-standard-thru-hole-pcb-connector-pe4904-p.aspx)

URL: <http://www.pasternack.com/mmex-jack-standard-thru-hole-pcb-connector-pe4904-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

MMCX Jack Connector Solder Attachment Thru Hole
PCB, .100 inch x .031 inch Hole Spacing

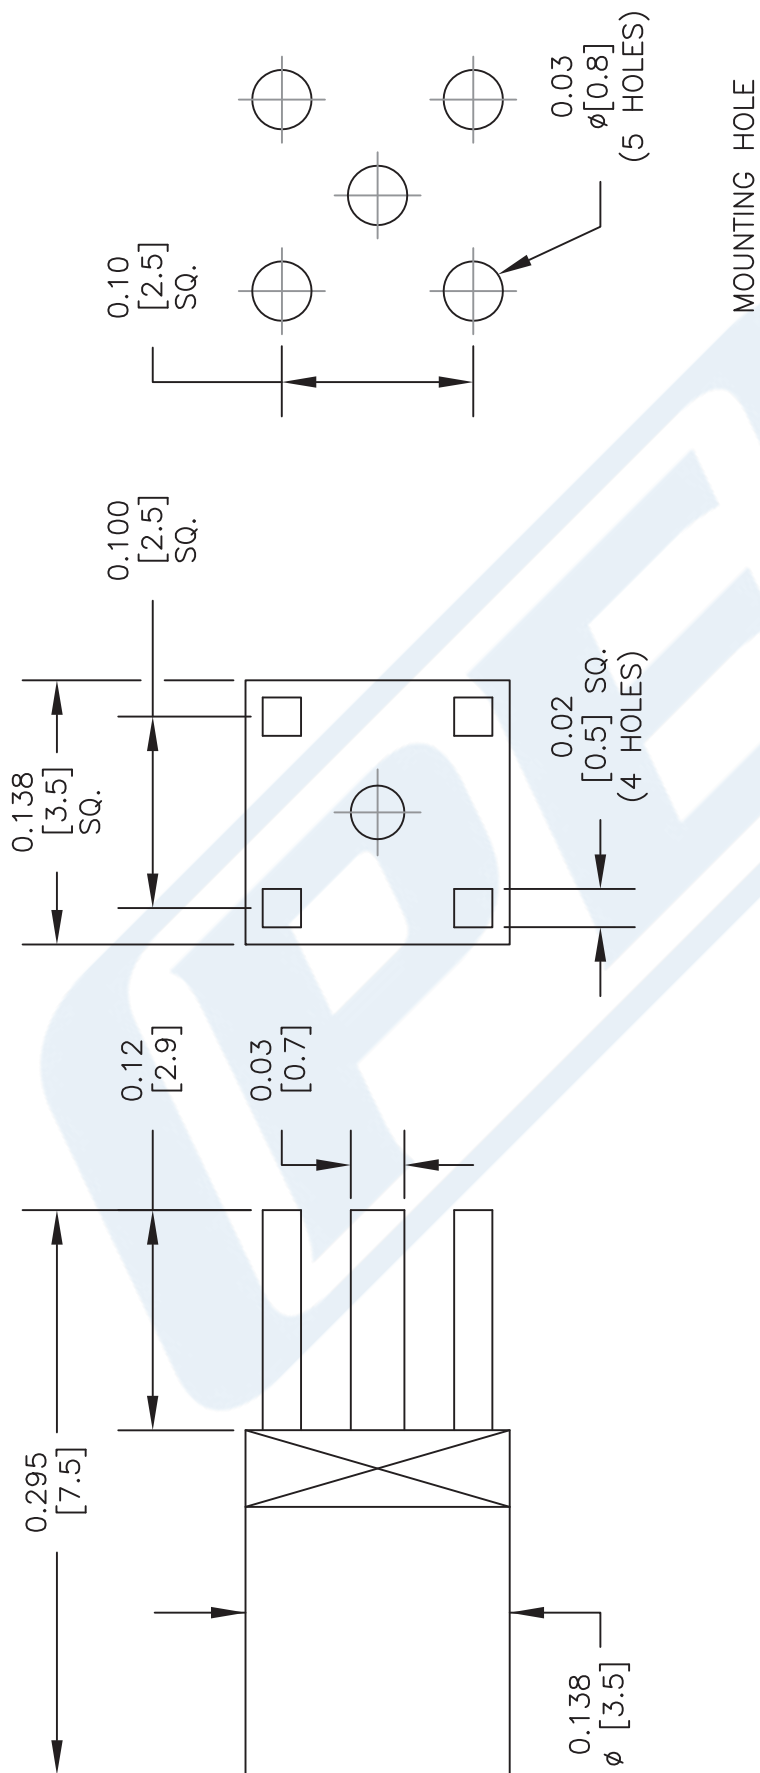

DWG TITLE

PE4904

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

FSCM NO. 53919

CAD FILE 110615

SCALE N/A

SIZE A

2233



PARNER
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com