


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

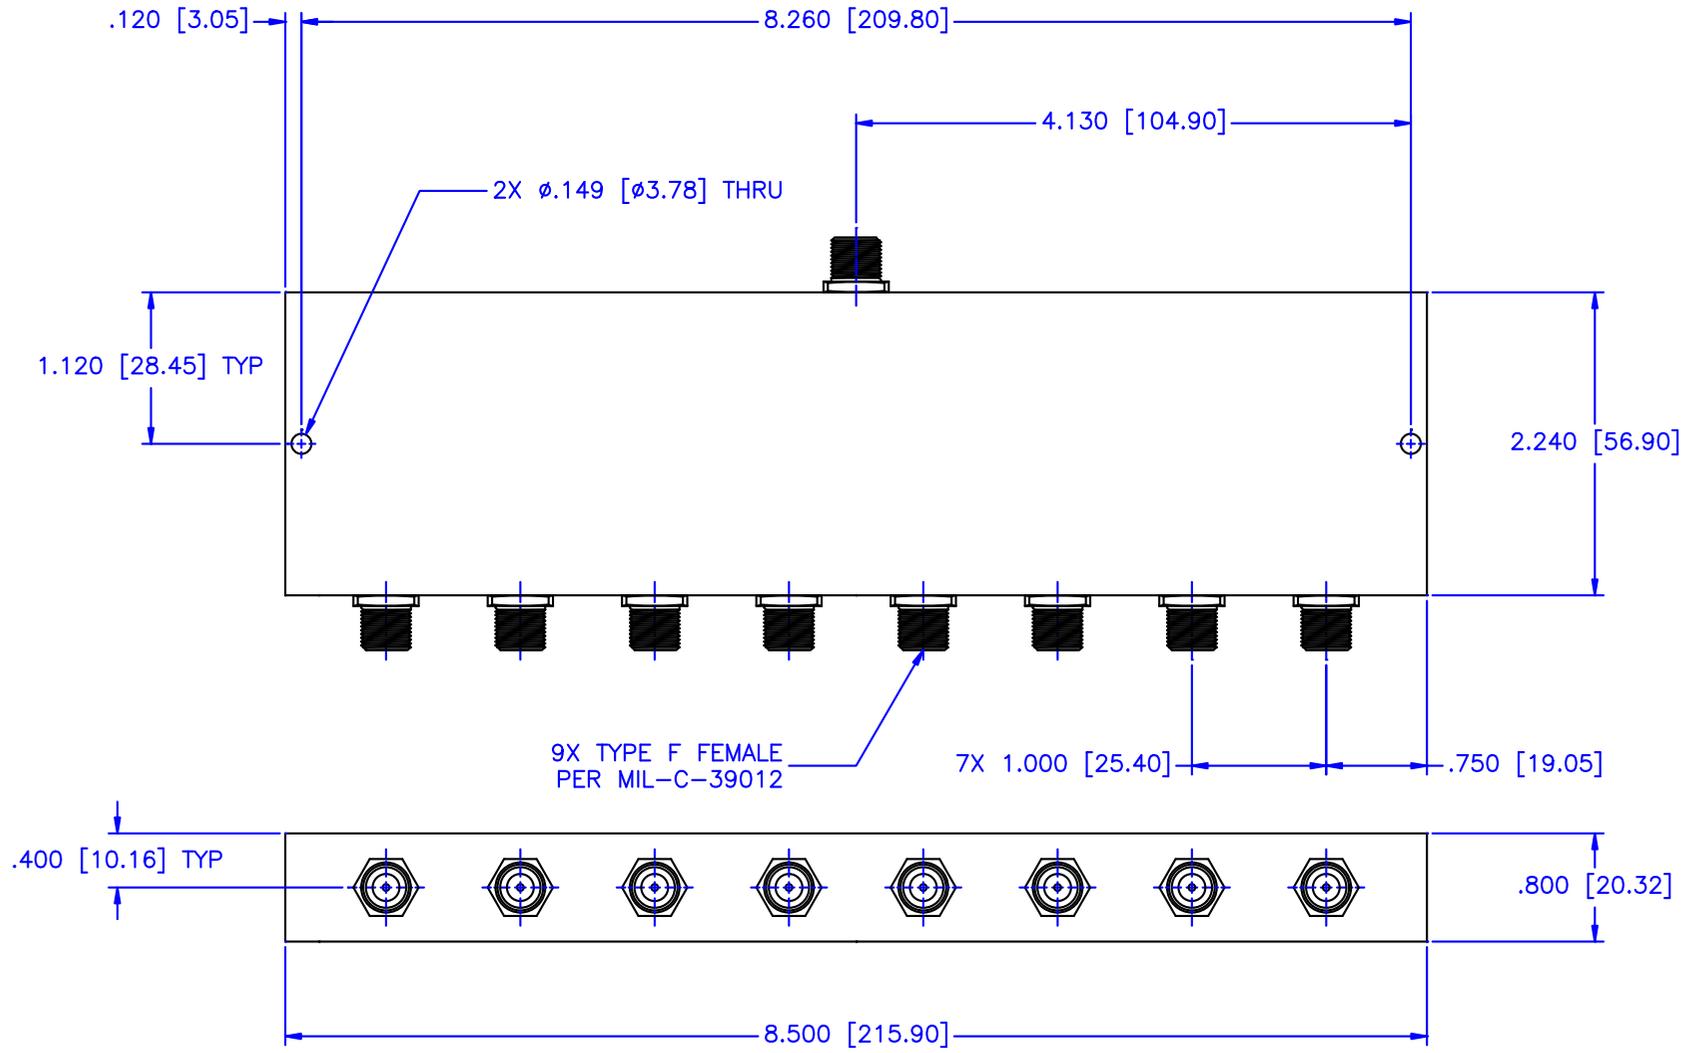

9X TYPE F FEMALE
PER MIL-C-39012

SPECIFICATIONS:

- Frequency Range: 950–1450 MHz
- Insertion Loss: 0.8dB Max.
- Isolation: 16dB Min.
- VSWR: 1.50:1 Max.
- Amplitude Balance: ±0.6dB
- Phase Balance: ±12° Max.
- Impedance: 75 Ohms

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE: N/A
			SHEET: N/A
DRAWING TITLE:		8-WAY POWER DIVIDER	
PART NO.:		PM8-40-75/FF	
DRAWN: Paiboon Luekhamhan DATE: 03-28-1998	APPROVED: T. Nguyen DATE: 03-28-1998	CAGE CODE: OD2L5 SIZE: N/A REV: A DWG NO.: 81025	UNLESS OTHERWISE SPECIFIED: TOLERANCES: IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°
PROPERTIES NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR REPRODUCED WITHOUT PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 	DO NOT SCALE THE DRAWING