


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

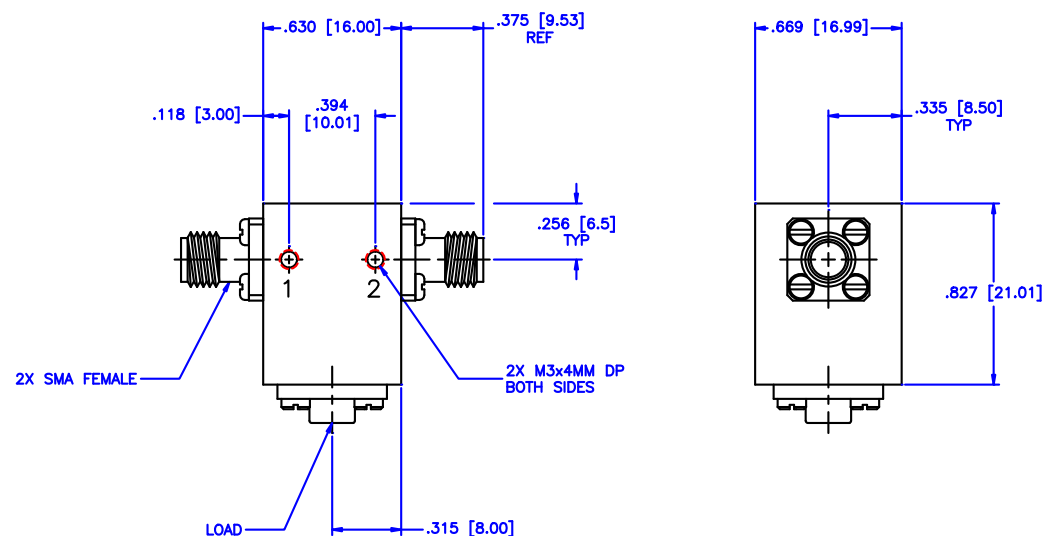

SPECIFICATIONS

Frequency Range: 7.5–15 GHz
Isolation: 16dB Min.
Insertion loss: 0.7dB Max.
VSWR: 1.40:1 Max.
Power Avg, Peak: 25W, 250W
Operating Temperature: –54°C to +85°C

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A	
DRAWN: Paiboon Luekhamhan		DATE: 08-06-2001		DRAWING TITLE: COAXIAL ISOLATOR		PART NO. IS-26	
APPROVED: T. Nguyen		DATE: 08-06-2001		CAGE CODE: 0D2L5		SIZE: N/A	
						REV: N/A	
						DWG NO. 82114	
						DO NOT SCALE THE DRAWING	