


SMN7106-D1C

200 kHz to 12 MHz

Surface Mount Noise Sources

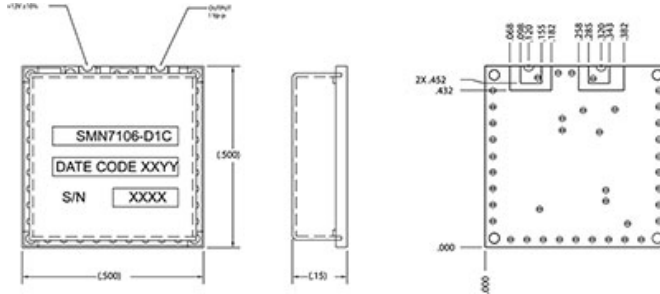

Specifications

RF Frequency	200 kHz to 12 MHz
Noise Output	95 dB Min ENR
Noise Spectral Density (N_0)	-79 dBm/Hz Min
Noise Power (N)	-8.3 dBm
Flatness	1 dB P-P Max
Peak Factor	5:01
Bias Voltage	12 V
Supply Current	35 mA Max
Impedance	50 ohms

Package and Connectivity

Construction	SMT 0.50 inch sq
--------------	------------------

Environmental

Operating Temperature	-55 to 85 °C
Storage Temperature	-55 to 125 °C

Notes



MERCURY COMMERCIAL ELECTRONICS

Microwave RF Components | Hudson, NH | (603) 546-4100 | rf.mrcy.com
 Specifications subject to change without notice

