



7/16 DIN Female Connector Threaded Pin Attachment 4 Hole
Flange Mount Pin Terminal, .975 inch Hole Spacing

TECHNICAL DATA SHEET

PE4574A

Configuration

Connector	7/16 DIN Female
Connector Specification	IEC 169-4
Connector Interface Type	Pin
Attachment Method (Shield/Contact)	Threaded Pin
Body Style	Straight
Mount Method	4 Hole Flange

Electrical Specifications

Frequency Range	DC to 7.5 GHz
Impedance	50 Ohms
Maximum VSWR	1.3:1
Maximum Operating Voltage	2,700 Volts
Dielectric Withstanding Voltage	4,000 Vrms

Mechanical Specifications

Temperature

Operating Range	-55 to +155 deg C
-----------------	-------------------

Size

Length	0.846 in [21.49 mm]
Width/Dia.	1.26 in [32.00 mm]
Weight	0.185 lbs [83.91 g]

Connector

Type	7/16 DIN Female
Contact Material and Plating	Brass, Gold
Body Material and Plating	Brass, Nickel
Dielectric Type	Teflon

Compliance Certifications (visit www.Pasternack.com for current document)


RoHS Compliant	
REACH Compliant	06/16/2014

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Female Connector Threaded Pin Attachment 4 Hole Flange Mount Pin Terminal, .975 inch Hole Spacing PE4574A](#)

PE4574A

PE4574A CAD Drawing

7/16 DIN Female Connector Threaded Pin Attachment 4 Hole
Flange Mount Pin Terminal, .975 inch Hole Spacing

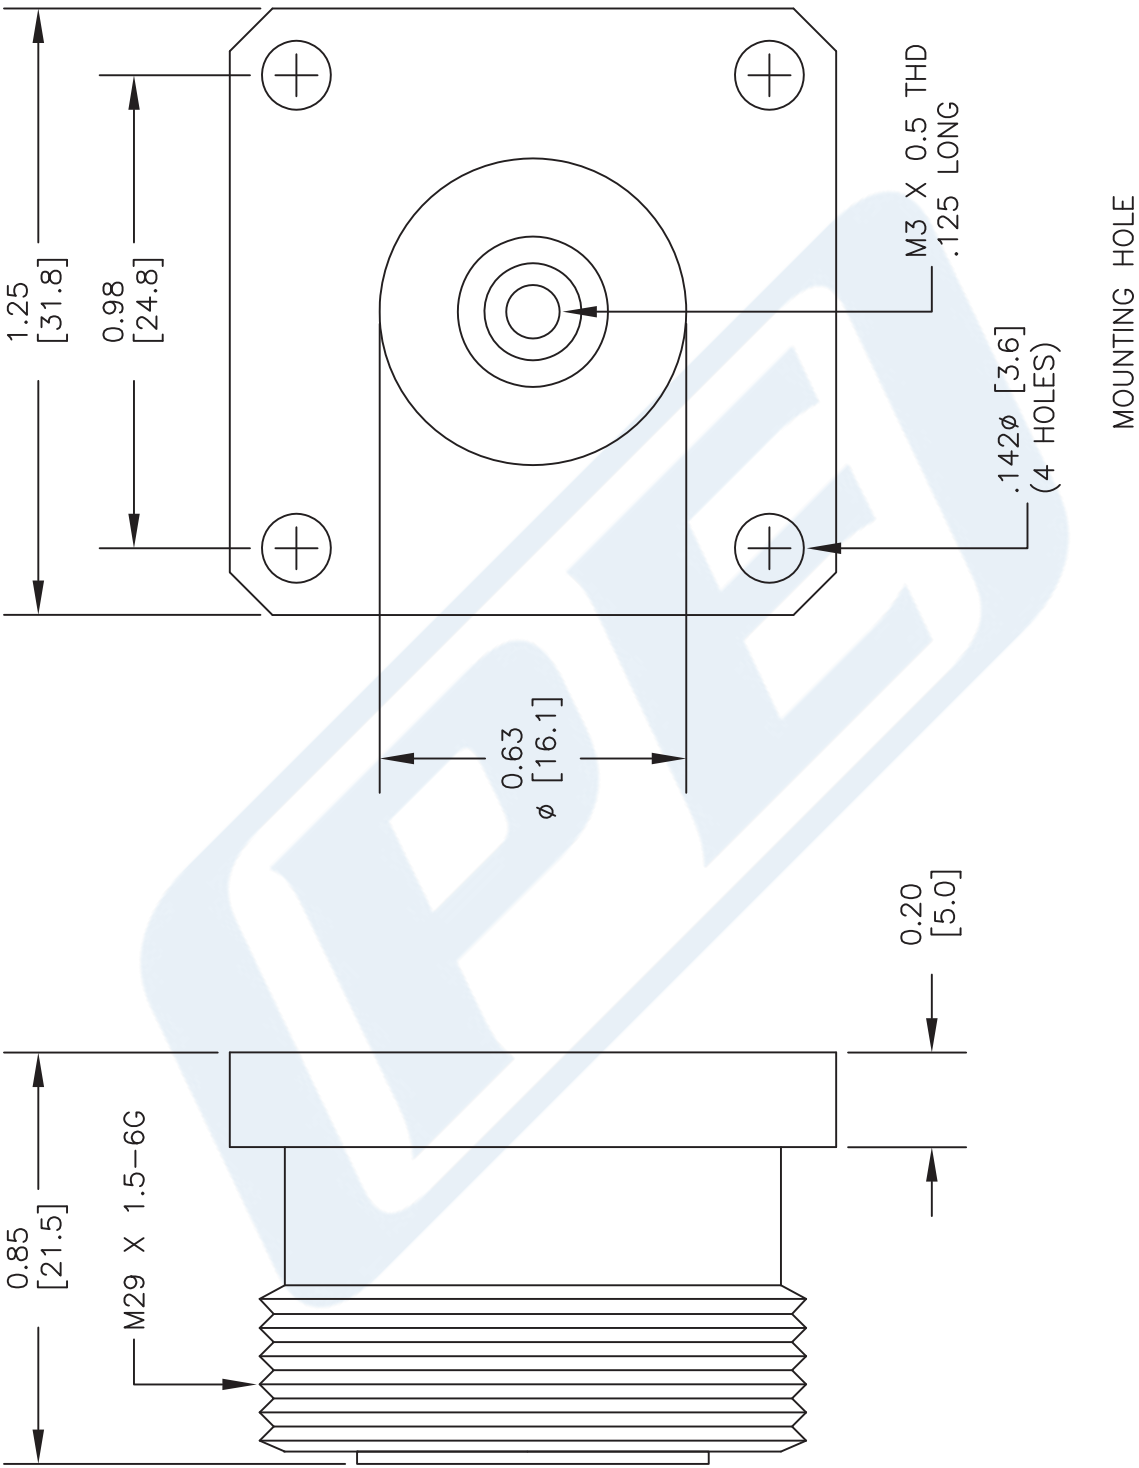

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE
PE4574A

FSCM NO. 53919

2233

PE PASTERNAK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com