



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com


Product Specifications Approval Sheet

Product Description : SAW Filter 1588.655 MHz SMD 1.4X1.1 mm

TST Part No.: TA1267A

Customer Part No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Bob Chau 

Approved by: _____ Francis Chen 

Date: _____ 1, 20, 2011

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 1588.655MHz

MODEL NO.:TA1267A

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: -30°C to +85°C
4. Storage Temperature: -40°C to +85°C

RoHS Compliant
Lead free
Lead-free soldering


B. ELECTRICAL CHARACTERISTICS:

Terminating source impedance : $Z_s = 50 \Omega$

Terminating load impedance : $Z_L = 50 \Omega$

Item	Unit	Min.	Type.	Max.	Note
Center Frequency	Fc MHz	-	1588.655	-	-
Insertion Loss (1573.42~1577.42 MHz)	IL dB	-	1.25	1.7	-
Insertion Loss (1571.42~1605.89 MHz)	IL dB		1.7	2.5	
Amplitude ripple (1573.42~1577.42 MHz)	dB	-	0.25	0.8	-
Amplitude ripple (1571.42~1605.89 MHz)	dB	-	0.7	1.5	
I/O VSWR (1573.42~1577.42 MHz)		-	1.2	2	-
I/O VSWR (1571.42~1605.89 MHz)		-	1.6	2	-
Attenuation					
D.C~824 MHz	dB	32	35	-	-
824~849 MHz	dB	32	35	-	-
849~880 MHz	dB	32	34.5	-	-
880~915 MHz	dB	32	34.5	-	-
915~1452 MHz	dB	30	34	-	-
1452~1525 MHz	dB	32	37	-	-
1710~1785 MHz	dB	32	36	-	-
1785~1850 MHz	dB	32	36	-	-
1850~6000 MHz	dB	25	36	-	-
Temperature Coefficient of Frequency	ppm/°C	-	-36	-	-


C.OUTLINE DRAWING:

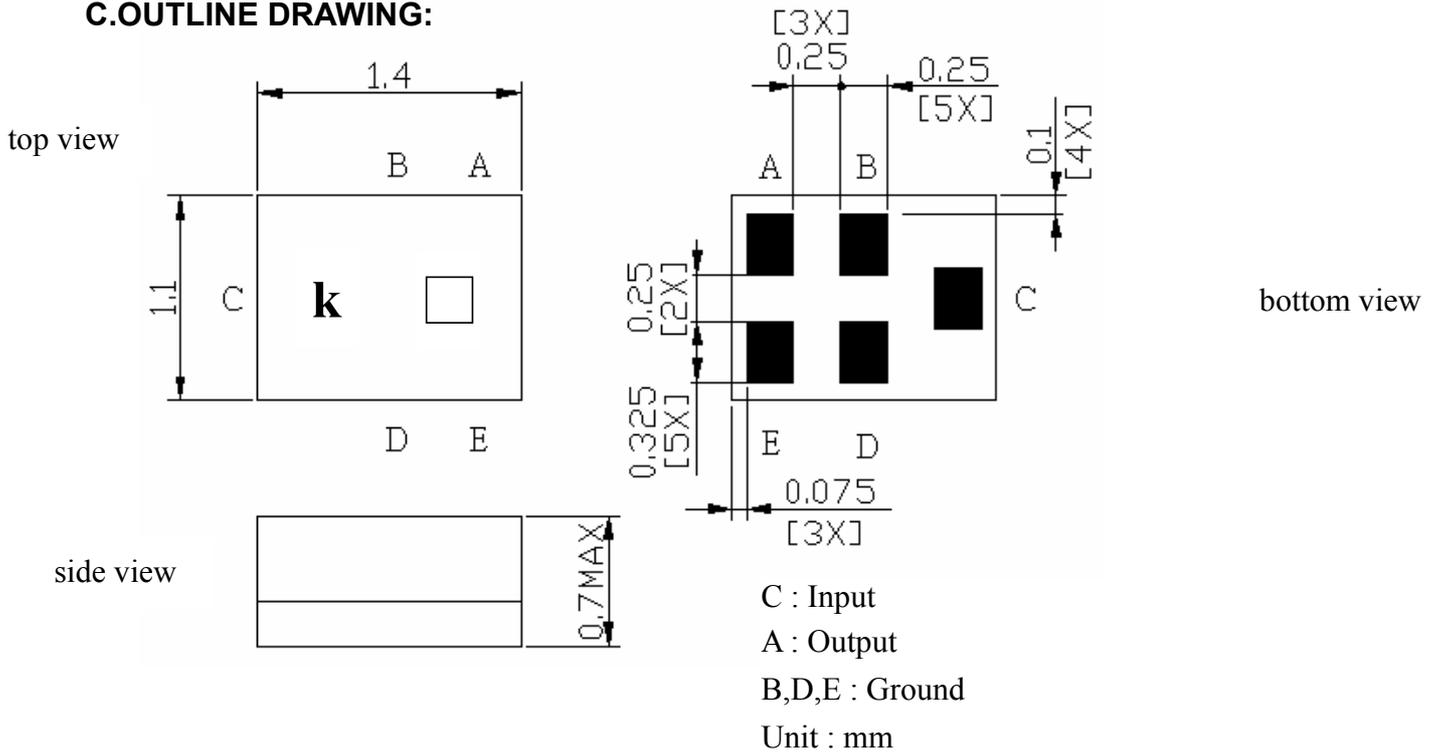


□ : Year/Month Code (Follow the table)

Year/Month	1	2	3	4	5	6	7	8	9	10	11	12
2009	A	B	C	D	E	F	G	H	J	K	L	M
2010	N	P	Q	R	S	T	U	V	W	X	Y	Z
2011	A	B	C	D	E	F	G	H	J	K	L	M
2012	N	P	Q	R	S	T	U	V	W	X	Y	Z
2013	A	B	C	D	E	F	G	H	J	K	L	M
2014	N	P	Q	R	S	T	U	V	W	X	Y	Z

D. MEASUREMENT CIRCUIT:

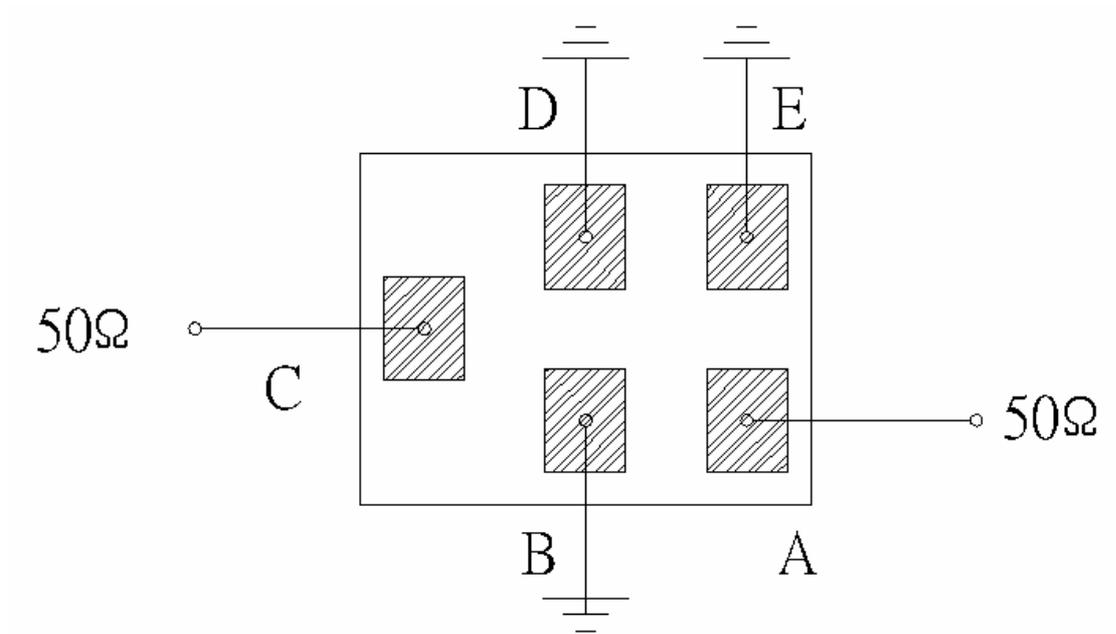




E. PCB Footprint:

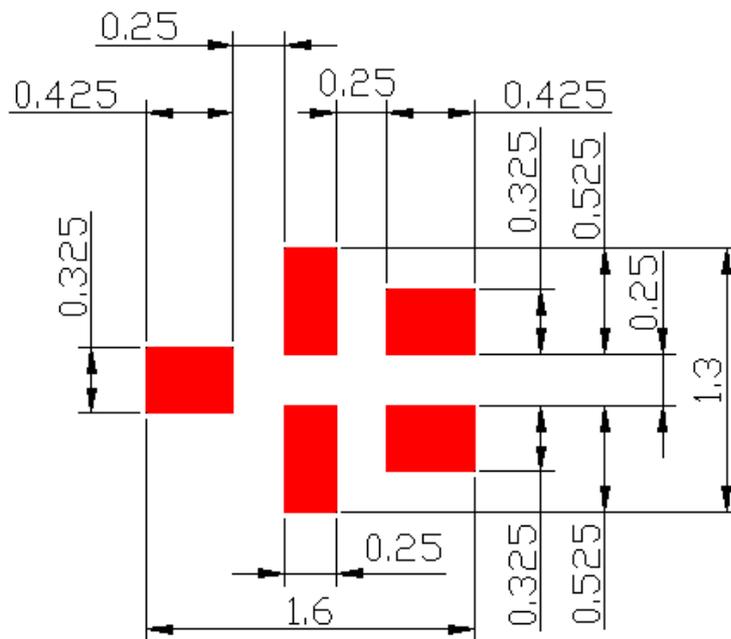

: Land Pattern


Unit : mm

F. Frequency Characteristics :

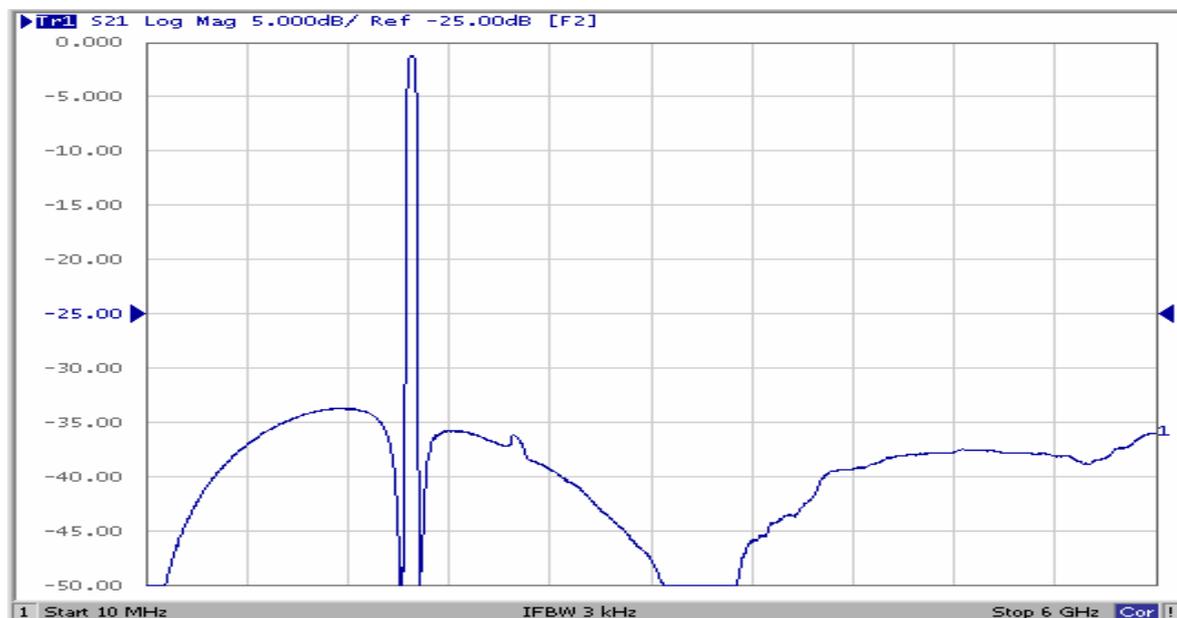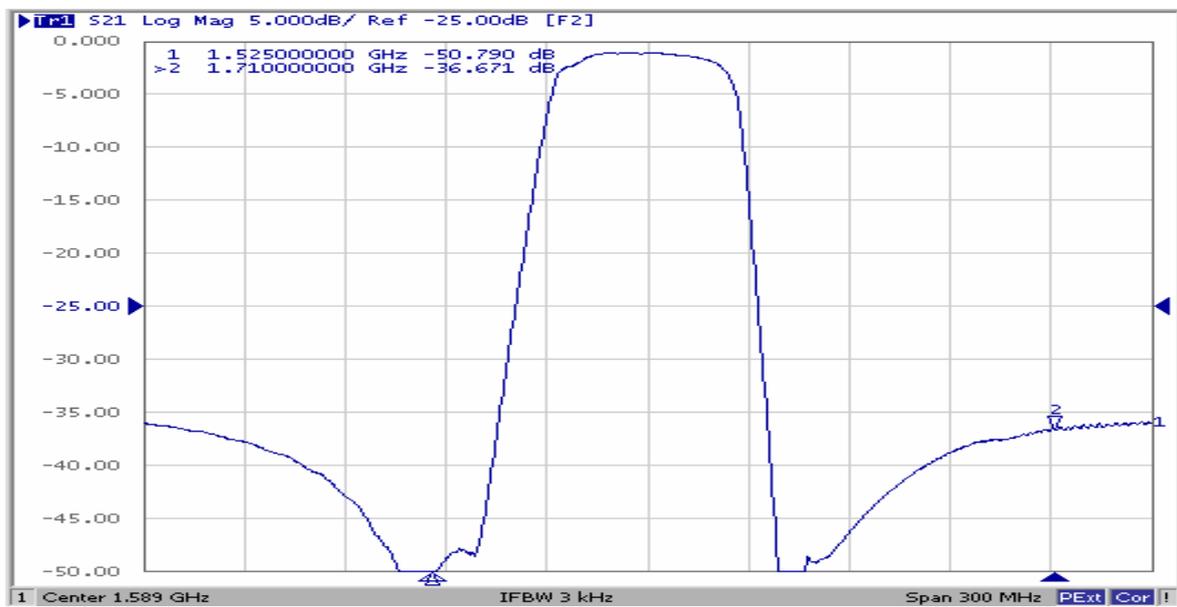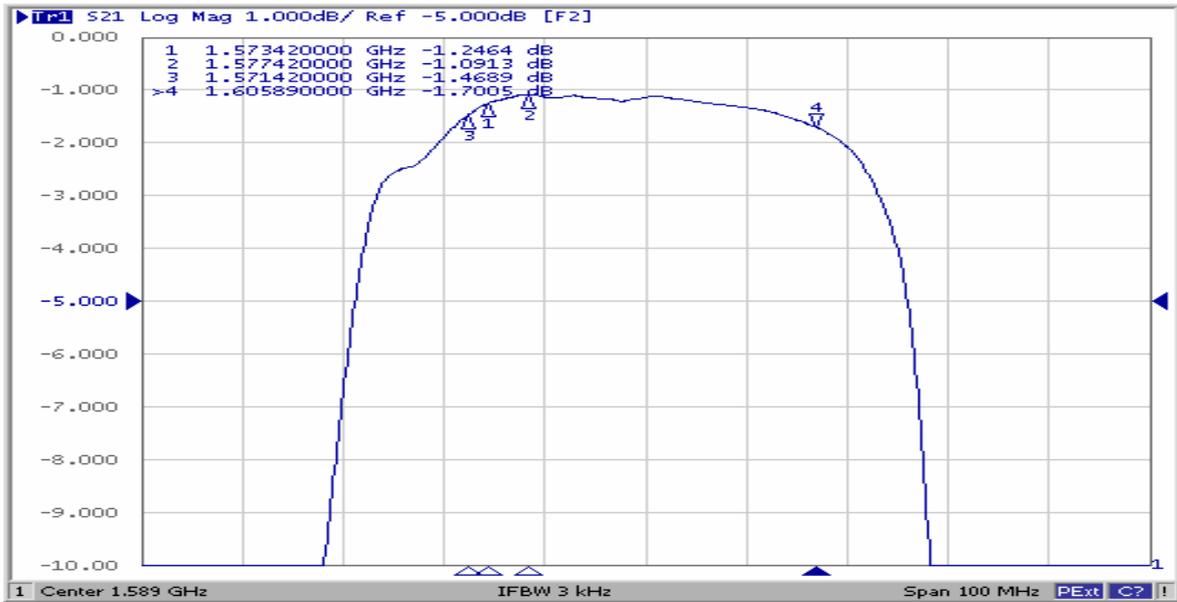


Reflection Functions :

S11

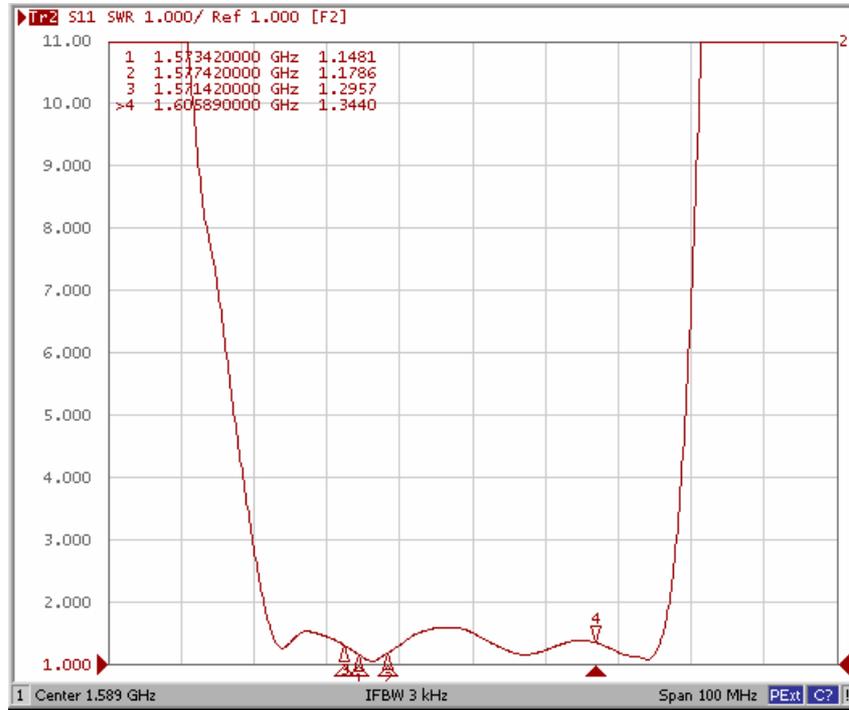


S22

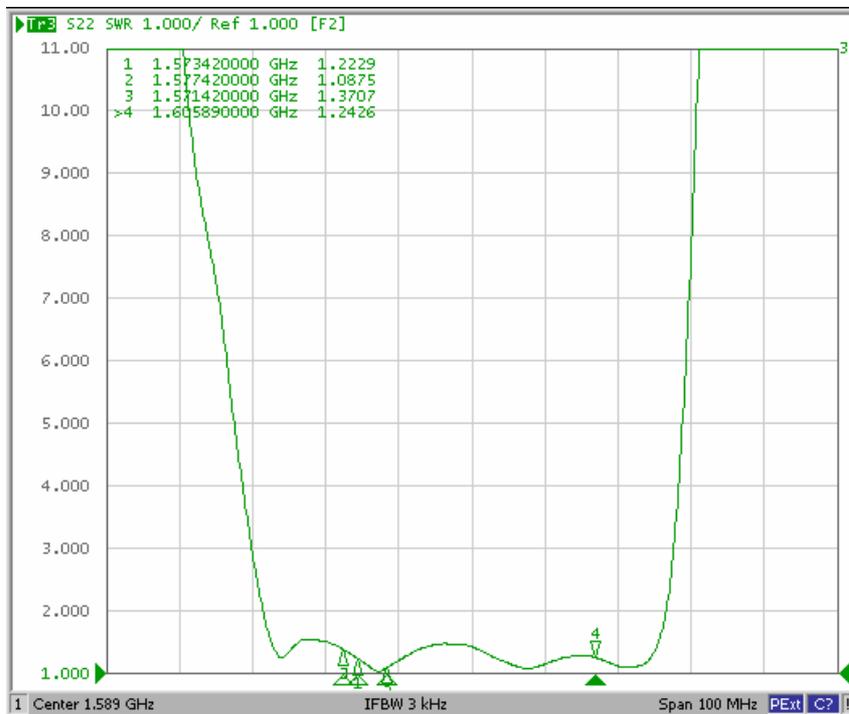


G. PACKING:

1. REEL DIMENSION

(Reel Count : 7"=2000)

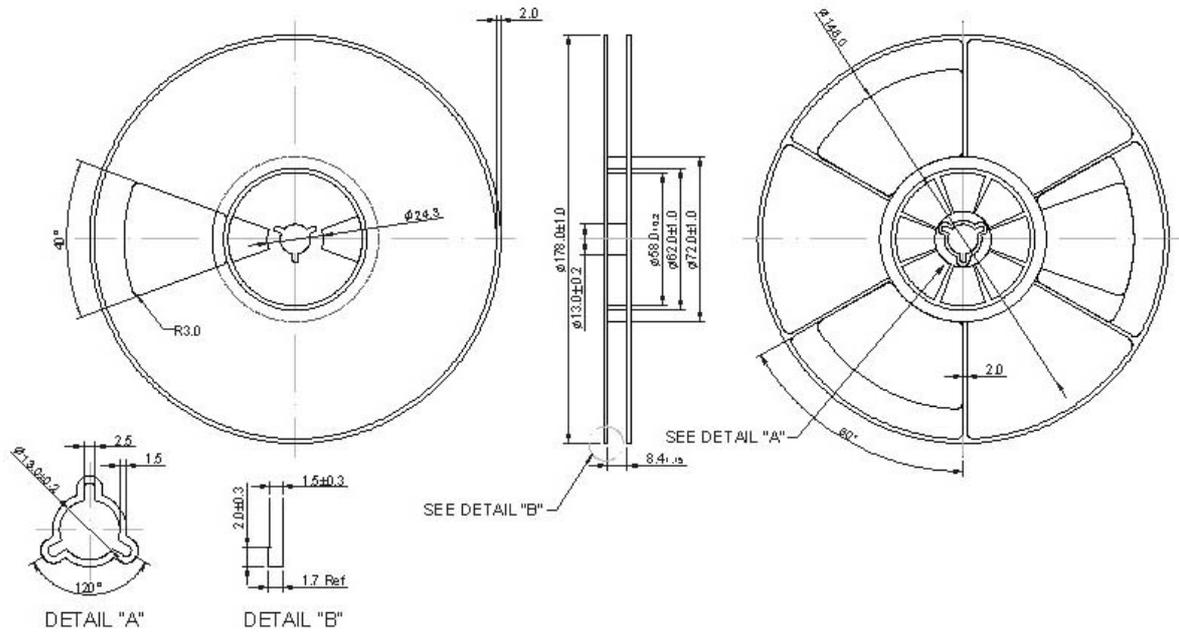

2. TAPE DIMENSION

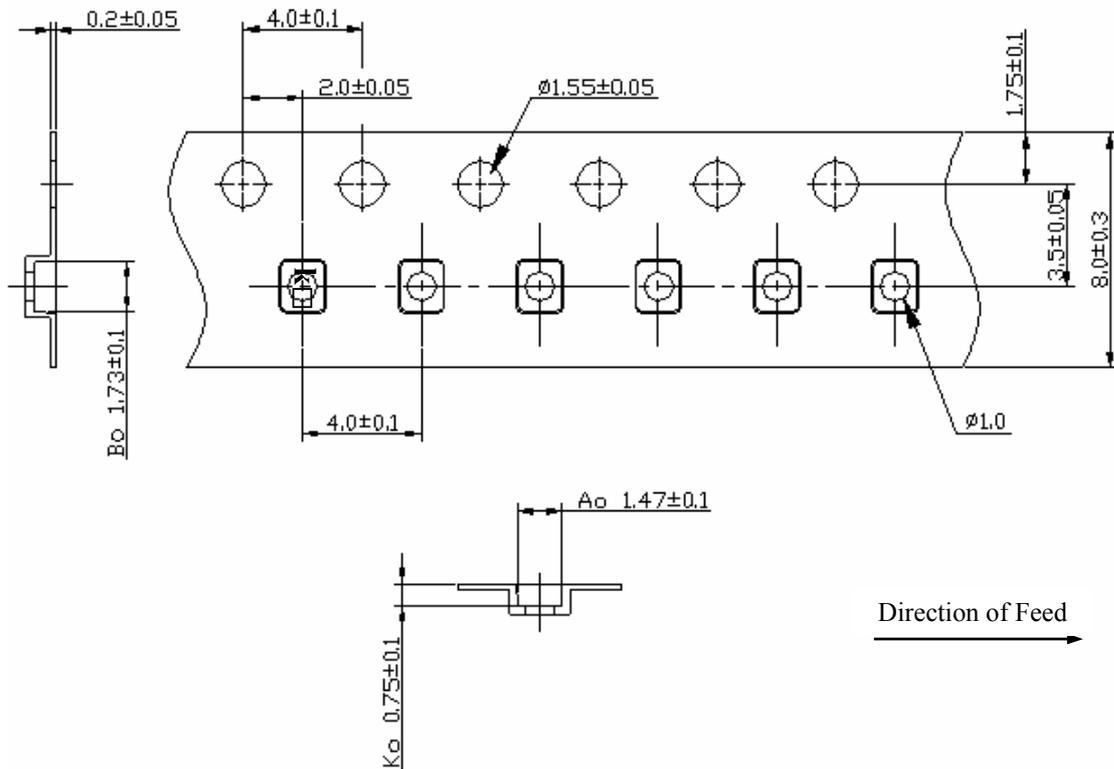

H. RECOMMENDED REFLOW PROFILE :

