


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

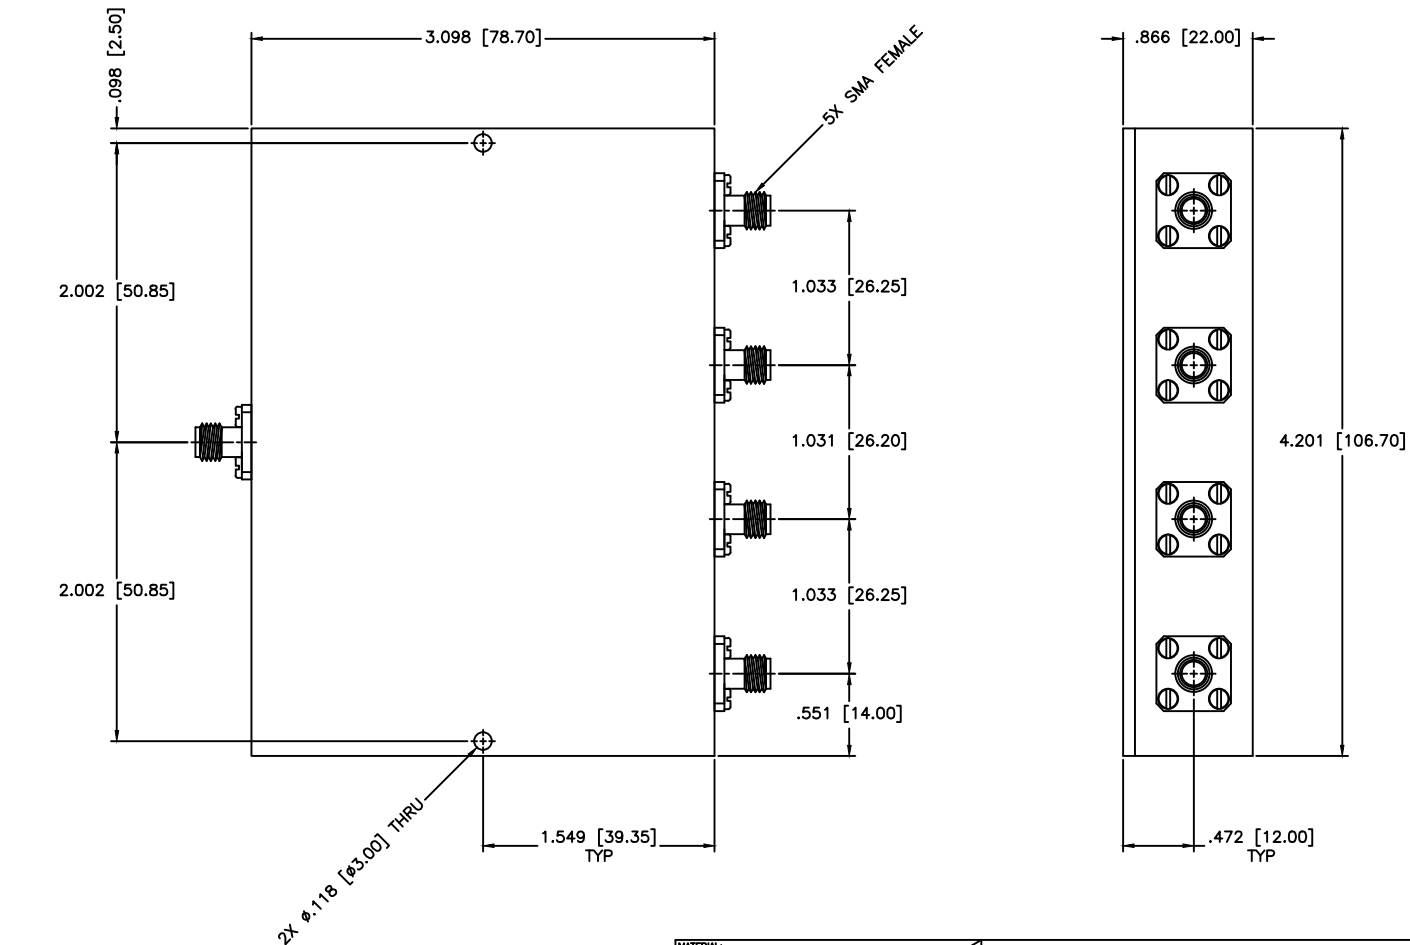

SPECIFICATIONS

Frequency Range: 800–2500 MHz
 Insertion Loss: 1.2dB Max.
 Isolation: 17dB Min.
 Power: 50 Watts
 VSWR: 1.40:1 Max.
 Operating Temperature: –35°C to +55°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-5254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 4-WAY POWER DIVIDER		
DRAWN: Palboon Luekhamhan DATE: 07-18-2006		PART NO.: PM4-114		
APPROVED: T. Nguyen DATE: 07-18-2006		CAGE CODE: OD2L5	SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING	DWG NO.: 82594