



90 Degree SMA Hybrid From 500 MHz to  
1,000 MHz Rated To 50 Watts

TECHNICAL DATA SHEET

PE2050

**90 Degree SMA Hybrid From 500 MHz to 1,000 MHz Rated To 50 Watts**

**Configuration**

Connector 1	SMA Female
Connector 2	SMA Female
Connector 3	SMA Female
Connector 4	SMA Female
Design	90 Degrees Hybrid

**Electrical Specifications**

Frequency Range, MHz	500 to 1,000
Phase Difference, Degrees	90
Impedance, Ohms	50
Isolation, dB	28
Maximum Insertion Loss, dB	3.1
Maximum Input Power, Watts	50
Maximum Input VSWR	1.1:1
Peak Power, KWatts	3
Coupling Value, dB	3
Coupled Loss, dB	0.1
Frequency Sensitivity, dB	0.5

**Mechanical Specifications**

**Size**

Length, in [mm]	3.06 [77.72]
Width, in [mm]	1.25 [31.75]
Height, in [mm]	0.4 [10.16]

**Connector 1**

Type	SMA Female
------	------------

**Connector 2**

Type	SMA Female
------	------------

**Connector 3**

Type	SMA Female
------	------------

**Connector 4**

Type	SMA Female
------	------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [90 Degree SMA Hybrid From 500 MHz to 1,000 MHz Rated To 50 Watts PE2050](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



90 Degree SMA Hybrid From 500 MHz to  
1,000 MHz Rated To 50 Watts

TECHNICAL DATA SHEET

PE2050

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level

90 Degree SMA Hybrid From 500 MHz to 1,000 MHz Rated To 50 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [90 Degree SMA Hybrid From 500 MHz to 1,000 MHz Rated To 50 Watts PE2050](http://www.pasternack.com/hybrid-directional-3-db-sma-coupler-500-1000-mhz-50-watts-pe2050-p.aspx)

URL: <http://www.pasternack.com/hybrid-directional-3-db-sma-coupler-500-1000-mhz-50-watts-pe2050-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE2050 CAD Drawing

90 Degree SMA Hybrid From 500 MHz to 1,000 MHz Rated To 50 Watts

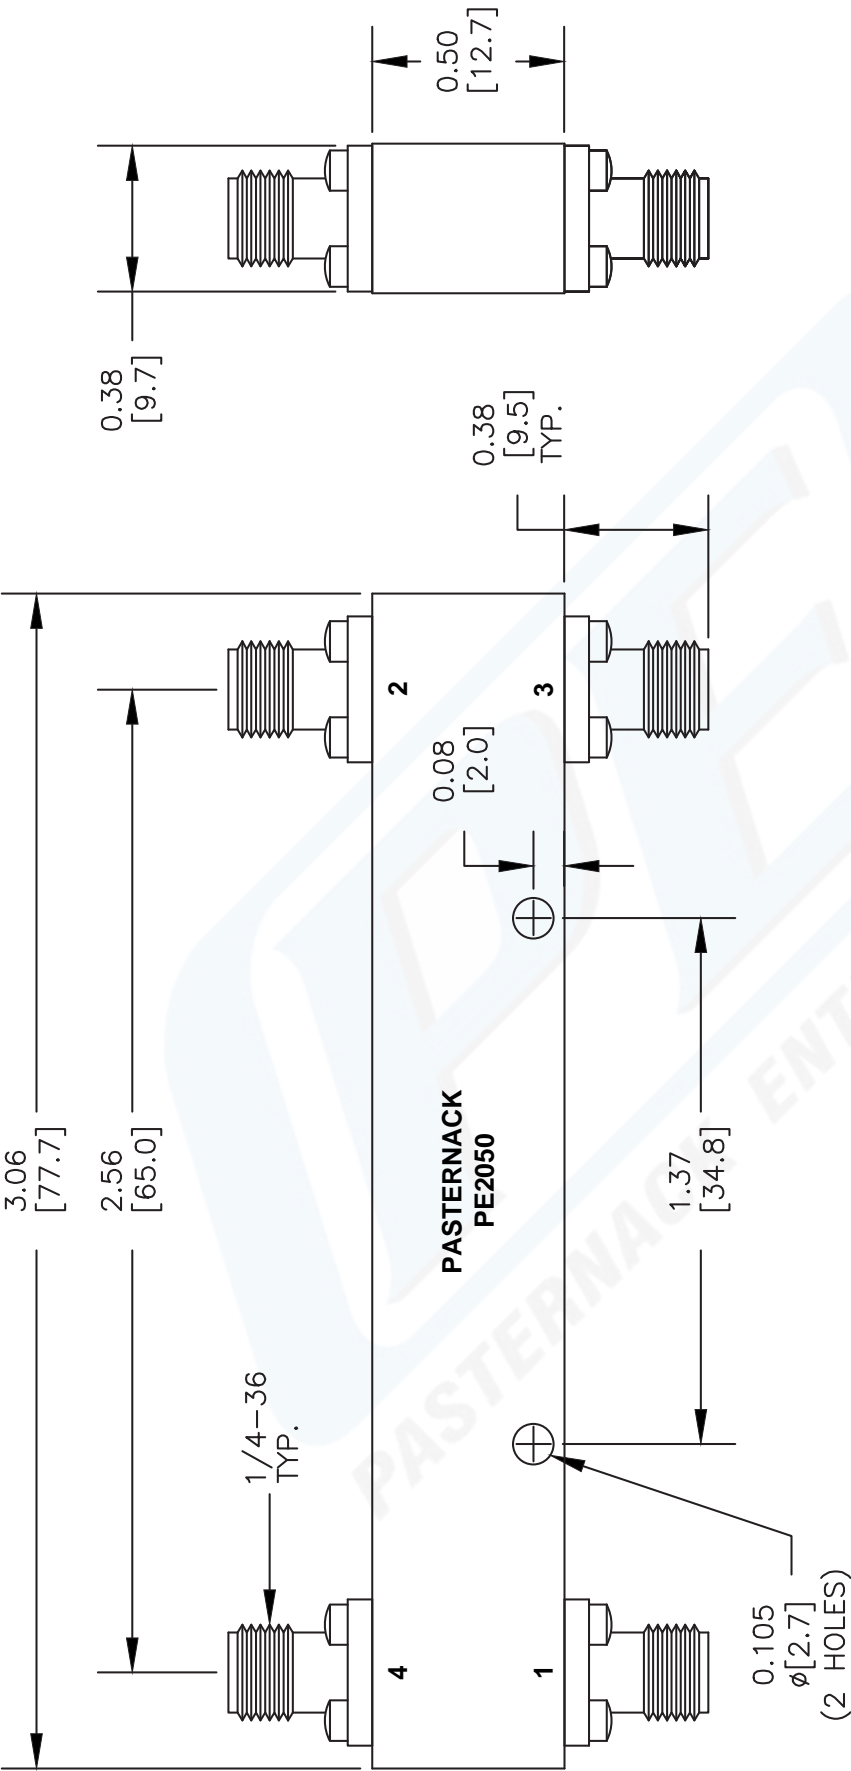

PORT CONFIGURATION			
INPUT	90° OUTPUT	0° OUTPUT	ISOLATED
1	4	2	3

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE2050**

REV. A  
**FSCM NO. 53919**

CAD FILE  
092607-A  
SCALE  
N/A  
SIZE  
A  
127

**PASTERNAK**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com