



RF-LAMBDA

The power beyond expectations

RHPF23G06G22

SSS HIGH PASS FILTER 6.5-22GHz

Summary:

- SSS Filter - Suspended Substrate Stripline Filter
- Wide bandwidth and 3 dB BW Available from 5-50% (f_0)
- Flat frequency response and low insertion loss..
 - Covers the 1 GHz to 18 GHz Frequency Range
 - Designs that Cover up to 40 GHz Also Available
- MIL-E-5400 standard




Environmental Specifications:

Operational Temp. Range: -55°C~+85°C

Storage Temp. Range: -55°C~+100°C

Pass Band (GHz)	Insertion Loss (dB)	VSWR	Pass Band Ripple(dB)	Attenuation(dB)	Connector	Power (W)
6.5-22	1.00	1.80	1.0	50@DC-1.96GHZ	SMA-F	30

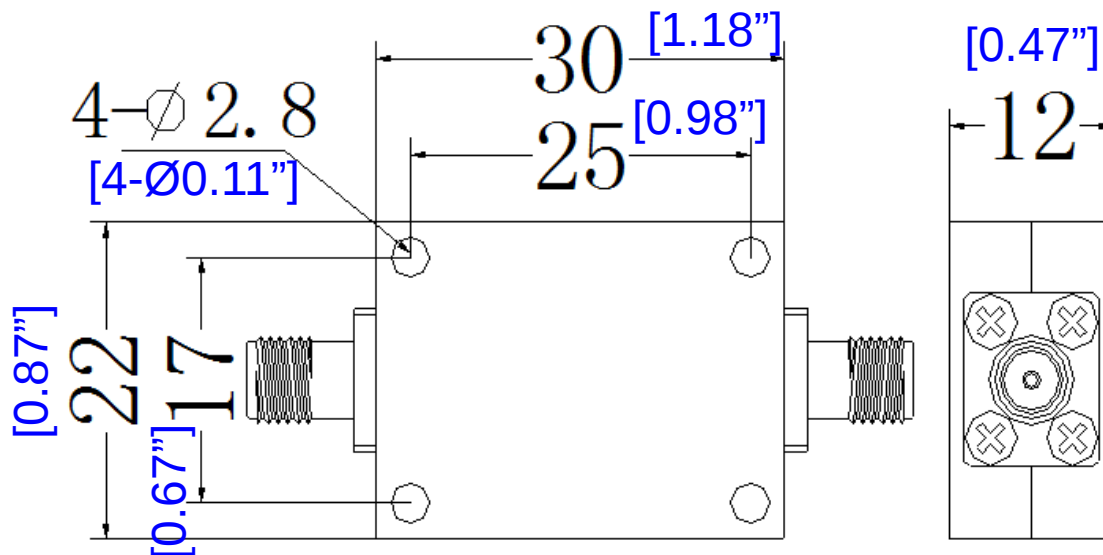

High Pass Suspended Substrate Stripline Filter 6.5-22GHz