REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

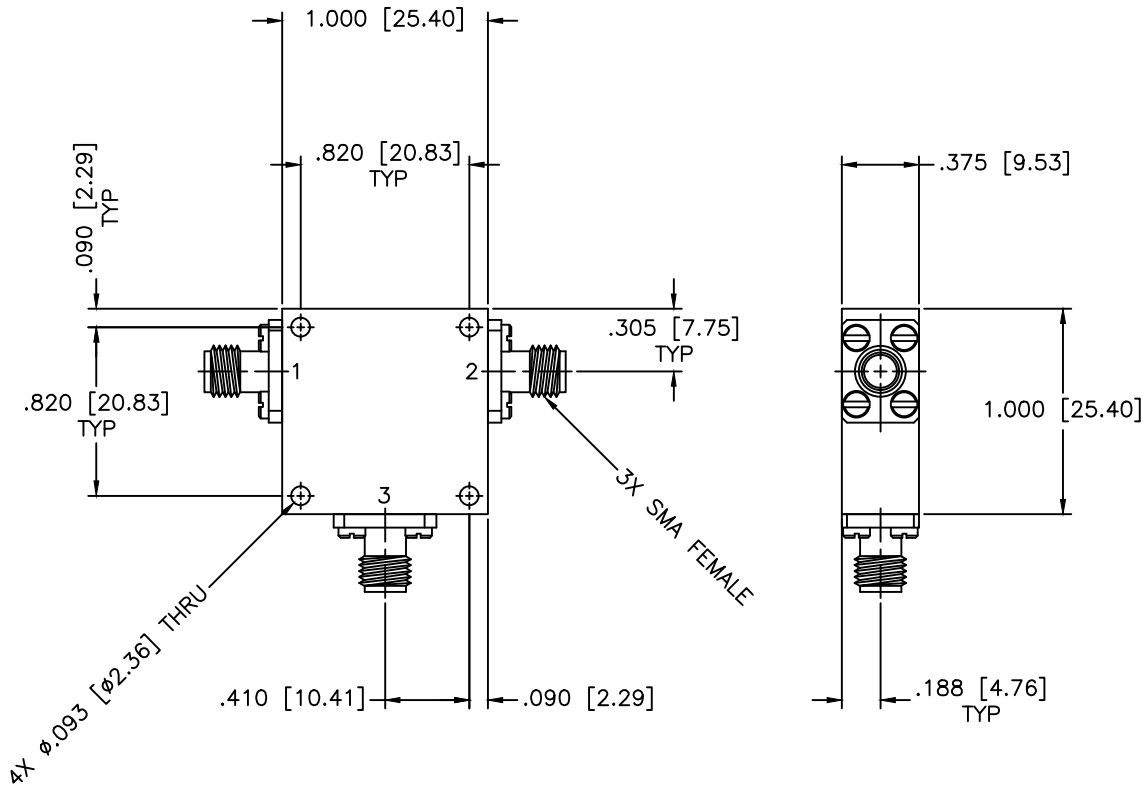

SPECIFICATIONS

Frequency Range:	0.82–0.86 GHz
Isolation:	20dB Min.
Insertion loss:	0.30dB Max.
VSWR:	1.22:1 Max.
Power:	25W Avg, 250W Peak
Operating Temperature:	−54°C to +85°C

MATERIAL:

DRAWN: Païboon Luekhamhan — DATE: 05-24-2010

APPROVED: T. Nguyen — DATE: 05-24-2010

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
hhtp://WWW.MCLI.COM

SCALE: N/A
SHEET: N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

DRAWING TITLE: COAXIAL CIRCULATOR

PART NO. CS-36

CAGE CODE: 0D2L5

SIZE: N/A — REV: N/A

DO NOT SCALE THE DRAWING

DWG NO. 84875