

Coaxial

Adapter, SMA-M to BNC-F

50 Ω

DC to 2 GHz

SM-BF50+



CASE STYLE: DJ1024

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Features

- flat response
- excellent VSWR
- low cost adapters, available from stock
- brass body, nickel plated

Applications


- interconnection of RF cables and equipment
- testing

Connectors	Model	Price	Qty.
Conn1 SMA-M	Conn2 BNC-F	SM-BF50+	\$3.95 ea. (1-49)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

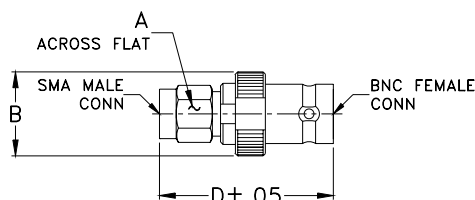

Outline Dimensions (inch/mm)



A	B	C	D	E	wt
.312	.53	--	1.10	--	grams
7.92	13.46	--	27.94	--	8.6

Electrical Specifications T_{AMB}=25°C

FREQUENCY (GHz)	INSERTION LOSS (dB)	VSWR (:1) Max.
f_L - f_U	Typ.	DC-2 GHz
DC-2	0.05	1.20

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	
		SMA-M	BNC-F
1.00	0.00	1.00	1.00
10.00	0.00	1.00	1.00
20.00	0.00	1.00	1.00
40.00	0.01	1.00	1.01
50.00	0.01	1.00	1.01
60.00	0.01	1.00	1.01
70.00	0.01	1.00	1.01
80.00	0.01	1.00	1.01
90.00	0.01	1.00	1.01
100.00	0.02	1.00	1.01
200.00	0.02	1.00	1.01
400.00	0.03	1.01	1.02
600.00	0.04	1.01	1.03
800.00	0.05	1.01	1.04
1000.00	0.04	1.01	1.05
1200.00	0.05	1.01	1.05
1400.00	0.05	1.01	1.06
1600.00	0.06	1.02	1.07
1800.00	0.05	1.02	1.07
2000.00	0.07	1.03	1.08

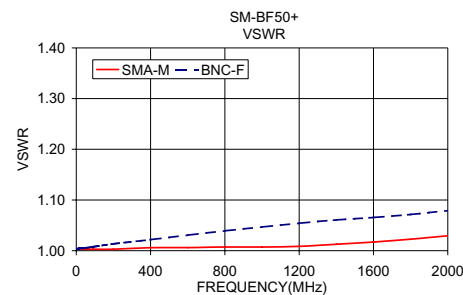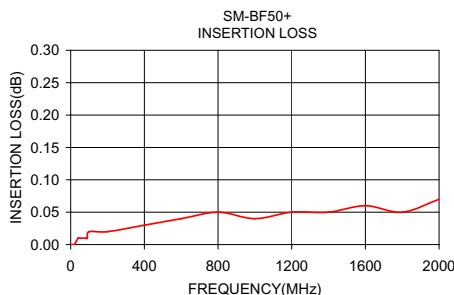

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M98898
SM-BF50+
ED-11362/4
RS/TD/CP/AM
130913
Page 1 of 1