
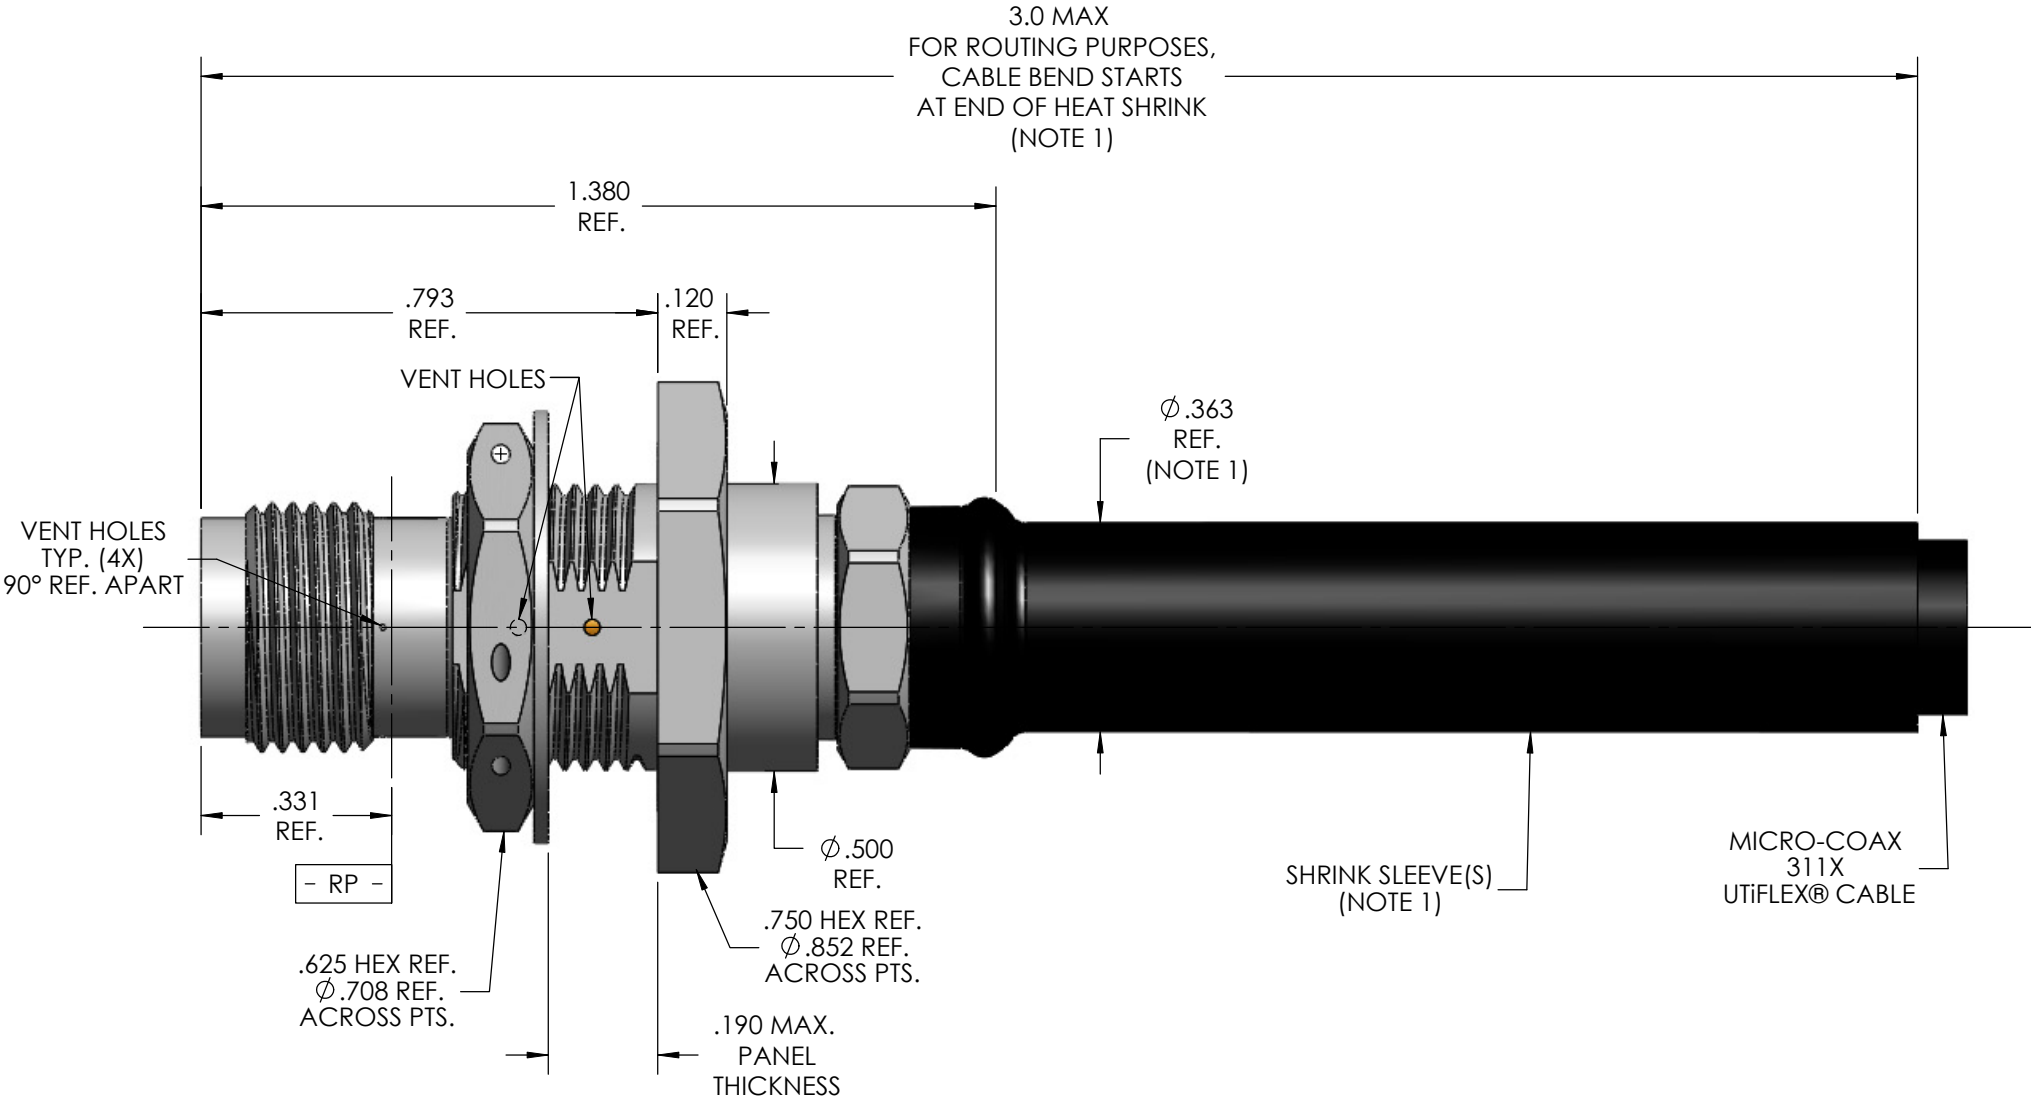
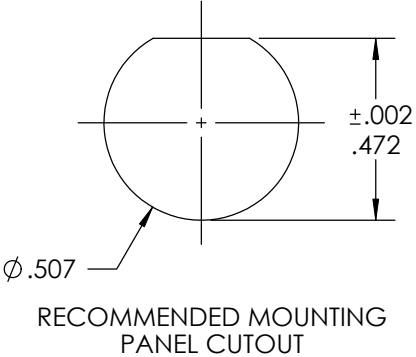



MECHANICAL CHARACTERISTICS	
INTERFACE	MIL-STD-348, FIGURE 313-4
SLANT SHEET	N/A
RECOMMENDED MATING TORQUE	15 IN-LBS NOM.
FORCE TO ENGAGE	2 LBS. MAX.
FORCE TO DISENGAGE	2 LBS. MIN.
DURABILITY	500 CYCLES MIN.
AXIAL CONTACT RETENTION	6 LBS. MIN. (BOTH DIRECTIONS)
CABLE RETENTION	20 LBS. MIN.
MASS	21.81 GRAMS NOM.
RECOMMENDED JAM NUT TORQUE	35 -40 IN-LBS.
ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	18 GHz
VSWR DC - 2 GHz	1.09:1 MAX.
VSWR 2 GHz - 4 GHz	1.12:1 MAX.
VSWR 4 GHz - 16 GHz	1.16:1 MAX.
VSWR 16 GHz - 18 GHz	1.20:1 MAX.
INSERTION LOSS	0.04 √F (GHz) dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	1775 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 18 GHz	-80 dB
CORONA	450 Vrms MIN. @ 70,000 FEET
RF HIGH POTENTIAL	1175 Vrms MIN.
CONTACT RESISTANCE (INNER)	4.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	2.0 MilliOhms MAX.
ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-100 °C TO 150 °C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION D
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%
MATERIALS AND FINISH	
BODY, CLAMP NUT, WASHER & LOCKNUT	STEEL, CORROSION RESISTANT, ASTM-A-582, UNS NO. S30300, PASSIVATED PER ASTM-A-967
CONTACT & CONTACT RING	BERYLLIUM COPPER, ASTM-B-196, GOLD PLATED PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290
DIELECTRIC BEAD & DIELECTRIC STOP	POLYETHERIMIDE THERMOPLASTIC, PER ASTM-D-5205
INSULATOR	TFE FLUOROCARBON, PER ASTM-D-1710
APPLICATION	
CABLE(S)	311X
INSTALLATION	PER CONFIGURATOR
CONNECTOR CODE SHEET 1	62V
CONNECTOR CODE SHEET 2	6TV

THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.

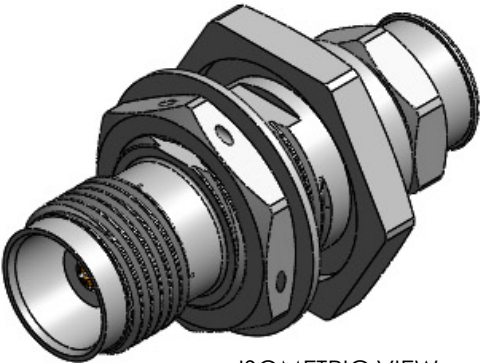

- NOTE:
1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.
 2. ALL SPECIFICATIONS LISTED ON THIS DRAWING WILL ALSO APPLY TO CONNECTOR 905081-EM (EQUIPMENT MODEL).
 3. SEE SHEET 2 FOR HEAT SHRINK FORMED ELBOW CONFIGURATION.

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.		INITIALS		DATE		<div>MICRO-COAX</div> <div>PROVEN RELIABLE</div>					
		DWN.	BDD	8/17/10							
		CHKD.	CCF	1/31/13							
TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE TNCA BULKHEAD JACK, 311X, VENT HOLES, SAFETY WIRE, SPACE GRADE									
.XX	± .02	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.			FSCM NO.	SIZE	SCALE	SHEET NO.	DRAWING NO.	REV	
.XXX	± .005				64639	B	3:1	1 OF 2	SD905081	C1	
.XXXX	± .0010										
ANGLES	± 2°										

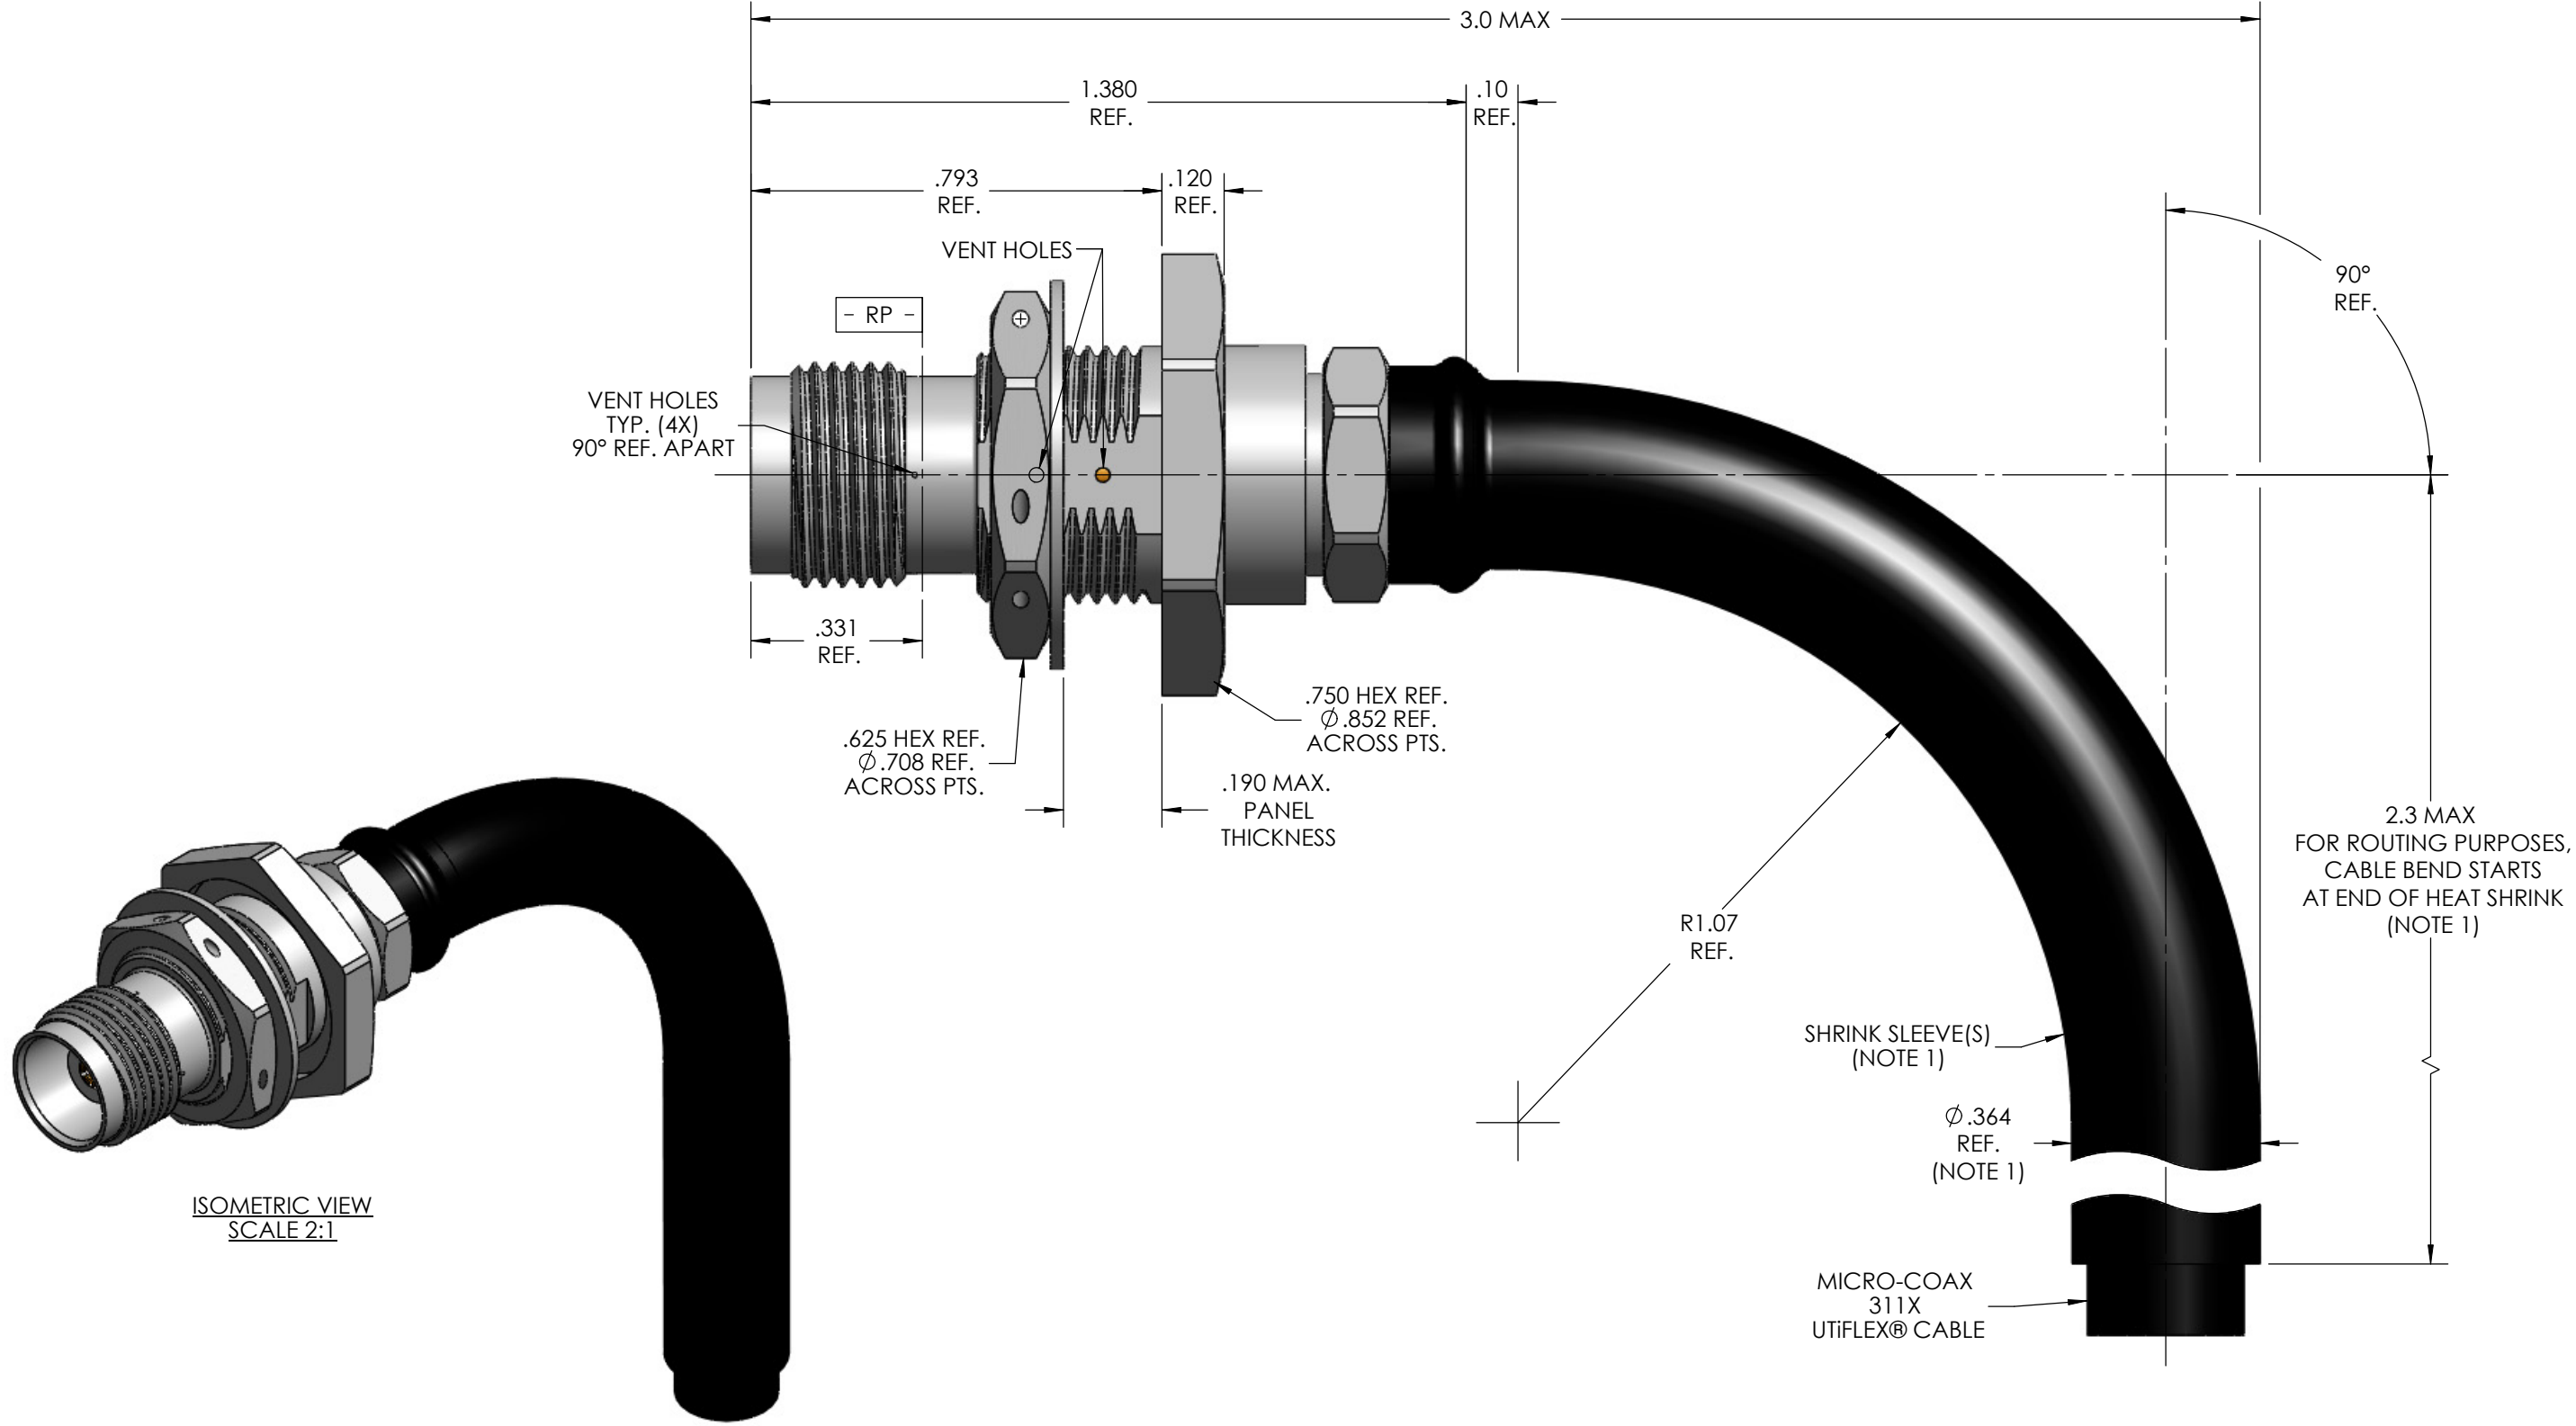

NOTE:
1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

ALL DIMENSIONS AND TOLERANCES IN INCHES UNLESS OTHERWISE SPECIFIED.		INITIALS		DATE		<div>MICRO-COAX</div> <div>PROVEN RELIABLE</div>			
		DWN.	BDD	8/17/10					
		CHKD.	CCF	1/31/13					
		APPVD.							
.XX	± .02	TITLE		TNCA BULKHEAD JACK, 311X, VENT HOLES, SAFETY WIRE, HEAT SHRINK FORMED ELBOW, SPACE GRADE					
.XXX	± .005								
.XXXX	± .0010								
ANGLES	± 2°								
				FSCM NO.	SIZE	SCALE	SHEET NO.	DRAWING NO.	REV.
				64639	B	3:1	2 OF 2	SD905081	C1