


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

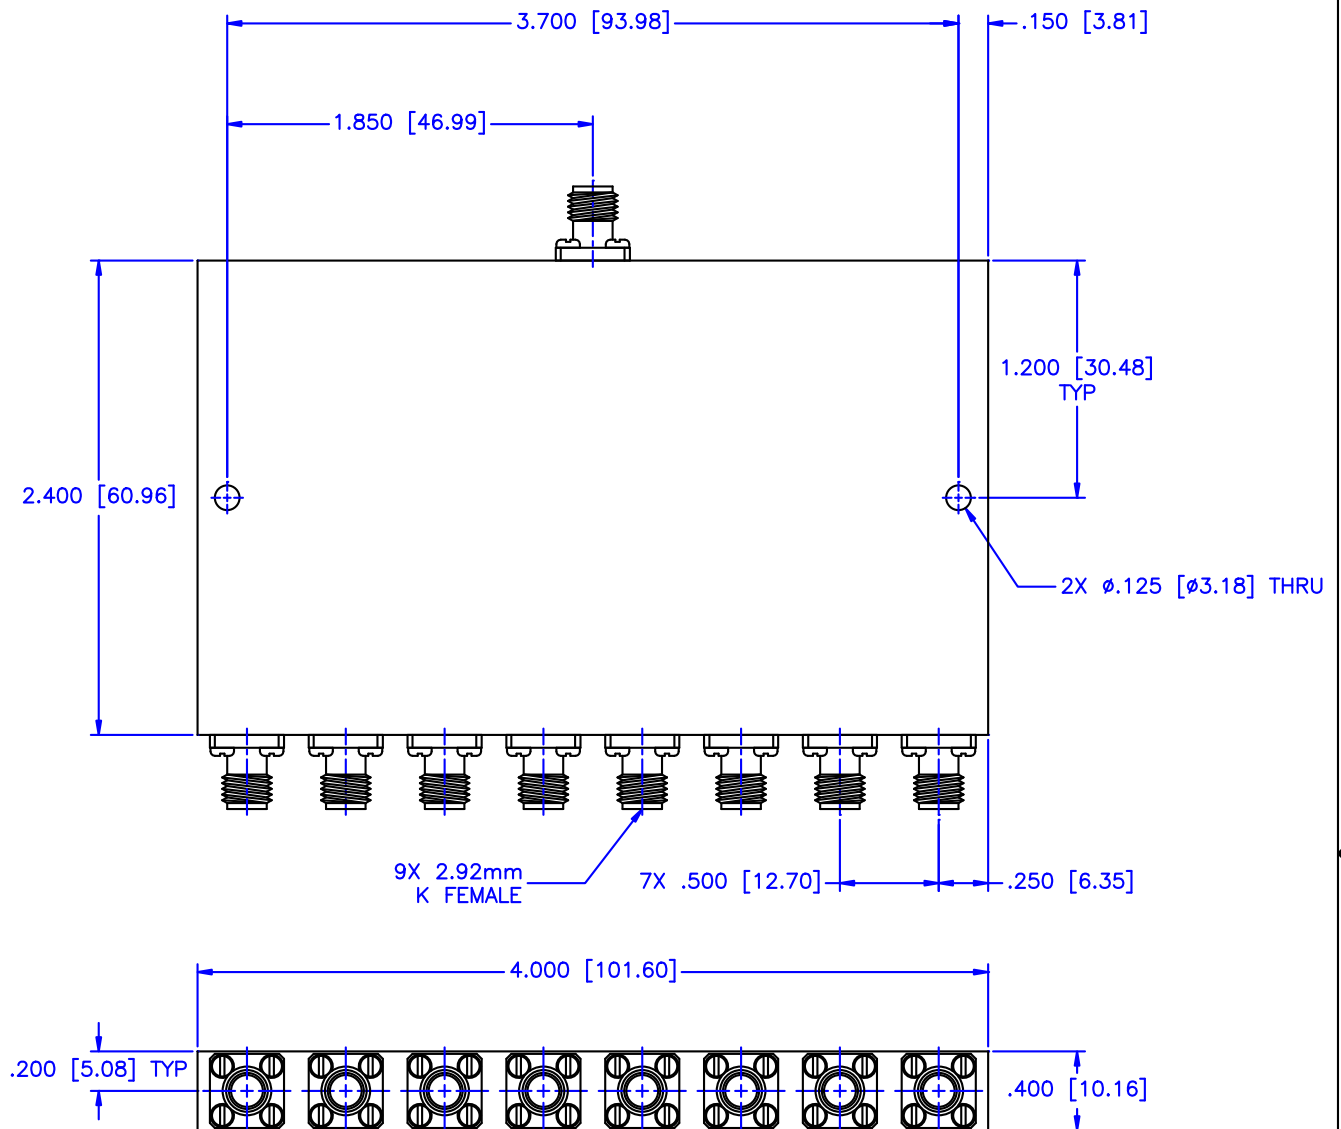

SPECIFICATIONS

Frequency Range: 18–40 GHz
 Insertion Loss: 3.6dB Max.
 Isolation: 17dB Min.
 VSWR: 1.70:1 Max.
 Phase Balance: 7 Deg. Max.
 Amplitude Balance: 0.8dB Max.
 Power Rating: 5W Avg, 1kW Peak
 Operating Temperature: –32°C to +85°C

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan DATE: 11-02-2012		DRAWING TITLE: 8-WAY POWER DIVIDER			
		PART NO. PS8-54			
APPROVED: T. Nguyen DATE: 11-02-2012		CAGE CODE: 0D2L5		SIZE: A REV: B DO NOT SCALE THE DRAWING	DWG NO. 84911